



GREEN PROTECT

Protection of Renewable Resources

Cylindrical fuses for PV applications

Cylindrical fuses for battery storage applications

NH fuses for PV applications

NH fuses for PV inverters' protection

NH fuses for battery storage applications

NH fuses for protection of high power DC EV chargers

Lightning and Surge Arresters for PV applications

Switch disconnectors for PV applications

Ready made DC-junction boxes

f @ in v
/etigroup

ETI
SWITCH TO
A SAFE FUTURE



Table of contents

DC - distribution and protection components	5
Cylindrical fuse-links for PV applications	7
Cylindrical fuse-links for battery storage applications	17
Fuseholders and accessories for cylindrical fuse-links	25
NH fuse-links for PV applications	41
NH fuse-links for PV inverters' protection	61
NH fuse-links for battery storage applications	81
NH fuse-links for protection of high power DC EV chargers	115
NH fuse bases for DC applications	121
NH fuseholders and disconnectors for DC applications	131
Lightning and Surge Arresters for PV applications	153
Switch disconnectors for PV applications	171
Distribution boards	184
Ready made DC-junction boxes	185

DC Distribution and Protection Components

Introduction

Photovoltaic systems are composed by photovoltaic panels, cables, fuses, switches, overvoltage arresters and power inverter. Photovoltaic panels utilise the power of sun light to converters photons to DC current.

Electricity generated by solar panels is then fed into a power inverter that converts DC current to AC current. gPV fuse has been developed to protect cable and panel against "reverse" overcurrent.

ETITEC B, C-PV series of over voltage surge protective devices has been developed to protect against direct and indirect lightning discharges and is intended to protect photovoltaic systems.

The circuit topology consists of two varistors stages each protected by a thermal disconnection device.

Overcurrent protection

PV module protection from »DC REVERSE« current on DC side

Array with three or more strings of panels:

PV systems that have three or more strings connected in parallel need to have each string protected by fuses.


Systems that have less than three strings will not generate enough fault current to damage the conductors/solar panels.

Normally there are two gPV fuses connected on each string (+ and - pole), that protect conductors/solar panels from damage and eliminate any safety hazards.

Fuses isolate the faulted string. The rest of PV system can continue to generate electricity.

PV module protection from »AC REVERSE« current caused by defective inverter

If an inverter becomes defective (transformerless...), AC reverse current can feed into DC strings and destroy PV modules.

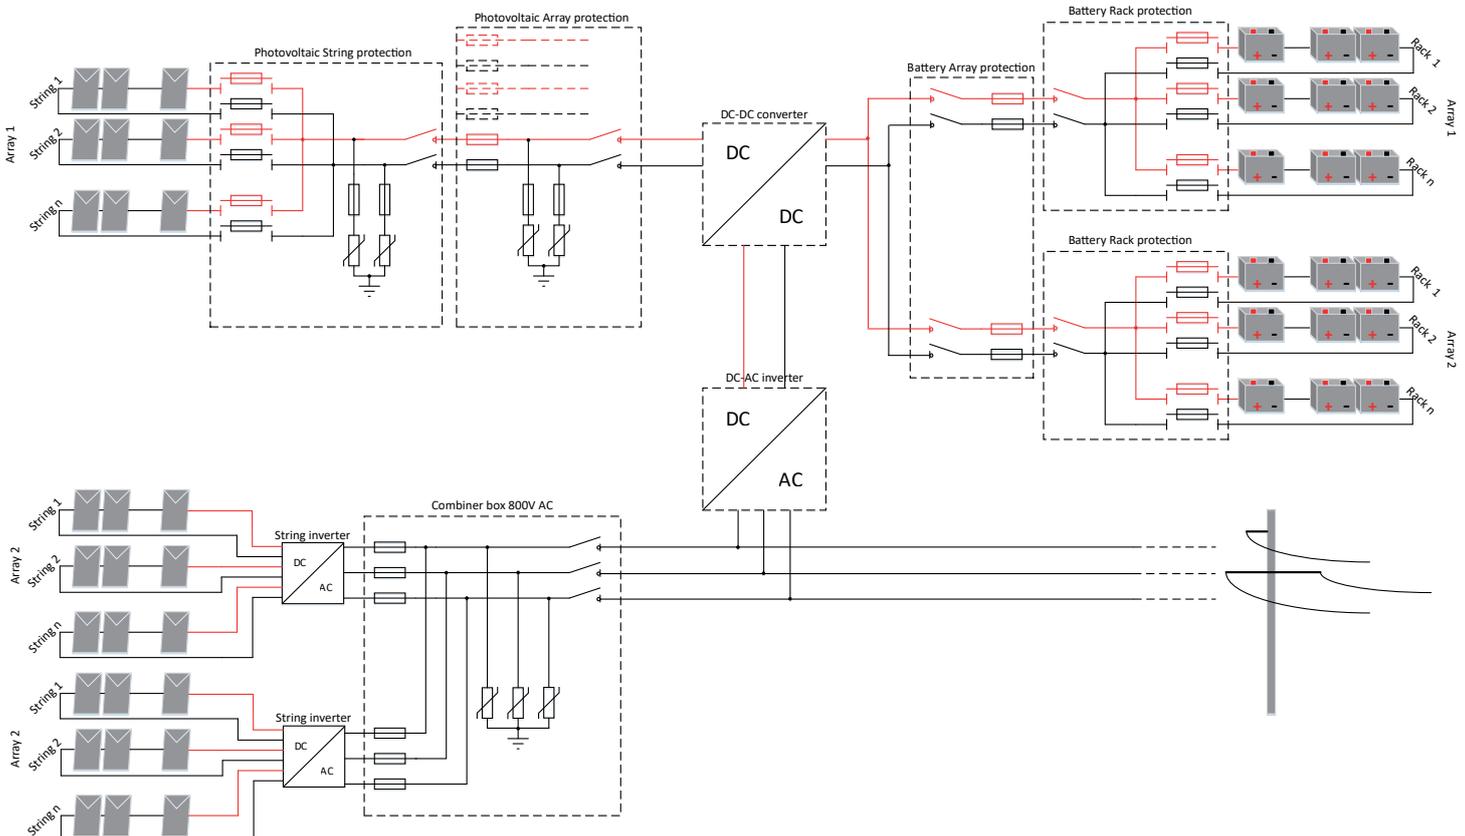

Applications



PROTECTION OF PV SYSTEMS




 etigroup
www.etigroup.eu

**Cylindrical Fuse-links
with gPV Characteristic**

ETI
SWITCH TO
A SAFE FUTURE

Photovoltaic String Protection

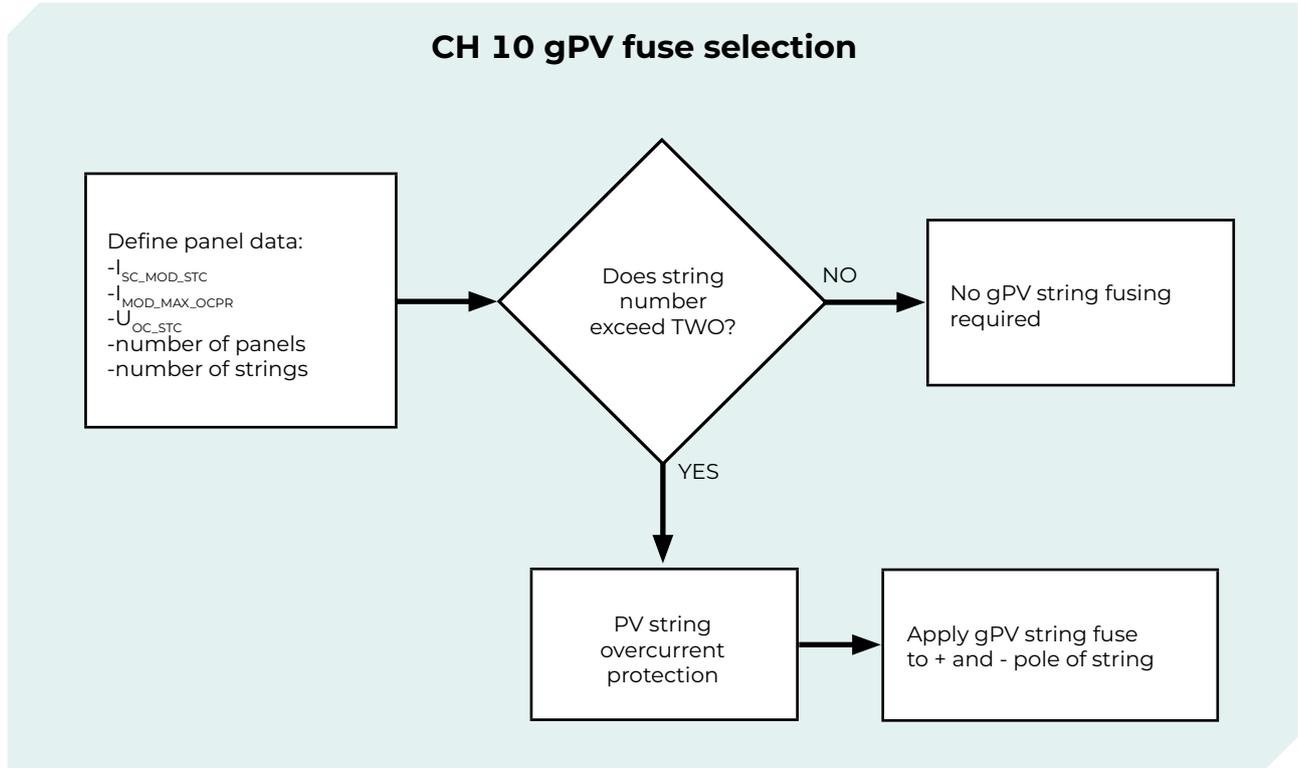

PV string overcurrent protection:

$I_n > 1,5 \times I_{sc_MOD_STC}$ – the short circuit current of a PV module or PV string at STC

$I_n < 2,4 \times I_{sc_MOD_STC}$

$I_n \leq I_{MOD_MAX_OCPR}$ – the PV module max. overcurrent protection rating

$U_n \geq 1,2 \times U_{OC_STC} \times \text{No. of PV modules}$

I_n – nominal overcurrent protection rating

U_n – nominal overcurrent protection voltage

Use temperature derating factor.

ETI as one of the most important European producer of overcurrent protection equipment and devices participating in many working groups for standards development at International Electrotechnical Commission (IEC). ETI is member of maintenance team MT9 belonging to the 32B group, working on the part 6 of the IEC 60269 dealing with supplementary requirements for fuse-links for the overcurrent protection of solar photovoltaic energy systems.

gPV fuse-link must be selected acc. standard IEC 62548

CH10 gPV 1000V - Fuse-links

General characteristics


UL file: E347771

Rated voltage	1000V d.c. L/R=2ms
Rated current	0,5 - 25A
Breaking capacity	10kA d.c. UL / 30kA d.c. IEC
Standards	IEC 60269-6, UL 248-19
Application	For protection of photovoltaic modules.



CH10x38 gPV 1000V d.c.


Size	Breaking capacity [kA]	I _n [A]	Code No. "standard contacts" 10kA UL	Code No. "standard contacts" 30kA IEC	Code No. "type SU contacts" 30kA IEC	Pre-arcing Joule integral [A ² s] L/R=2ms	Operating Joule integral [A ² s] L/R=2ms	Power dissipation [0,7 x I _n] ² Pd [W]	Power dissipation [I _n] ² Pd [W]	g	SU: 10	SU: 10/380
0,5	/	/	/	002625134	002625131	0,02	0,07	0,2	0,5			
1	/	/	/	002625138	002625129	1,5	3	0,4	1,0			
2	002625101		002625101	002625065	002625115	1,7	2,3	0,5	1,1			
3	002625100		002625100	002625067	002625113	2,8	5,4	0,7	1,6			
3,5	002625135		002625135	002625068	002625127	2,5	7	0,6	1,4			
4	002625102		002625102	002625069	002625116	3,9	11,7	0,5	1,3			
5	002625111		002625111	002625070	002625124	8	21	0,6	1,5			
6	002625103		002625103	002625071	002625117	10,6	34,6	0,7	1,8			
7	002625110		002625110	002625072	002625114	16	60	0,7	1,7	10	10/500	
8	002625104		002625104	002625073	002625118	17	65	0,8	1,9	SU: 12	SU: 10/380	
10	002625105		002625105	002625075	002625119	8,3	33	1,0	2,4			
12	002625106		002625106	002625077	002625120	22	73	0,8	1,9			
13	002625137		002625137	002625078	002625128	21	70	1,0	2,3			
14	002625136		002625136	002625079	002625126	28	92	1,3	3,0			
15	002625112		002625112	002625080	002625125	49	145	1,0	2,2			
16	002625107		002625107	002625081	002625121	48	147	1,1	2,6			
20	002625108		002625108	002625085	002625122	86	245	1,3	3,2			
25	/	/	/	002625139	002625140	110	470	1,7	4,1			

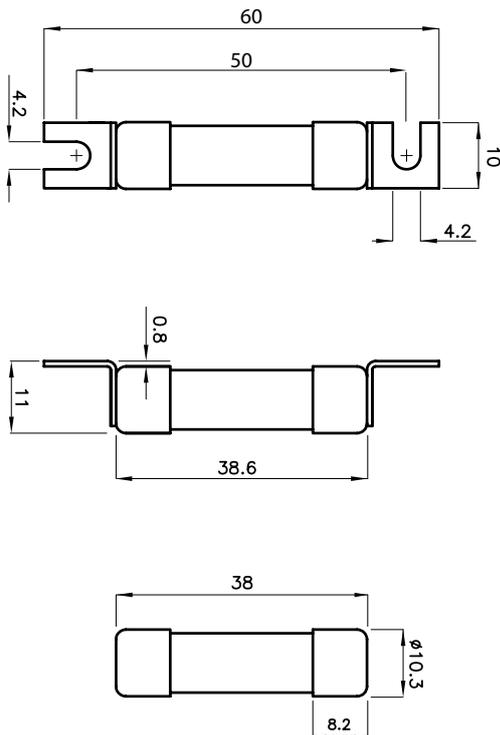


Standard Contacts

Type SU Contacts

Time current characteristics I/t

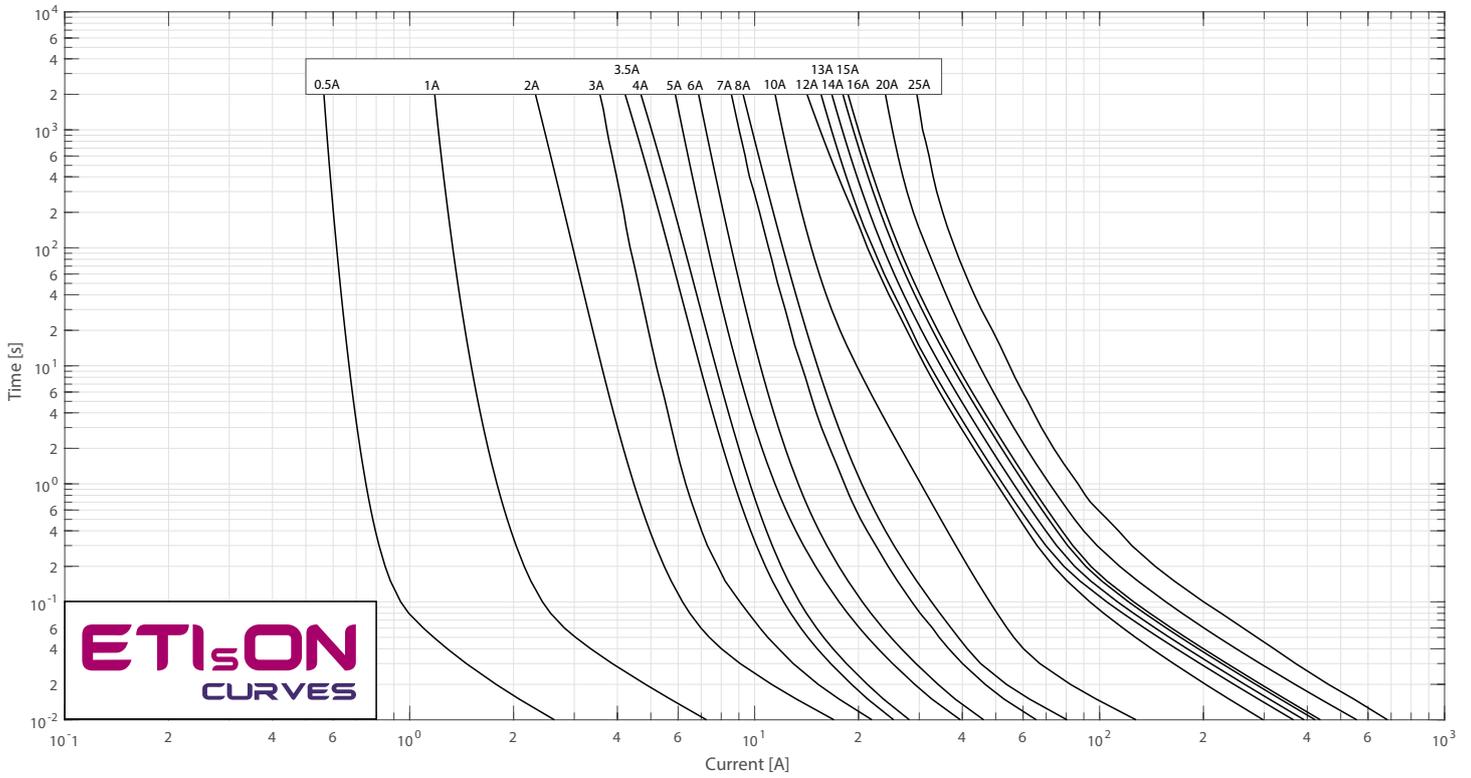

Ambient air temperature of fuse-link

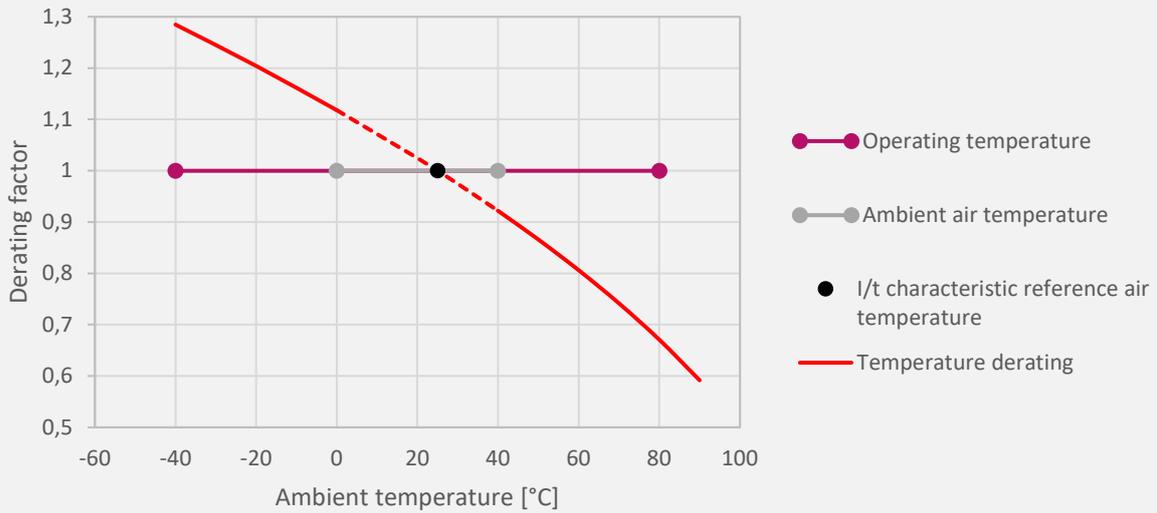

Legend:

T_{amb} – Ambient Temperature

TDF – Temperature Derating Factor

I_N – Nominal Current of Fuse-link

I_{TDF} – Nominal Current Including Temperature Derating Factor

Current calculation: $I_{TDF} = I_N \times TDF$

1500V Cylindrical gPV Fuse-links

ETI developed a new generation of PV cylindrical fuse-links with nominal currents up to 63A and rated voltage up to 1500V, with gPV characteristic for protecting solar panels against the reverse current. New fuse-links have a lower power dissipation and higher breaking capacity up to 50 kA. Size 10/14x85 has a patented design for interrupting in case of short circuit conditions. All current range of fuse-links can be mounted in EFH 10/14x85 fuse-holder.

VERSION UP TO 40A 1500V



UL certified with breaking capacity 50kA



VERSION UP TO 63A 1500V




Pure silver melting-element

Silver plated contacts



Parallel connection - lower temperature rise



Perfect length for 1500V, enough of space for 63A

Entire 1500V current range can be mounted in the same fuse-holder.



Environment-friendly ceramic fuse-link body



Patented design for interrupting in case of short circuit conditions



CH10 gPV 1500V - Fuse-links

General characteristics

UL file: E347771

Rated voltage	1500V d.c. L/R=2ms
Rated current	2 - 63A
Breaking capacity	50kA d.c.
Standards	IEC 60269-6, UL 248-19
Application	For protection of photovoltaic modules



CH10x85 & CH10/14x85 gPV 1500V d.c.

Size	Breaking capacity [kA]	I _n [A]	Code No. "standard contacts" UL	Code No. "type SU contacts"	Code No. "In-Line"	Pre-arcing Joule integral [A ² s] L/R=2ms	Operating Joule integral [A ² s] L/R=2ms	Power dissipation [0,7 x I _n] Pd [W]	Power dissipation [I _n] Pd [W]		
10x85	50kA	2	002625200	002625210	002626300	0,8	2,3	1,0	2,4	15 SU:17 IN: 22	10/210 SU:10/160 IN: 9/144
		3	002625241	002625245	002626301	2,9	5,2	1,1	2,7		
		4	002625274	002625211	002626302	11,4	16,9	1,1	2,7		
		5	002625276	002625209	002626303	7,0	25,9	1,2	3,0		
		6	002625277	002625212	002626304	14,5	50,6	1,2	3,0		
		8	002625279	002625213	002626306	36,1	106,9	1,5	3,6		
		10	002625280	002625214	002626307	7,0	116,6	1,2	2,8		
		12	002625282	002625215	002626308	10,3	152,0	1,4	3,3		
		15	002625285	002625219	002626309	28,2	307,4	1,5	3,6		
		16	002625286	002625216	002626310	34,2	352,1	1,5	3,6		
10/14x85	50kA	20	002626234	002625217	002626311	48,4	462,2	2	4,8	28	10/230
		25*	002625500	/	/	100,0	750,0	2,4	5,7		
		25	002626235	/	/	72,3	633,1	2,3	5,6		
		30	002626236	/	/	143,8	959,2	2,6	6,4		
		32	002626237	/	/	158,5	938,7	3,0	7,4		
		35*	002626238	/	/	260	1.500	2,9	7		
10/14x85T	50kA	40*	002626239	/	/	400	2.500	3,2	7,7	56	5/115
		50	002626240	/	/	350	2.000	5,3	13		
		63	002626241	/	/	770	4.300	5,6	13,7		

* Self certified





10x85

SU contacts

In-Line

10/14x85

10/14x85 T

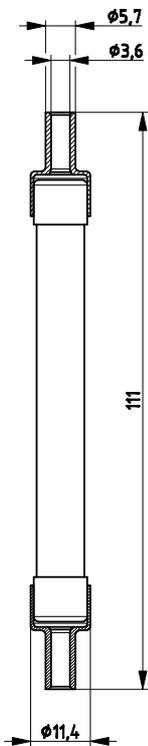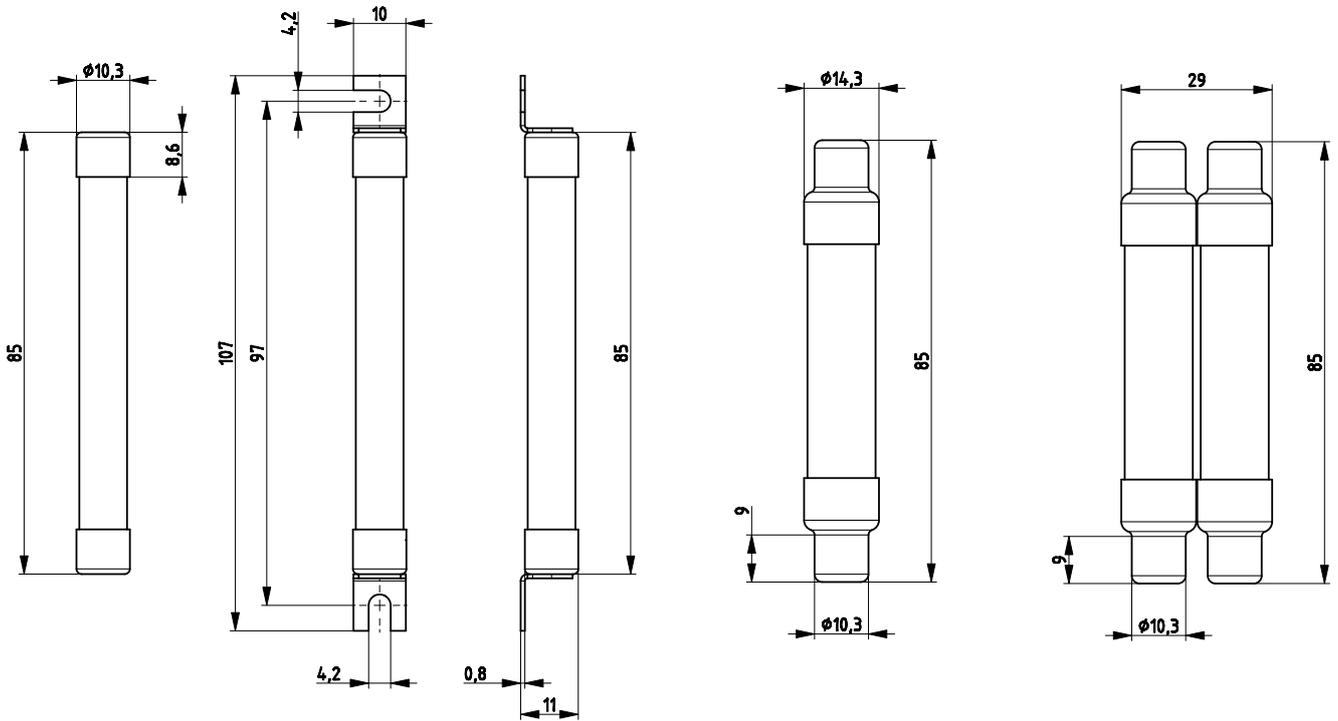


CH In-Line



Fuse-links in accordance with TUV 2 PfG 2380:2014-02

Crimp connection: 4-6mm²

Recommended crimping tool: Amphenol Helios H4

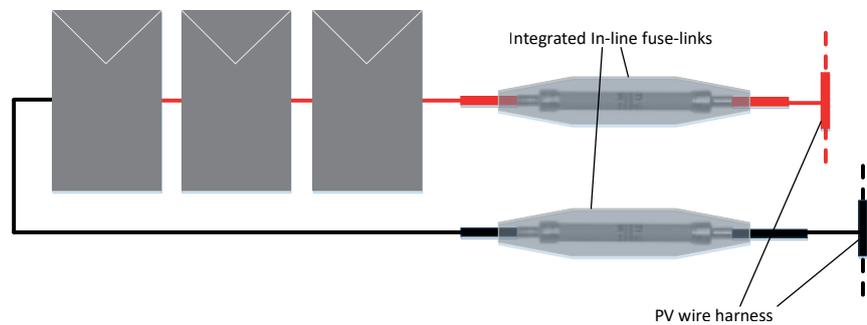

Time current characteristics I/t

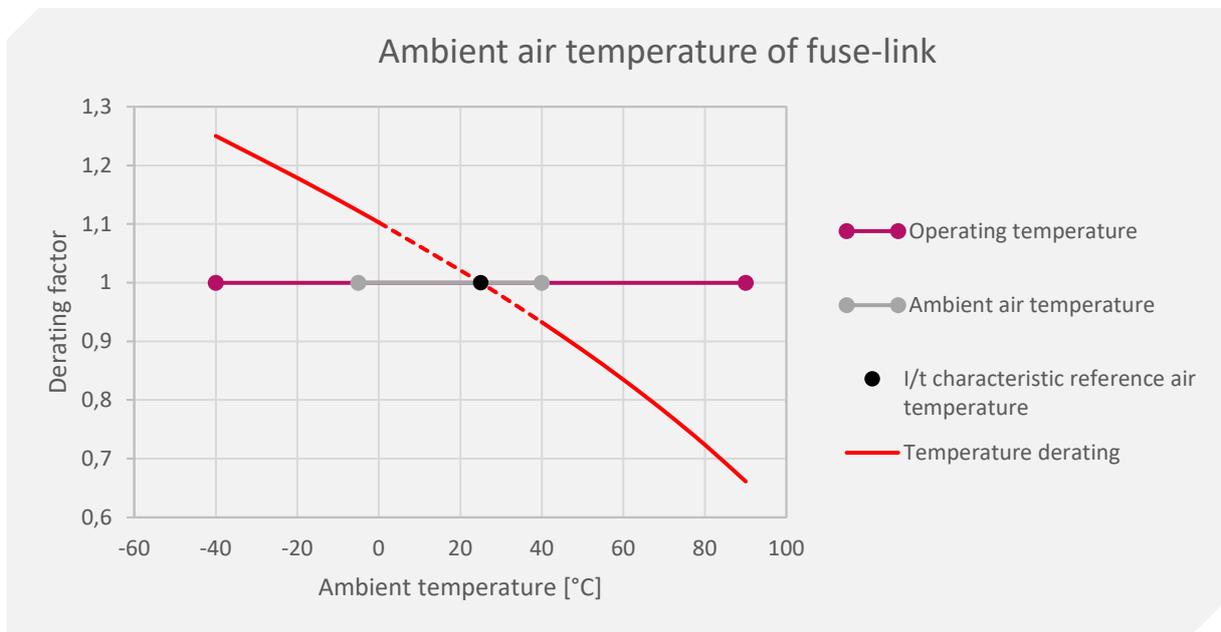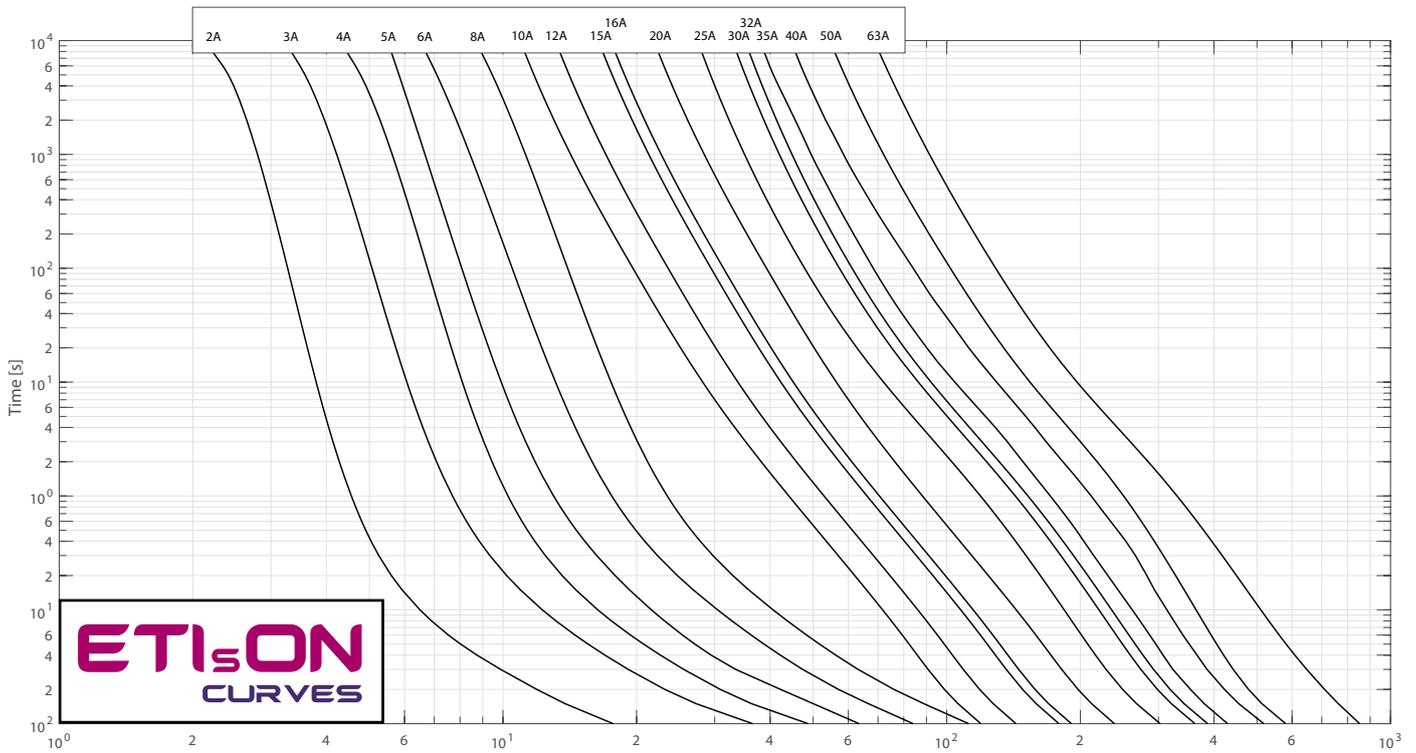

Legend:

T_{amb} – Ambient Temperature

TDF – Temperature Derating Factor

I_N – Nominal Current of Fuse-link

I_{TDF} – Nominal Current Including Temperature Derating Factor

Current calculation: $I_{TDF} = I_N \times TDF$

CH14 gPV 1000V, 1100V - Fuse-links

General characteristics


Rated voltage	1000V d.c. L/R=2ms (1100V d.c. for 002637185)
Rated current	15-36A
Breaking capacity	30kA d.c.
Standards	IEC 60269-6
Application	For protection of photovoltaic modules




CH14x51 gPV 1000V d.c.

Size	Breaking capacity [kA]	I _n [A]	Code No. "standard contacts" 30kA IEC	Code No. "type SU contacts" 30kA IEC	Pre-arcing	Operating	Power	Power	g	Box
					Joule integral [A ² s] L/R=2ms	Joule integral [A ² s] L/R=2ms	dissipation [0,7 x I _n] Pd [W]	dissipation [I _n] Pd [W]		
14x51	30kA	15	002637140	002637340	22	237	1,4	3,1	19	10/200
		16	002637105	002637305	55	155	1,4	3,1		
		16*	002637185	/	55	220	1,4	3,1		
		20	002637107	002637307	130	330	1,5	3,2		
		25	002637109	002637309	180	360	2	4		
		32	002637111	002637311	297	1.290	2,1	5,1		
		36	002637115	002637315	450	1.190	2,3	5,6		


*Rated voltage 1100V d.c.

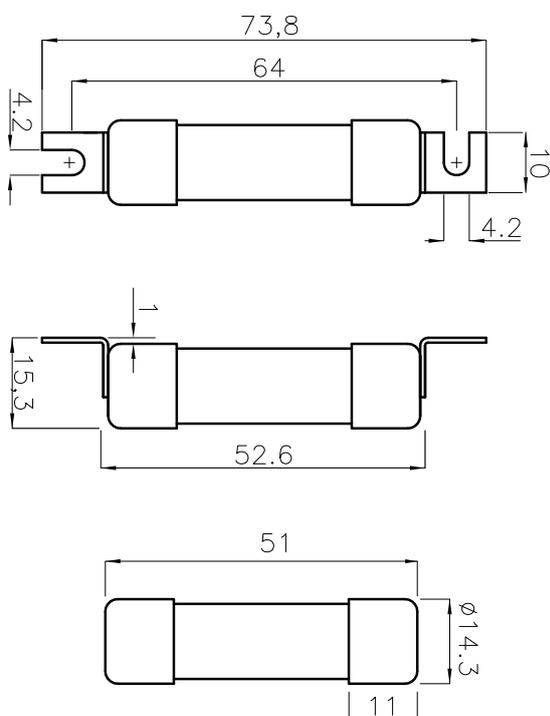

Time current characteristics I/t

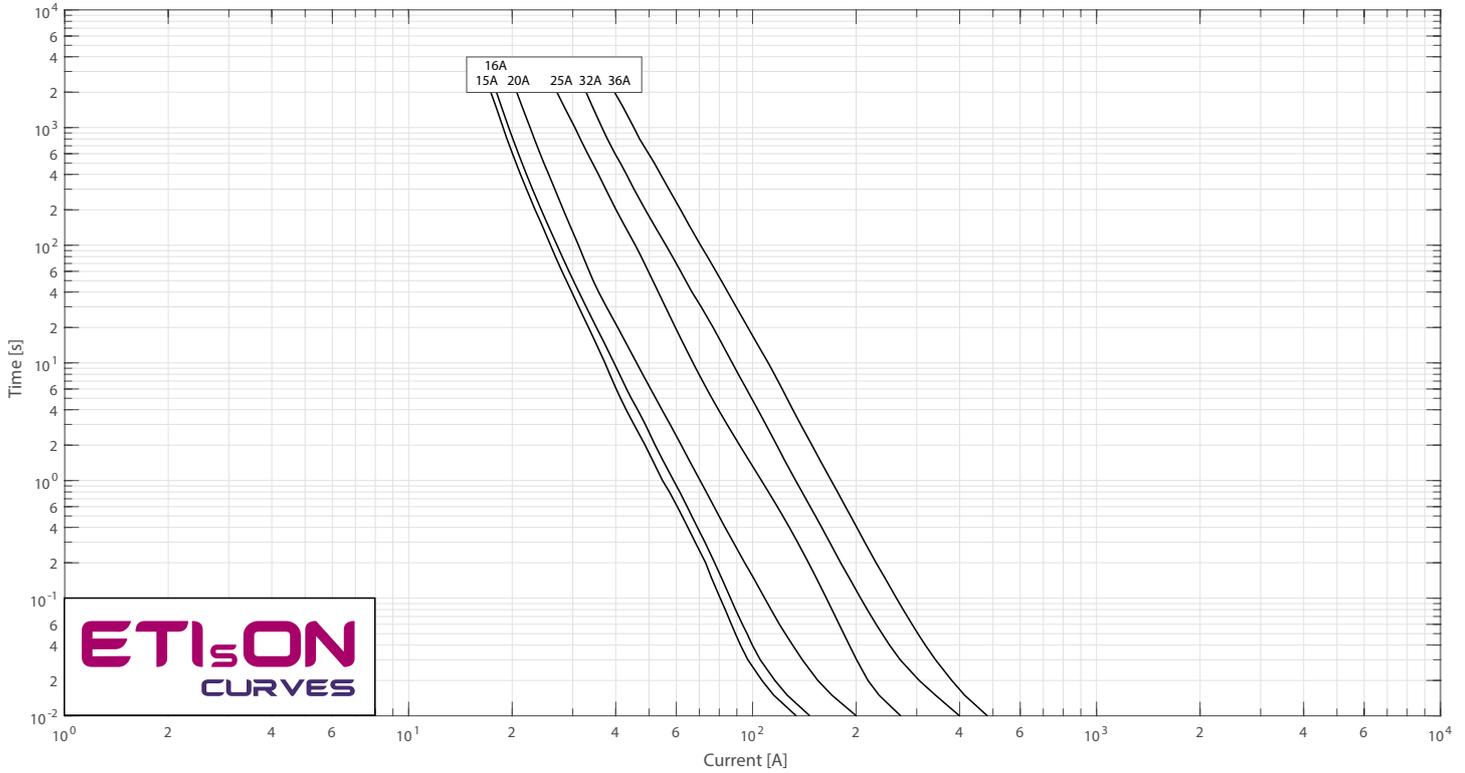

Ambient air temperature of fuse-link

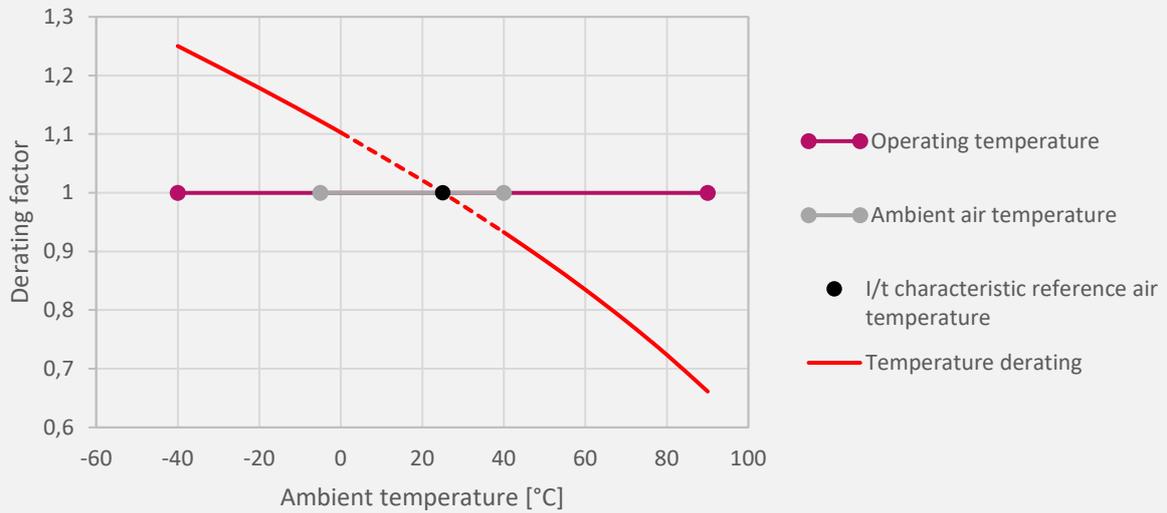

Legend:

T_{amb} – Ambient Temperature


TDF – Temperature Derating Factor

I_N – Nominal Current of Fuse-link

I_{TDF} – Nominal Current Including Temperature Derating Factor

Current calculation: $I_{TDF} = I_N \times TDF$

BATTERY FUSE

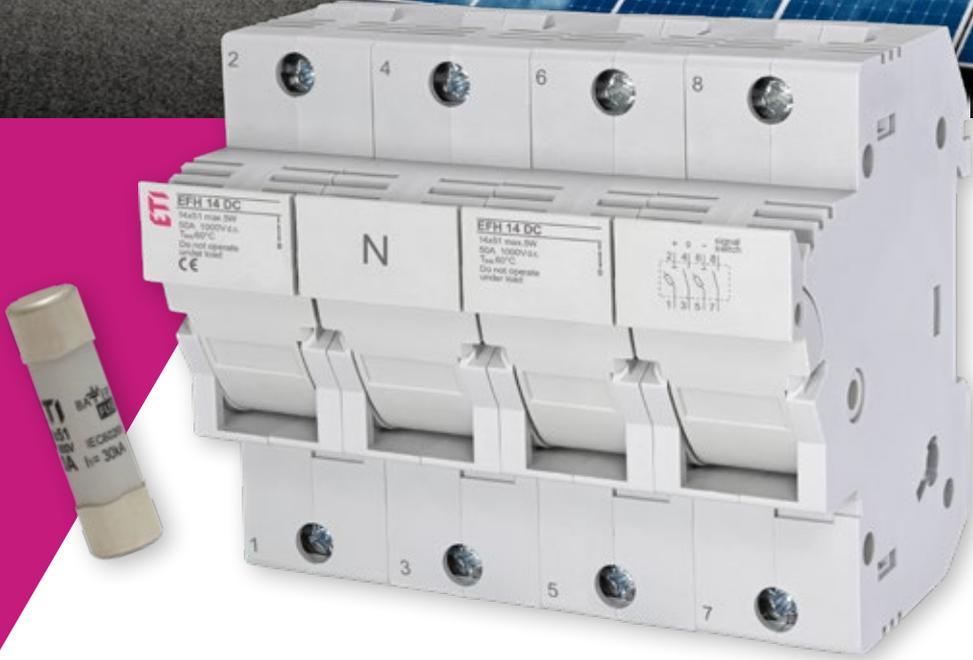

 etigroup
www.etigroup.eu


$\frac{\perp}{+}$
BATTERY
FUSE

BECAUSE EVERY
SECOND COUNTS

**Cylindrical Fuse-links
with gBat Characteristic**

ETI
SWITCH TO
A SAFE FUTURE

Battery Storage Fuse Selection

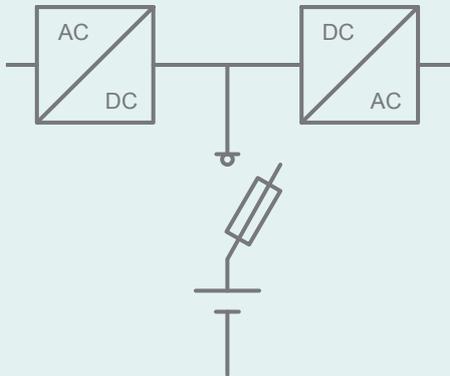


Short circuit current

- Short circuit current depending on battery model, type and capacity, low compared to operating current
- Short circuit current has to be interrupted in <5 seconds
- Required steep characteristics: protection with Battery fuse-link required!

Operating current

- Operating current depends on battery storage specification
- Battery operation: voltage of DC link circuit decreases to the final discharge voltage
- Consider maximum current at final discharge voltage for fuse-link selection

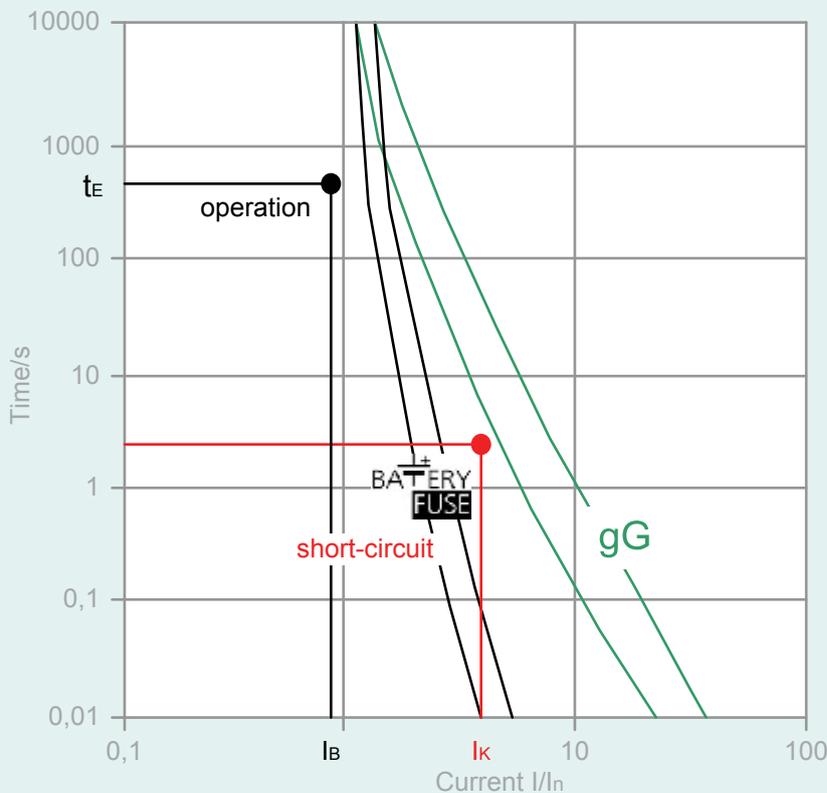

In accordance with IEC 60269-7

Short circuit point (I_k)

- Short circuit current depending on battery model and type
- Manufacturer datasheets to include short circuit current according to IEC896
- Operating point has to be in adequate distance below the curve
- Short-circuit point has to be above the range of tolerance of the curve

Operating point (t_E/I_B)

- maximum operating current I_B has to be calculated from battery storage true power and final discharge voltage U_E : $I_B = P_W/U_E$
- t_E is the back-up time of battery storage system

When choosing fuse switch disconnector consider fuse-link power dissipation!

$$P_d(I_B) < P_y$$

Power dissipation of fuse-link at maximal operating current (I_B):

$$P_d(I_B) = (I_B/I_n)^2 \times P_d(I_n)$$

I_B - maximal operating current

$P_d(I_B)$ - power dissipation of fuse-link at maximal operating current

$P_d(I_n)$ - power dissipation of fuse-link at nominal current

P_y - maximal permissible fuse-link power dissipation mounted in fuse switch disconnecter

CH 10x38 gBat Fuse-link 550V d.c.

General characteristics

Rated voltage	550V d.c. (L/R=10ms)
Breaking capacity	30kA d.c.
Standard	IEC 60269-7
Application	Battery protection
Fuse base	EFH 10 DC

CH gBat fuse-link

Size	I_n	Code No. "standard contacts" 550V DC	Code No. "type SU contacts" 550V DC	Pre-arcing Joule integral L/R=10ms	Operating Joule integral L/R=10ms	Power dissipation [0,7 x I_n] Pd	Power dissipation [1x I_n] Pd		
	[A]	30kA	30kA	[A ² s]	[A ² s]	[W]	[W]		
10x38	2	002626002	002626102	1,1	1,8	0,47	1,12	10/12	10/500 SU: 10/380
	4	002626004	002626104	3,0	7,8	0,52	1,25		
	6	002626006	002626106	14,1	27,3	0,73	1,75		
	8	002626008	002626108	25,1	53,4	0,8	1,9		
	10	002626010	002626110	8,0	18,8	0,97	2,4		
	12	002626012	002626112	18,5	41,5	0,8	1,9		
	16	002626016	002626116	42	88	1,1	2,6		
	20	002626020	002626120	86	166	1,3	3,2		
	25	002626025	002626125	140	270	1,65	4,1		



Note:
CH Battery fuse-links are used in combination with fuse
disconnecter EFH 10 DC

Application

- /// in battery storage systems
- /// in UPS systems
- /// in e-mobility

CH 10x38 gBat Fuse-link 800V d.c.

General characteristics


Rated voltage	800V d.c. (L/R=10ms)
Breaking capacity	30kA d.c.
Standard	IEC 60269-7
Application	Battery protection
Fuse base	EFH 10 DC

CH gBat fuse-link


Size	I_n [A]	Code No. "standard contacts" 800V DC 30kA	Code No. "type SU contacts" 800V DC 30kA	Pre-arcing Joule integral L/R=10ms [A ² s]	Operating Joule integral L/R=10ms [A ² s]	Power dissipation [0,7 x I_n] Pd [W]	Power dissipation [1x I_n] Pd [W]		
10x38	2	002626030	002626130	1,2	1,6	0,47	1,12	10/12	10/500 SU: 10/380
	4	002626032	002626132	3,6	8,9	0,52	1,25		
	6	002626034	002626134	9,5	27,2	0,73	1,75		
	8	002626036	002626136	27,3	65,8	0,8	1,9		
	10	002626038	002626138	8,2	26,6	0,97	2,4		
	12	002626040	002626140	20,6	54,6	0,8	1,9		
	16	002626042	002626142	44,4	109,3	1,1	2,6		



Note:
CH Battery fuse-links are used in combination with fuse
disconnecter EFH 10 DC

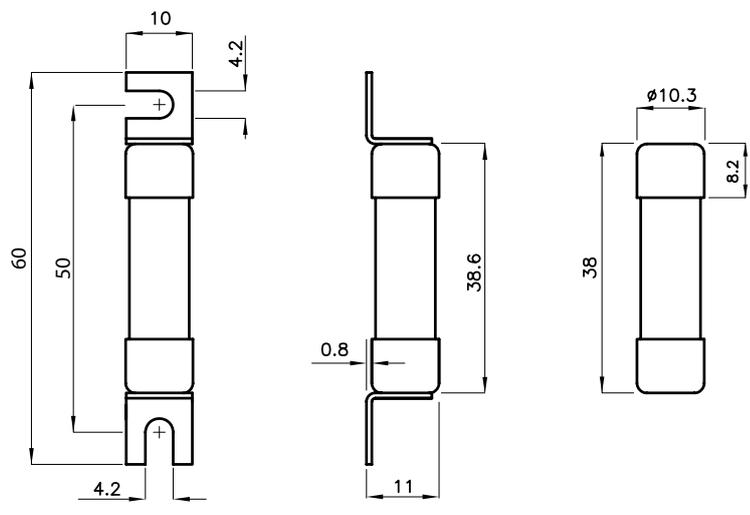

Time current characteristics I/t

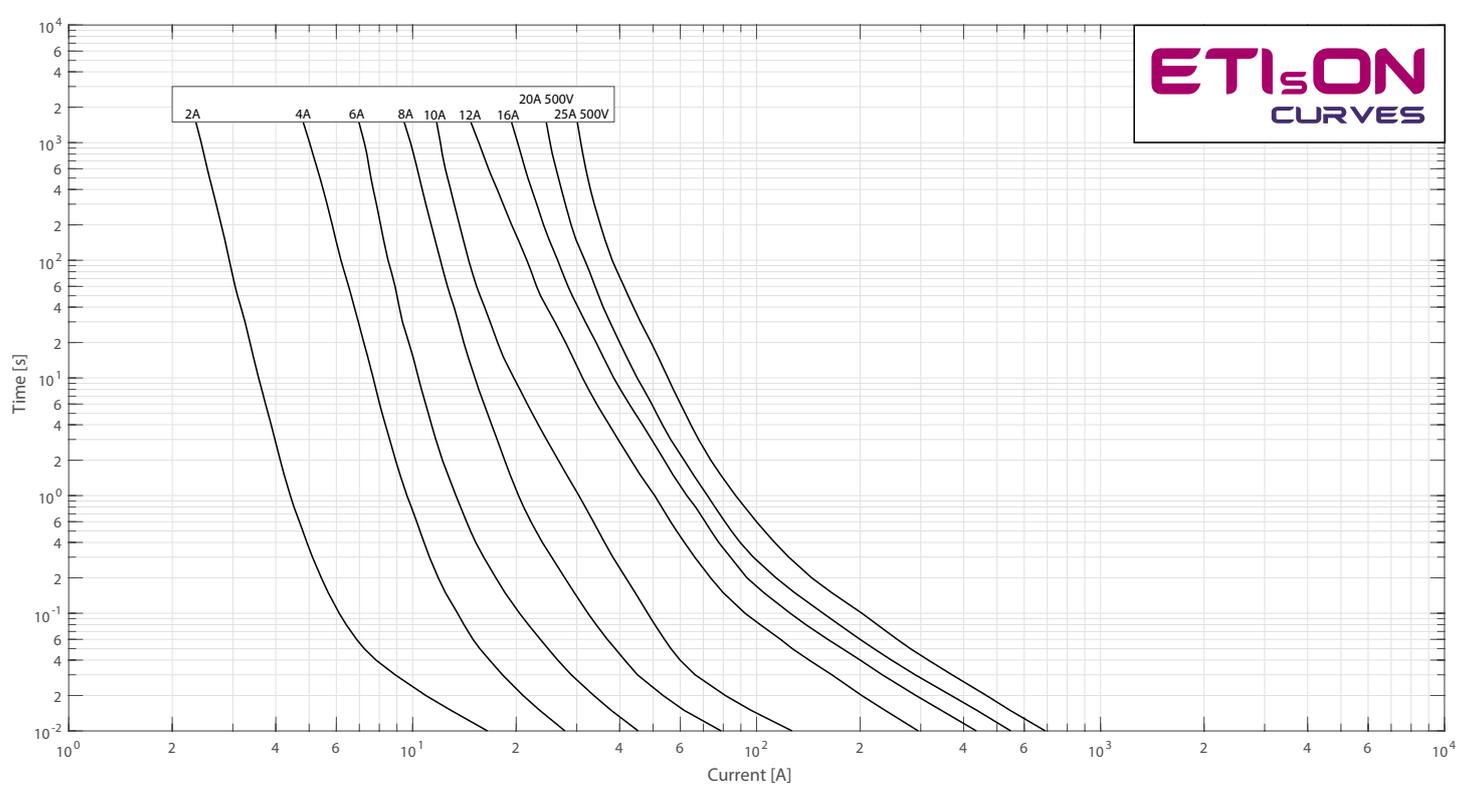

CH 14x51 gBat Fuse-link 800V d.c.

General characteristics


Rated voltage	800V d.c. (L/R=10ms)
Breaking capacity	30kA d.c.
Standard	IEC 60269-7
Application	Battery protection
Fuse base	EFH 14 DC

CH gBat fuse-link


Size	I_n [A]	Code No. "standard contacts" 800V DC	Code No. "type SU contacts" 800V DC	Pre-arcing Joule integral L/R=10ms	Operating Joule integral L/R=10ms	Power dissipation [0,7 x I_n] Pd	Power dissipation [1x I_n] Pd		
		30kA	30kA	[A ² s]	[A ² s]	[W]	[W]		
14x51	16	002637405	002637505	37	136	1,4	3,1	19/21	10/200 SU: 10/260
	20	002637407	002637507	80	284	1,5	3,2		
	25	002637409	002637509	128	438	2	4		
	32	002637411	002637511	296	1050	2,1	5,1		
	36	002637412	002637512	370	1160	2,3	5,6		




Note:
CH Battery fuse-links are used in combination with fuse
disconnecter EFH 14 DC

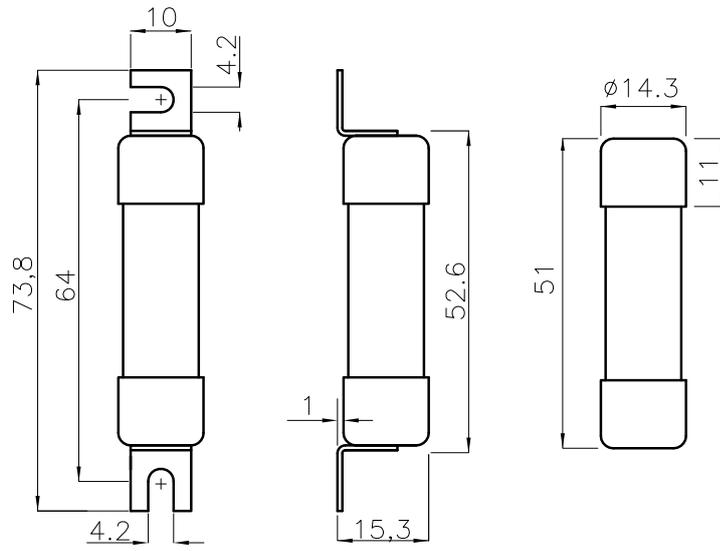

Time current characteristics I/t

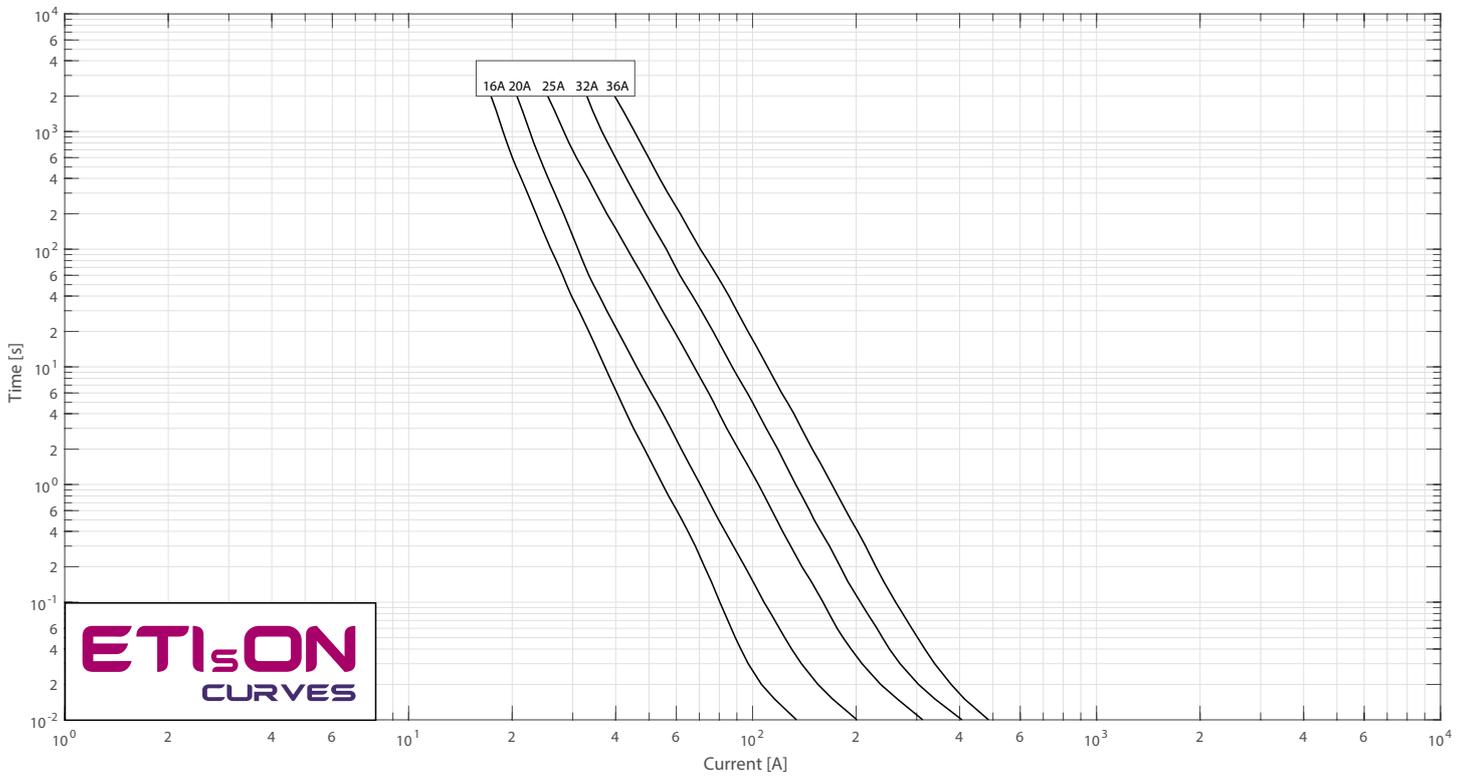

FUSEHOLDERS FOR CYLINDRICAL DC FUSE-LINKS

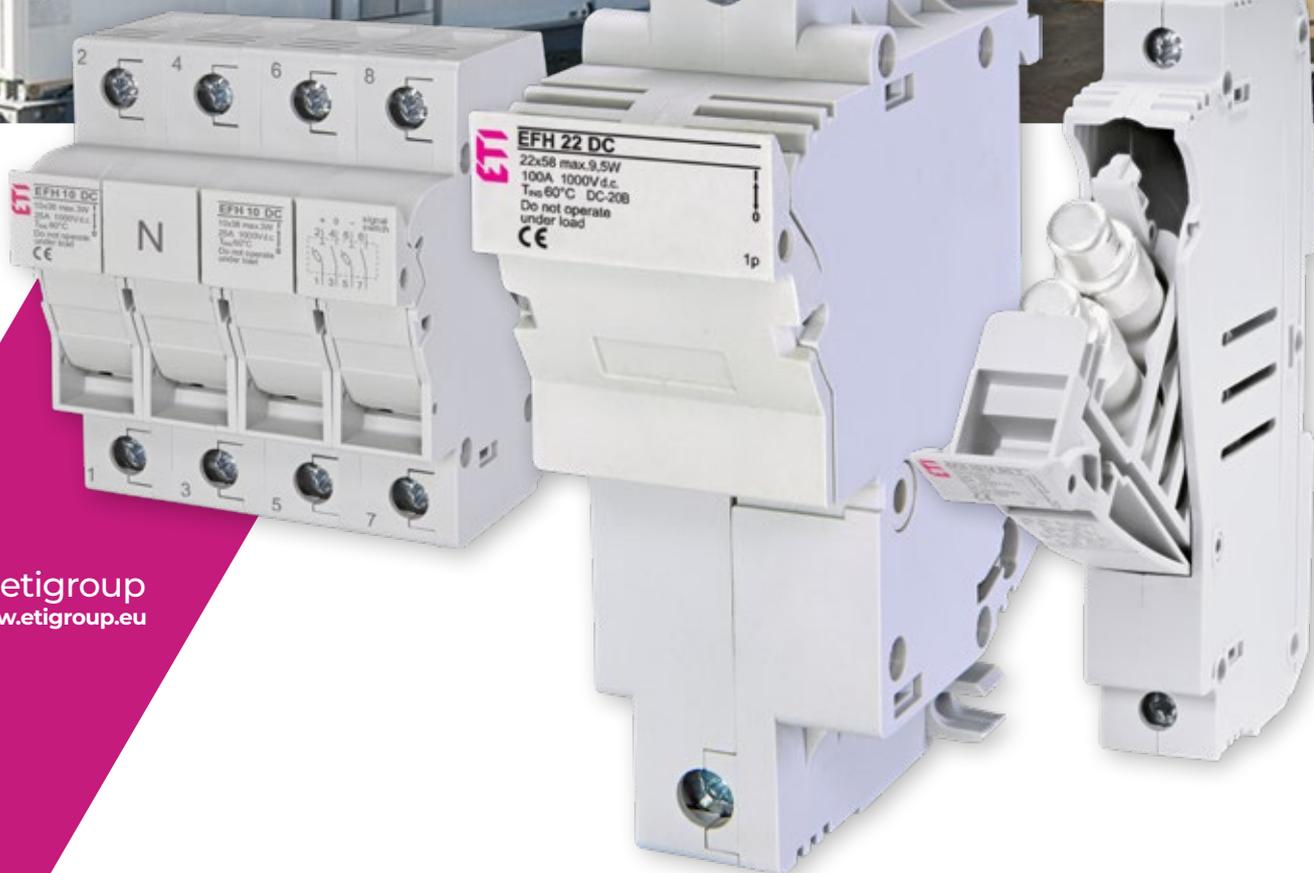

 etigroup
www.etigroup.eu

ETI
SWITCH TO
A SAFE FUTURE

C Fuse-switch disconnectors for cylindrical fuse-links

Fuse-switch disconnecter PCF


- Extraction of entire fuse-link when changing
- Chamber for spare fuse-link



- 1-pole + N in one module



- LED indicator version



- New method of mounting on the DIN rail and simple replacement



- Double connection clamps



- Can be used with C IR indication

- Sealing possibility



Technical data PCF

Fuse type	PCF 10		PCF CC
	CH 10x38		Class CC
	IEC	UL	UL
Versions	Without indicator / LED indicator		
Number of poles	1p, 1p+N, 2p, 3p, 3p+N	1p, 2p, 3p	
Rated operational voltage Ue	690V a.c.	600V a.c./d.c.	600V a.c./d.c.
Rated operational current Ie	32A	30A	30A
Maximum rated current of fuses links	690V	10A gG	
	500V	25A gG, 16A aM	
	400V	32A gG	
Rated frequency	50Hz	60Hz	60Hz
Rated short-time withstand current Icw	300A		
Rated conditional short-circuit current	100kA	200kA	200kA
Rated insulation voltage Ui	690V		
Rated imp. withstand voltage Uimp	4kV		
Overvoltage category	III		
Max power dissipation of the fuse-link (W)	gG: 3W / aM: 1,2W		
LED indicator operating range	50V-690V a.c.	50V-600V a.c., 80V-600V d.c.	
Utilization category	AC-22B	Do not operate under load	
Operational performance (cycles with current)	300		
Operational performance (cycles without current)	1700		
Humidity	90% at 20°C		
Operating ambient temperature	-5°C ... +40°C		
Store ambient temperature	-25°C ... +55°C		
Degree of protection (IEC 60529)	IP 20		
Terminal capacity	0,5-10mm ² , Double connection	20-10 stranded, Cu only	20-10 solid & stranded, Cu only
Screw	PZ M4	PZ M4	PZ M4
Torque	1,2Nm	1,2Nm	1,2Nm
Mounting on EN 60715 rail		35mm rail	
Sealing possibility		ON and OFF	
Standards - fuse links	IEC/EN 60269-2		UL 4248-4, IEC/EN 60269-2
Standards - fuse disconnectors/ fuse holders	IEC 60947-1, IEC 60947-3	UL 4248-1	UL 4248-1, UL 4248-4
Test reports	CCA/CB	UL	Int
Certificates		UR _{IS}	


Technical data PCF

Fuse type	PCF 10		PCF CC
	CH 10x38		Class CC
	IEC	UL	UL
Derating factor of current I _n for different ambient temperatures	20°	1	
	30°	0,95	
	40°	0,9	
	50°	0,8	
	60°	0,7	
	70°	0,5	
Derating factor of current I _n for side by side mounting fuse holders (nr. of poles)	1-4	1	
	5-6	0,8	
	7-9	0,7	
	≥10	0,6	

GREEN PROTECT / Fuseholders for Cylindrical DC Fuse-links

PCF 10 1000 V d.c.

Number of poles	U_c/U_i [V]	I_{max} [A]	Code No.	Max. power dissipation of the fuse-link per pole [W]	Indicator	 g	
1p	1000	25	002550601	3	-	63	12/108
			002550611		LED	64	
			002550603		-	124	
2p	1000	25	002550613	3	LED	125	6/54

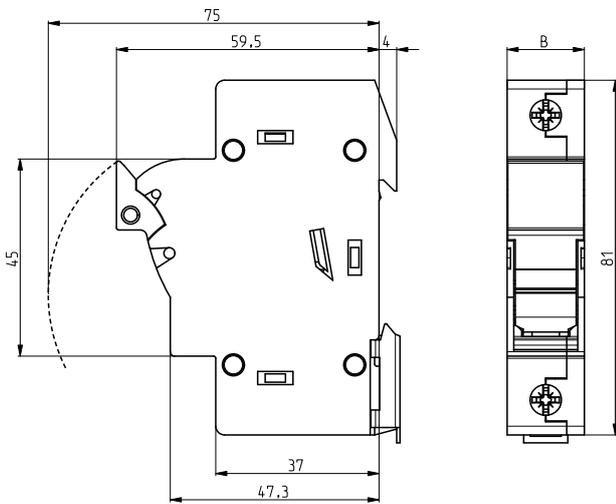

	B
1p	17,5
2p	35



Fuse holder EFH 1000V d.c.

/// All plastic parts are made of material resistant to extremely high temperatures



/// All contact surfaces are silver plated and fuse carrier assures that a fuse-link is not in touch with the housing



/// Compliance with IEC 60947-1, IEC 60947-3, UL 4248-1, UL 4248-19




/// Safe replacement of the fuse-link without touching live parts



/// Modular design – assemble multi-pole versions at the installation site



/// Possibility of sealing in ON or OFF positions



/// Increased grip area for easier opening of fuse carrier



/// Mounting on standard DIN 35 mm rail (DIN EN60715)

/// **ELECTRONIC INDICATION VERSION**
EFH L has a built-in LED diode which blinks after the fuse-link operates. Operating voltage ranges from 50V to 1000V d.c.



/// Complete protection against touch according to IP20



/// EFB input terminals can be used for power supply, and busbars can be used for grouping



Fuse holder EFH 10, 14, 22 1000V d.c.

General characteristics

Rated voltage	1000V d.c.
Rated current	25A, 50A, 100A
Utilization category	DC-20B (Do not operate under load)
Degree of protection	IP20
Standards	IEC 60947-1, IEC 60947-3, UL 4248-1, UL 4248-19


Technical data

		EFH 10 DC	EFH 14 DC	EFH 22 DC
Fuse type		CH 10x38	CH 14x51	CH 22x58
Versions		Without indicator, LED indicator		
Number of poles		1p, 2p, 2p+N+S		
Rated operational voltage Ue		1000V d.c.		
Rated operational current Ie		25A	50A	100A
Rated conditional short-circuit current		IEC 30kA, UL 10kA		30kA
Rated insulation voltage Ui		1000V		
Rated imp. withstand voltage Uimp		8kV		
Max power dissipation of the fuse-link		3W	5W	9,5W
Derating factor of current In for different ambient temperatures	20°C	1		
	30°C	0,95		
	40°C	0,9		
	50°C	0,8		
	60°C	0,7		
Derating factor of current In for side by side mounting fuse holders (nr. of poles)	70°C	0,5		
	1-4	1		
	5-6	0,8		
	7-9	0,7		
	≥10	0,6		
LED indicator operating range		80V-1000V d.c.		
Utilization category		DC-20B (Do not operate under load)		
Operational performance (cycles with current)		0		
Operational performance (cycles without current)		2000		
Inclined Plane Tracking (IPT)		60min at 1kV		
Humidity		90% at 20°C		
Ambient air temperature		-5°C ... +40°C		
Operating ambient air temperature		-40°C ... +90°C		
Storage ambient air temperature		-25°C ... +55°C		
Degree of protection (IEC 60529)		IP 20		
Terminal capacity		1-25mm ² AWG 18-8 solid&stranded Cu only	1,5-35mm ² AWG 16-6 solid&stranded Cu only	4-50mm ²
Screw		PZ M5		
Torque		2Nm 17,7 lb-in	2Nm 17,7 lb-in	2,5-3Nm
Mounting on EN 60715 rail		35mm rail		
Sealing possibility		ON and OFF		
Standards - fuse-links		IEC 60269-2, IEC 606269-6, IEC 60269-7 UL, 248-1, UL 248-19		IEC 60269-2, IEC 606269-6, IEC 60269-7
Standards - fuse holders		IEC 60947-1, IEC 60947-3 UL 4248-1, UL 4248-19		IEC 60947-1, IEC 60947-3
Test reports		UL		Internal
Certificates		UL Listed		

EFH 10 d.c.

Number of poles	U_c/U_i [V]	I_{max} [A]	Code No.	Max. power dissipation of the fuse-link per pole [W]	Indicator	 g	
1p	1000	25	002540201	3	-	63	12/108
			002540211		LED	64	
002540203			-		124	6/54	
002540213			LED		125		
2p+N+S*			002540204		-	257	3/27

*Only IEC certified

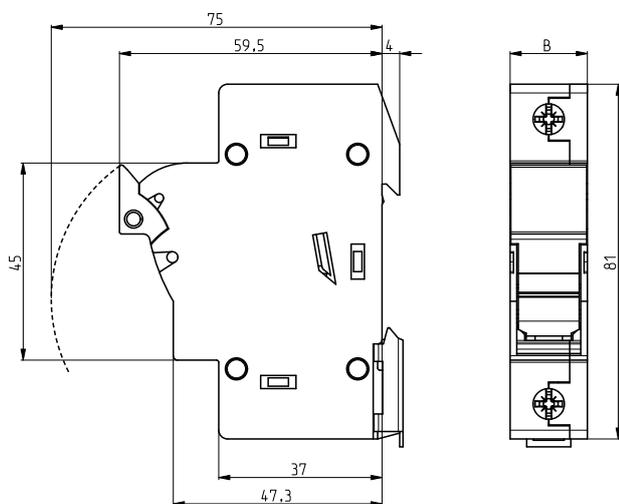

	B
1p	17,5
2p	35
2p+N+S	70




GREEN PROTECT / Fuseholders for Cylindrical DC Fuse-links


EFH 14 d.c.

Number of poles	U_e/U_i [V]	I_{max} [A]	Code No.	Max. power dissipation of the fuse-link per pole [W]	Indicator		
1p	1000	50	002560201	5	-	102	12/96
			002560211		LED	103	
2p	1000	50	002560203	5	-	206	6/48
			002560213		LED	208	
2p+N+S*			002560205		-	452	3/24

*Only IEC certified

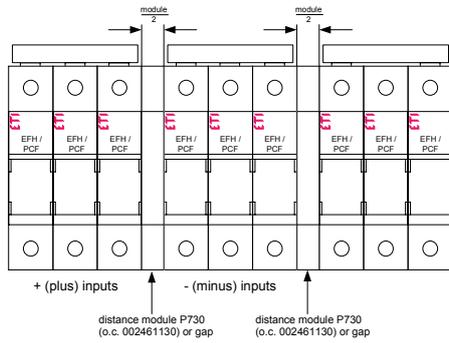

- * keep distance between group of three fuse holders
- ** put together up to three fuse holders in one group
- *** keep groups of + (plus) poles together and groups of - (minus) poles together but separated
- **** tighten contact screws using suggested torque and test torque again after some period of use

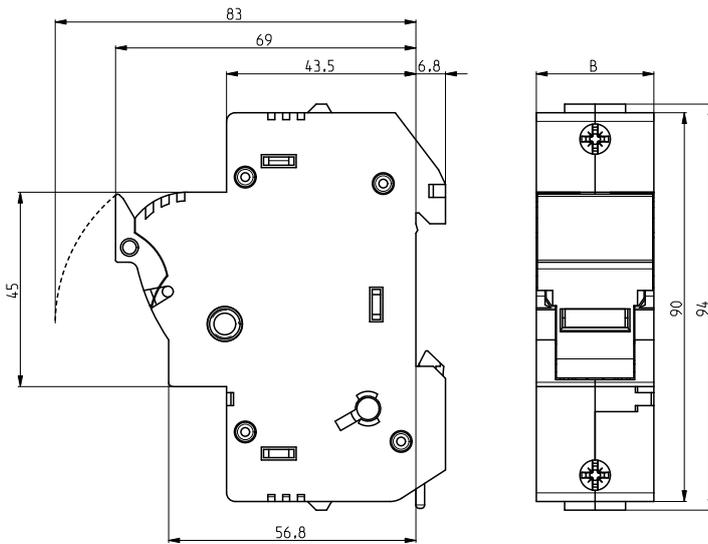


	B
1p	27
2p	54
2p+N+S	108



EFH 22 d.c.

Number of poles	U_c/U_i [V]	I_{max} [A]	Code No.	Max. power dissipation of the fuse-link per pole [W]	Indicator	 g	
1p	1000	100	002570201	9,5	-	156	3/105
			002570211		LED	158	
002570203			-		317	2/34	
002570213			LED		321		

Type	Dimensions [mm]
	B
1 pole	35,6
2 pole	71,2

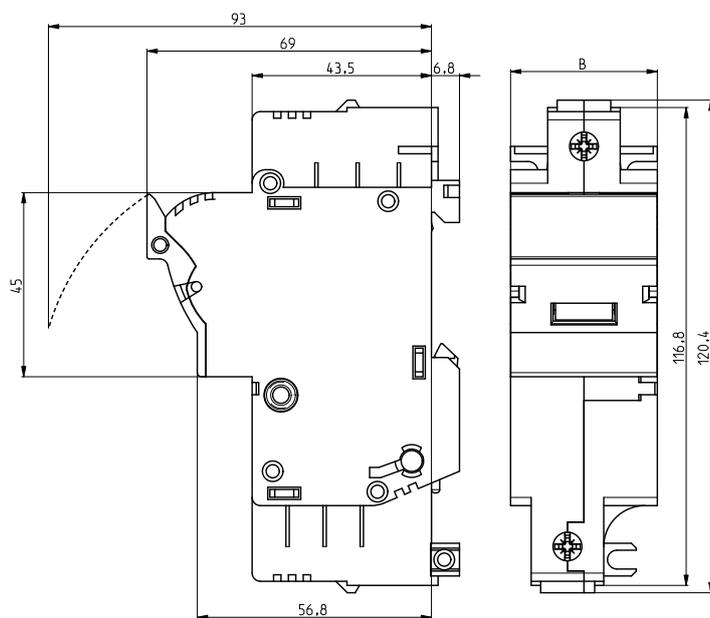


Accessories

Auxiliary switch PS EFD is intended to be mounted with fuseholders EFH 14 and EFH 22 for all versions (1p, 2p, 1p+N, 3p, 3p+N). The width of apparatus is 9 mm, other dimensions comply with EFH 14 and EFH 22 series. Auxiliary switch PS EFD signals the operation of CH14 or CH 22 fuse-links only in the case a fuse-link is fitted with striking pin - see IEC 60 269-2 Figure 1a (III).

Auxiliary switch PS EFD

U _n [V]	I _n [A]	Code No. EFD14	Code No. EFD22	 g		Contact
250	5	002569001	002579001	50	1/10	1 x make 1 x break

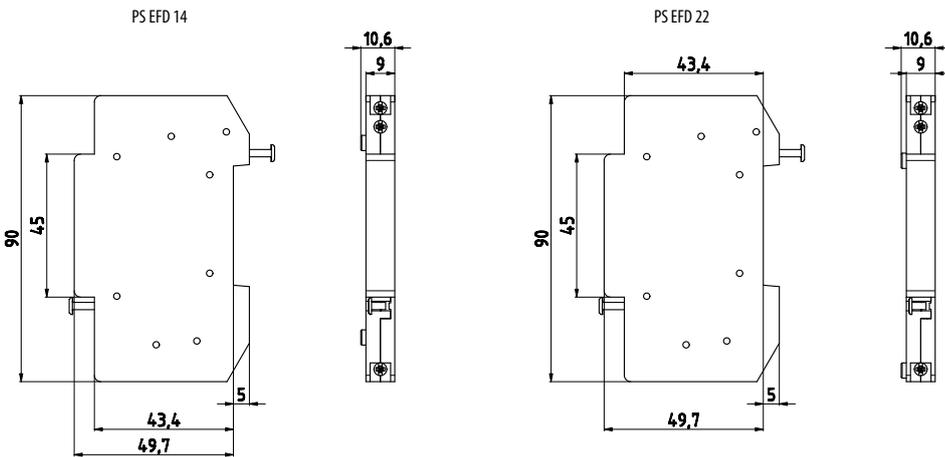

Connection kit

Description	Code No.	For use with	 g	
Connection kit 2p	002540948	EFD 8, EFD 10, EFH 10, PCF 8, PCF 10	96	1*/20
Connection kit 3p	002540949	EFD 8, EFD 10, PCF 8, PCF 10	162	1*/20
Connection kit 2p	002560948	EFH 14, EFH 14	144	1*/20
Connection kit 3p	002560949	EFH 14	217	1*/20
Connection kit 2p	002570948	EFD 22, EFD J30	191	1*/20
Connection kit 3p	002570949	EFD 22, EFD J30	300	1*/20

*Note: 1 kit suffices for the assembly of 50 sets



1500V Photovoltaic fuseholder EFH DC

✓ Versatility - the same type of combiner boxes for different systems



✓ LED indication with possibility of remote signalization



✓ Special design of the housing's outer part, providing distance for natural ventilation



✓ The same size of fuse-holders 10/14 up to 40A and 10/14 T up to 63A



✓ Safe replacement of the fuse-link without touching live parts



✓ Printing on the front side



✓ Ease of installation using IZ35 busbars



✓ Sealing possibilities



✓ Compliance with IEC 60947-1, IEC 60947-3, UL 4248-1, UL 4248-19

✓ Silver-plated contacts

✓ Complete protection against touch according to IP20

✓ Two-position snapper



✓ Regular version:
For 10x85 and 10/14x85 fuse-links
Up to 40A 1500V
Max. permissible power dissipation of fuse-link 8,5W



✓ T version:
1 1/4 standard module width
The most compact design on the market (35% less needed space in combiner box)



EFH 10/14x85 DC - Photovoltaic fuseholder

General characteristics



Rated voltage	1500V d.c.
Rated current	40, 63A
Utilization category	PV-0
Degree of protection	IP20
Standards	IEC 60947-1, IEC 60947-3, UL 4248-1, UL 4248-19

Technical data

	EFH 10/14x85	EFH 10/14x85 T
Fuse type	CH 10x85, CH 10/14x85	CH 10/14x85 T
Versions	Without indicator, LED indicator	
Rated operational voltage U _e	1500V d.c.	
Rated operational current I _e	40A	63A
Rated conditional short-circuit current	50kA	
Max. power dissipation of the fuse-link	8,5W	14,5W
LED indication operating range	80V - 1500V d.c.	
Utilization category	PV-0	
Operational performance (cycles with current)	Do not operate under load	
Operational performance (cycles without current)	2000	
Humidity	90% at 20°C	
Ambient air temperature	-5°C ... +40°C	
Operating ambient temperature	-40°C ... +90°C	
Store ambient temperature	-25°C ... +55°C	
Degree of protection (IEC 60529)	IP 20	
Terminal capacity	0,75-16mm ² AWG 18-6 solid&stranded Cu only	0,75-50mm ² AWG 18-2 solid&stranded Cu only
Screw	PZ M5	PZ M6
Torque	2 Nm 17,7 lb-in	2,5 Nm 22,2 lb-in
Mounting on EN 60715 rail	35mm rail	
Sealing possibility	ON and OFF	
Standards - fuse-links	IEC 60269-2, IEC 60269-6, IEC 60269-7 UL 248-1, UL 248-19	
Standards - fuse holders	IEC 60947-1, IEC 60947-3, UL 4248-1, UL 4248-19	
Test reports	UL	UL
Certificates	UL Listed	UL Listed

CH EFH 1500V d.c.

Type	I _{max} [A]	No. of poles	Code No.	Max. power dissipation of the fuse-link per pole [W]	Indicator	g	
EFH 10/14x85	40	1p	002580001	8,5	-	94	10/160
			002580011		LED	97	
EFH 10/14x85 T	63		002580006	14,5	-	125	
			002580016		LED	128	

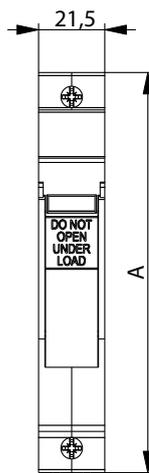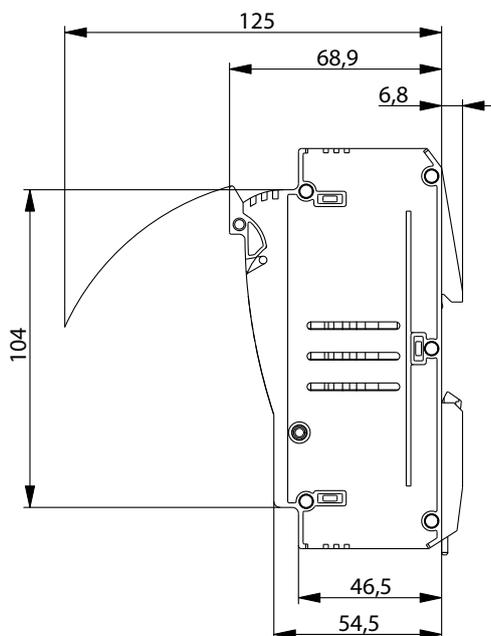

	A
EFH 10/14	131
EFH 10/14 T	135,6

Section rail

EFH 10 DC

Type	Description	Code No.	Cross section [mm ²]	Length [m]	g	Box
IZS10/1F/54	10 mm ² , 1 pole, 54 mod	002921101	10	1	150	40
IZS16/1F/54	16mm ² , 1 pole, 54 mod	002921111	16	1	220	40


For use with EFH10 DC, more info in B&I catalogue



EFH 14 DC

Type	Description	Code No.	Cross section [mm ²]	Length [m]	g	Box
IZS16/1F/36	16mm ² , 1 pole, 36 mod	002921121	16	1	280	40


For use with EFH14 DC, more info in B&I catalogue

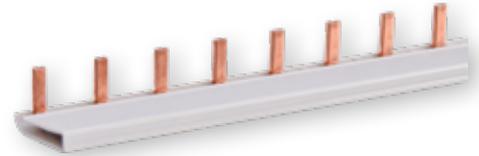

EFH 10/14x85 DC

Type	Description	Code No.	Cross section [mm ²]	Length [m]	g	Box
IZS35/1F/46	35mm ² , 1 pole, 46 mod, T=22mm, 1500 VDC, 125A	002921292	35	1,016	400	10


Use end cover Z-50/1F/28 (002921263), under 1 reference code = 1 pair
Feeding at beginning/ending rail = 125A, feeding in middle of rail = 200A

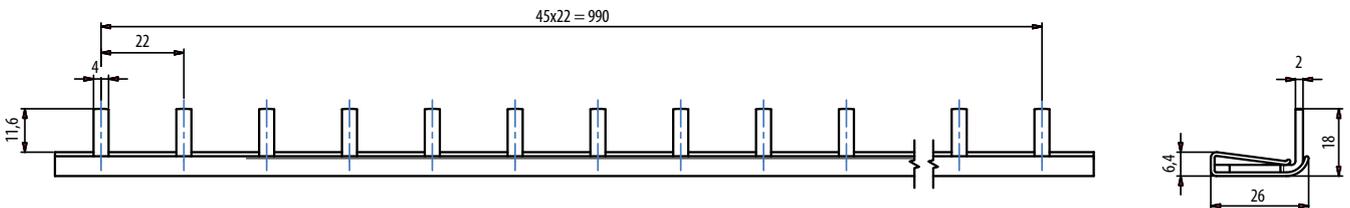

Clip contact for CH fuse-links

Clip contact for CH10 fuse-links




Code	Type	 g	
006710335	CH10-PCB	1	250

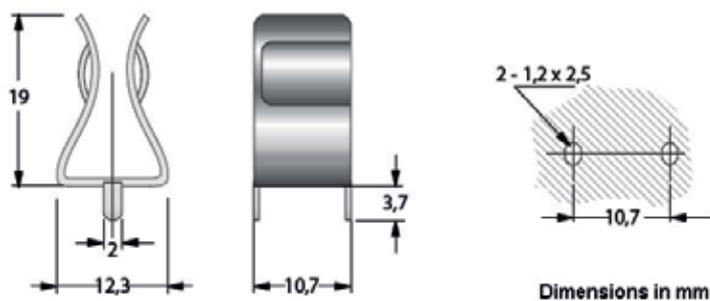

Type	Dimensions [mm]							
	A	B	C	D	E	F	G	H
CH10-PCB	12,3	9,8	19,0	2,0	2,0	0,75	11,0	4,0

Clip contact for CH14 fuse-links

Code	Type	 g	
006710340	CH14-PCB	5	100
006710341	CH14-SCR	5	100

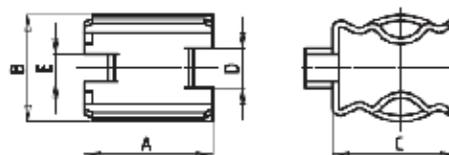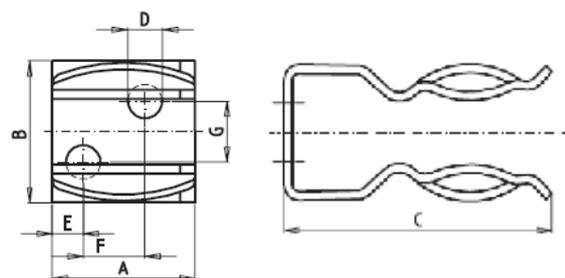

Type	Dimensions [mm]						
	A	B	C	D	E	F	G
CH14-SCR	16	16	23	4,2	6,5	0	0

Type	Dimensions [mm]							
	A	B	C	D	E	F	G	H
CH14-PCB	16	14	15,5	5	3,5	0,75	10,7	3,5

PROTECTION OF PV SYSTEMS




 etigroup
www.etigroup.eu

**NH Fuse-links with
gPV Characteristic**

ETI
SWITCH TO
A SAFE FUTURE

Photovoltaic Array Overcurrent Protection

NH gPV fuse selection

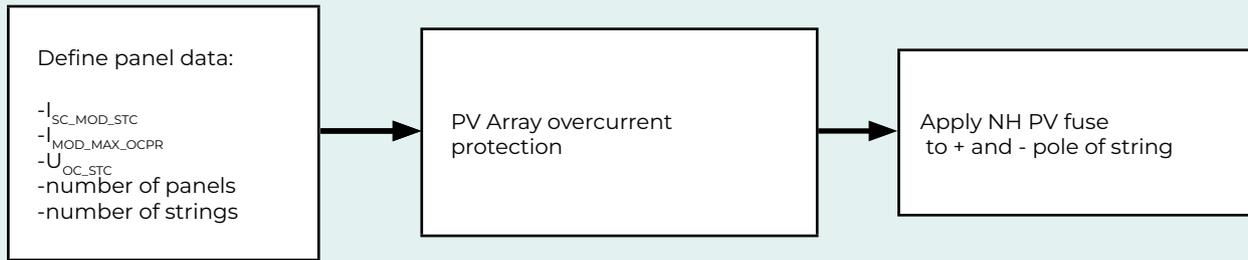

PV array overcurrent protection:

$$I_n > 1,25 \times I_{SC_ARRAY} \text{ - the short circuit current of the PV array at STC}$$

$$I_n \leq 2,4 \times I_{SC_ARRAY}$$

$$I_{SC_ARRAY} = I_{SC_MOD_STC} \times \text{No. of PV strings}$$

ETI as one of the most important European producer of overcurrent protection equipment and devices participating in many working groups for standards development at International Electrotechnical Commission (IEC). ETI is member of maintenance team MT9 belonging to the 32B group, working on the part 6 of the IEC 60269-7 dealing with supplementary requirements for fuse-links for the overcurrent protection of solar photovoltaic energy systems.

gPV fuse-link must be selected acc. standard IEC 62548

NH gPV 1000V - Fuse-links

General characteristics

Rated voltage	1000V d.c. (NH1, 2, 3: L/R=1ms; NH0, 1C: L/R=2ms)
Breaking capacity	30kA d.c. (NH1, 2, 3), 20kA d.c. (NH0, 1C)
Standards	IEC 60269-6
Application	Fuse-link for DC application. Applied in fuse base PK1, 2, 3 1000V d.c..




NH gPV 1000V d.c.


Size	I _n [A]	gPV Standard indicator	gPV S ₁₁₀ screw contact	gPV U ₁₁₀ screw contact	gPV G screw contact with centre trip indicator for microswitch MK	Power dissipation (0,7 x I _n) [W]	Power dissipation [W]	Pre-arcing Joule integral [I ² t] (L/R = 1ms)	Operating Joule integral [I ² t] (L/R = 1ms)	g	Box
		Code No. Pic.1	Code No. Pic.2	Code No. Pic.3	Code No. Pic.4						
0	32	004110381	-	-	-	-	7,6	52	430	280	3/45
	40	004110383	-	-	-	-	8,8	96	730		
	50	004110384	-	-	-	-	11,0	155	920		
	63	004110385	-	-	-	-	13,5	290	1.760		
	80	004110386	-	-	-	-	17,0	520	3.160		
	100	004110387	-	-	-	-	21,0	1.110	5.280		
	125	004110388	-	-	-	-	22	2.800	11.340		
1C	32	004110371	-	-	-	-	7,6	52	430	300	3/45
	40	004110373	-	-	-	-	8,8	96	730		
	50	004110374	-	-	-	-	11,0	155	920		
	63	004110375	-	-	-	-	13,5	290	1.760		
	80	004110376	-	-	-	-	17,0	520	3.160		
	100	004110377	-	-	-	-	21,0	1.110	5.280		
	125	004110378	-	-	-	-	22	2.800	11.340		
1	200	004110342	-	-	-	11	27	4.400	29.000	500	3/24
2	200	004110343	004110292	004110296	004110346	11	26	4.400	29.000	650	1/16 (G screw contact: 2/16)
	250	004110344	004110293	004110297	004110347	15	36	6.000	38.000		
3	160	004110456	-	-	-	15	38	5.000	10.000	1200	3/15 (G screw contact: 2/8)
	200	004110455	-	-	-	18	45	10.000	20.000		
	250	004110458	-	-	-	18	44	20.000	40.000		
	315	004110460	004110294	004110298	004110232	24	54	40.000	80.000		
	350	004110459	004110348	004110349	004110233	25	55	45.000	90.000		
	400	004110457	004110295	004110299	004110234	24	58	46.000	138.000		



Standard indicator

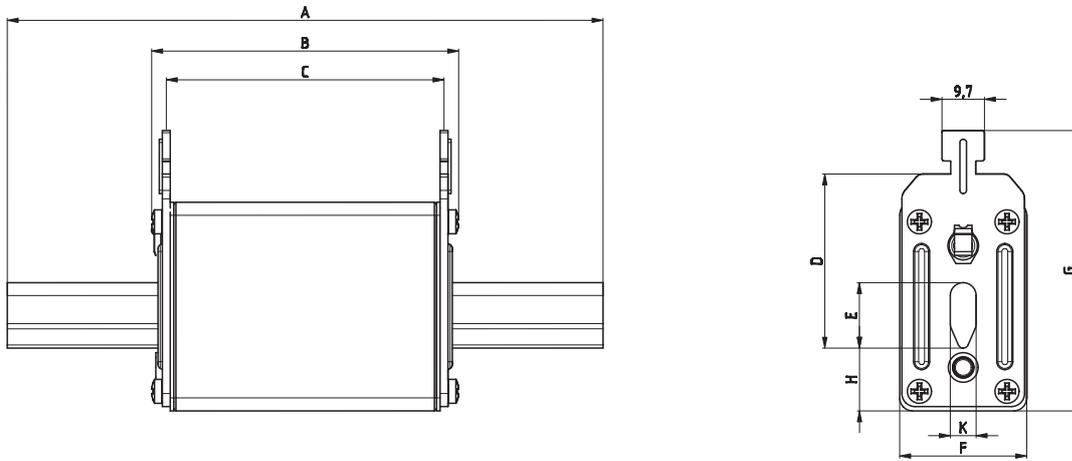


Size	A	B	C	D	E	F	G	H	K
0	125	72	66	35	15	30	60	15	6
1C	135	72	66	40	15	30	65	15	6

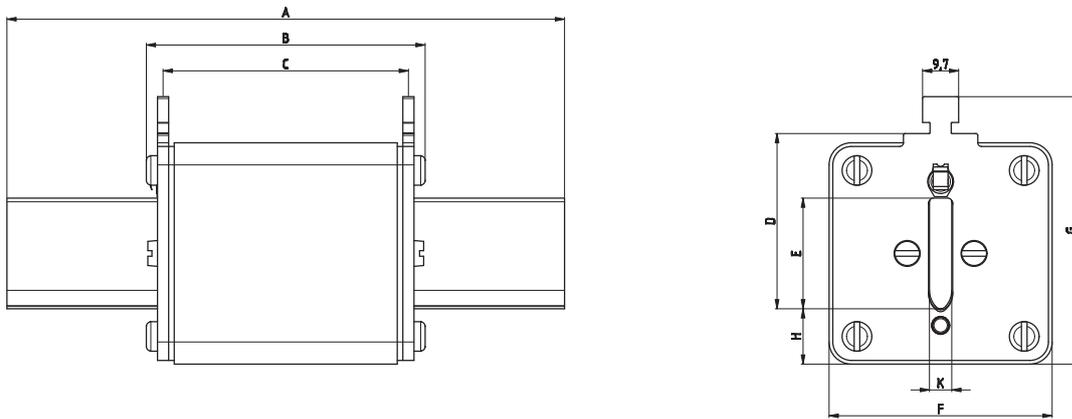


Size	A	B	C	D	E	F	G	H	K
1	135	74	70	42	24	51	67	13,5	6
2	150	74	70	48	30	61	71	15	6
3	150	74	70	60	37	73	87	18	6

S₁₁₀ screw contact

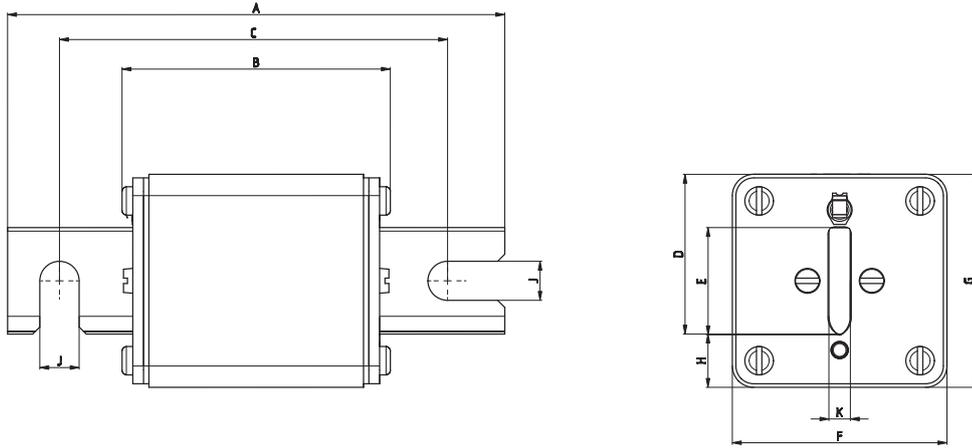


U₁₁₀ screw contact

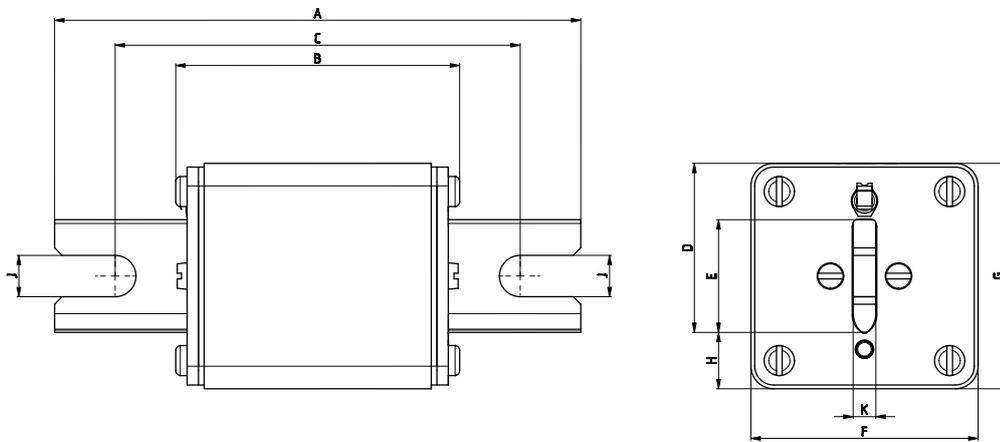

Size	A	B	C	D	E	F	G	H	K	J - NHS	J - NHU
2 S,U	140	73	110	45	30	60	60	15	6	11	13
3 S,U	140	73	110	55	37	73	73	18	6	11	13


G screw contact

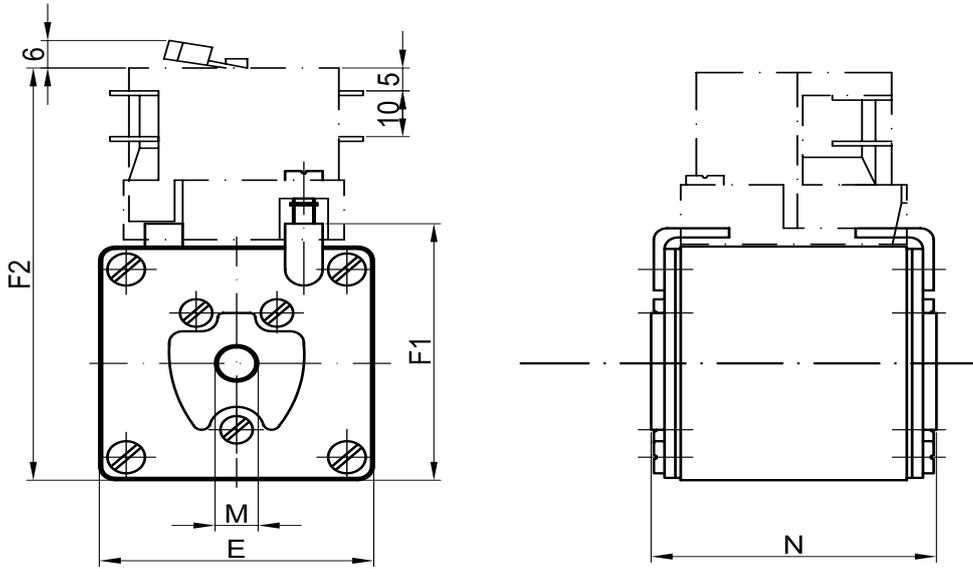


Size	D	E	F1	F2	M	N
2	60	60	65	99	M10	75
3	75	75	80	114	M12	75

Time current characteristics I/t


NH0, 1C, 1 gPV 1000V

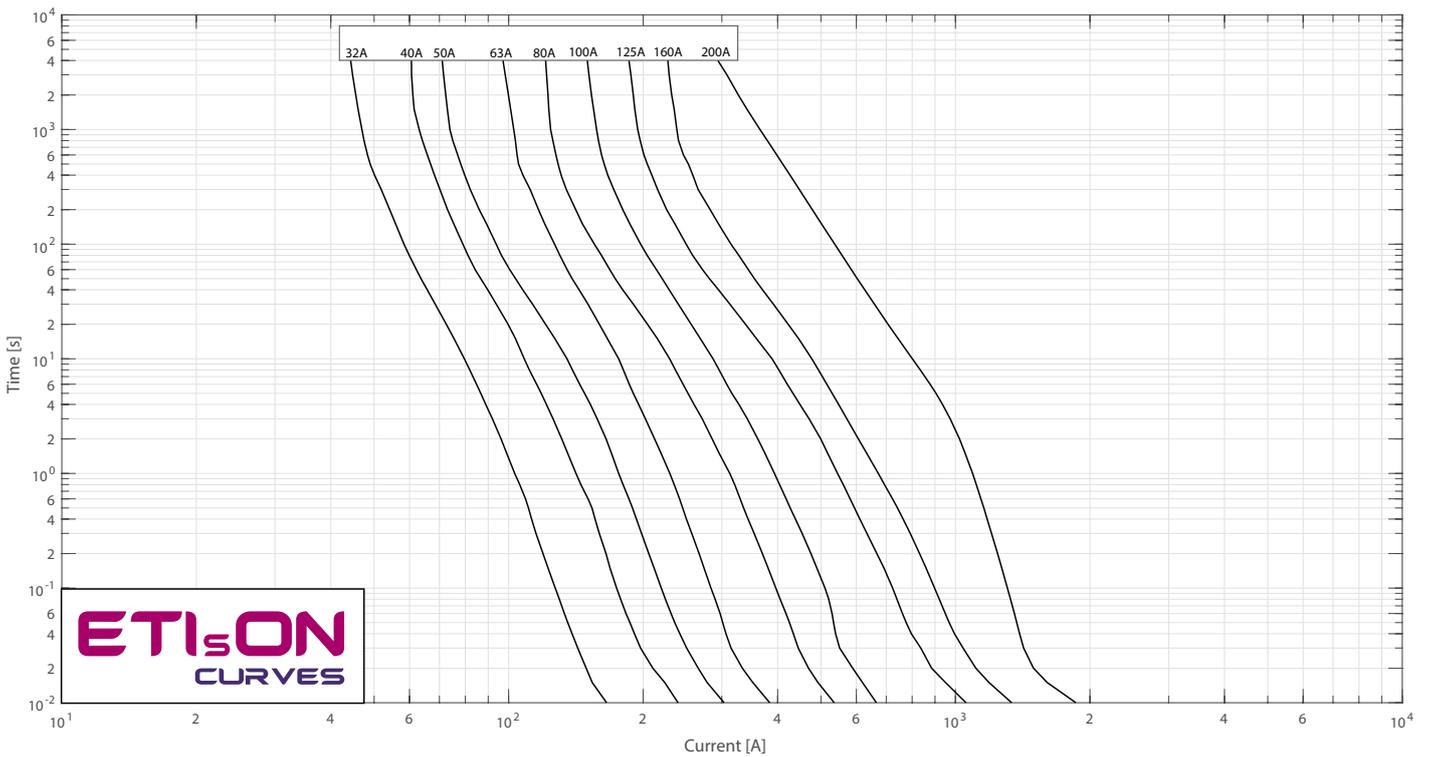

NH2 gPV 1000V

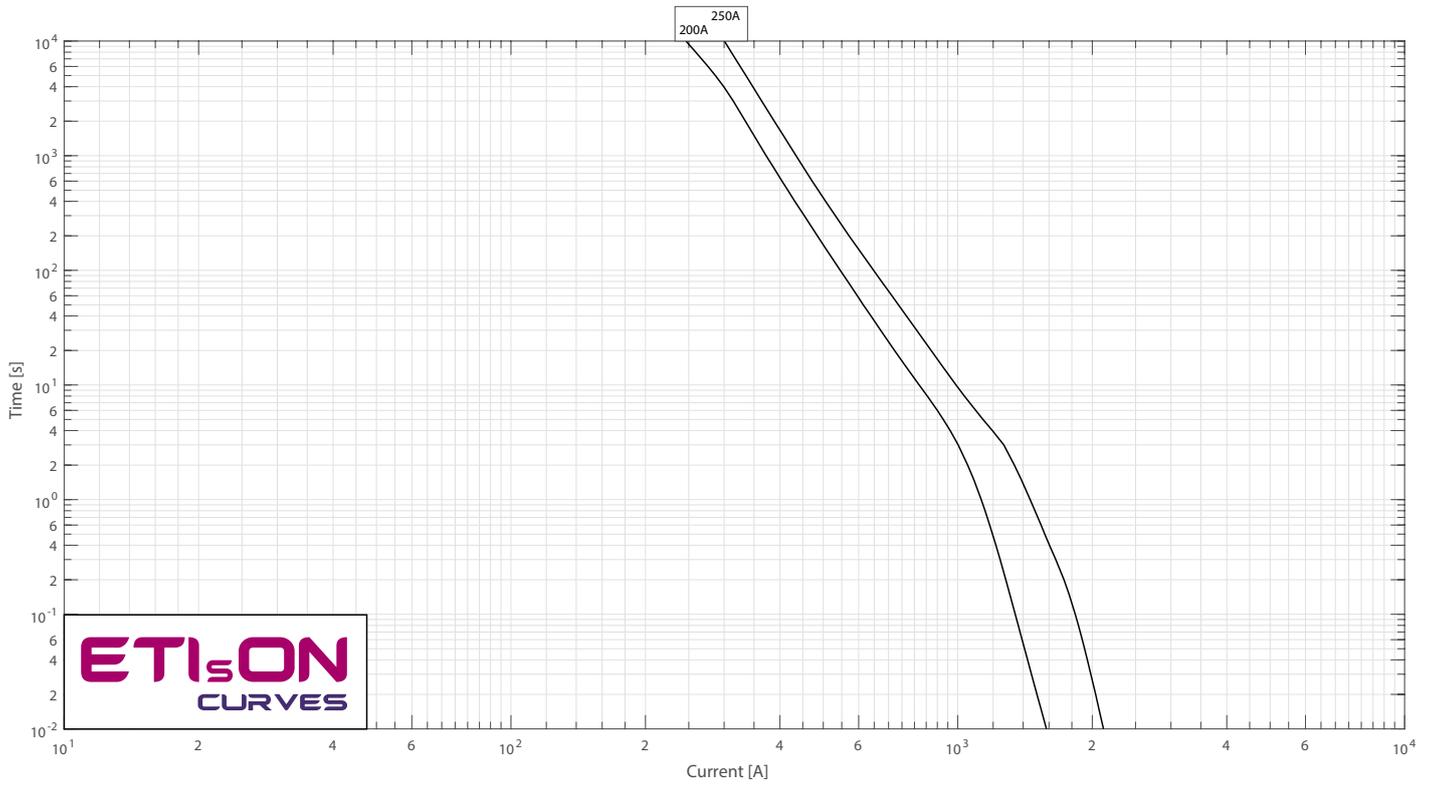

NH3 gPV 1000V

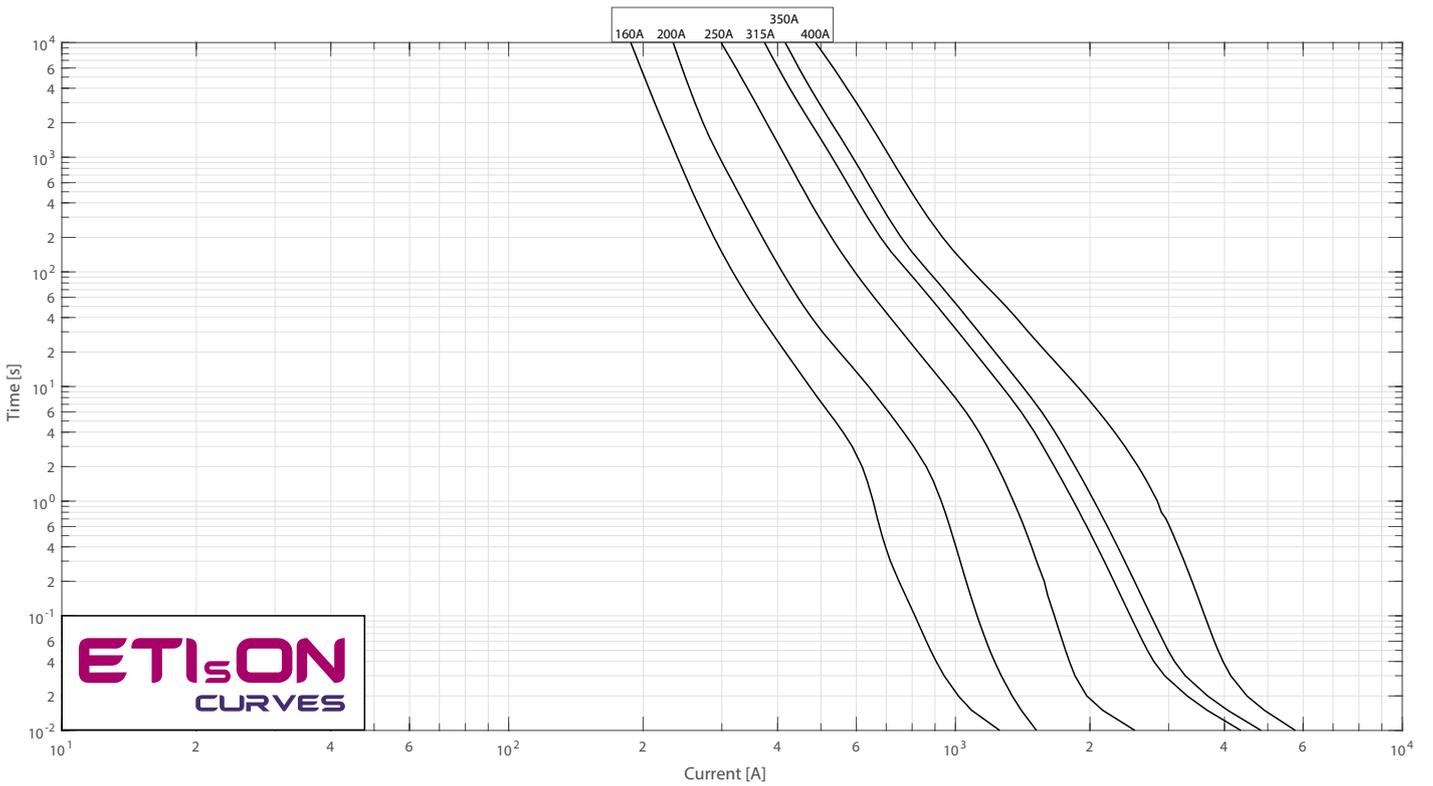

NH gPV 1100V - Fuse-links

General characteristics

UL file: E347771

Rated voltage	1100V d.c. (L/R = 2ms)
Breaking capacity	10 kA d.c. (NH 3L 630A: 30kA d.c.)
Standards	IEC 60269-6, UL 248-19
Application	Fuse-link for DC application. Applied in fuse base PK XL 1500V.



NH gPV 1100V d.c.

Size	I _n [A]	Standard indicator	gPV		Power dissipation (0,7xI _n) Pd [W]	Power dissipation [W]	Pre-arcing Joule integral [I ² t] (L/R = 2ms)	Operating Joule integral [I ² t] (L/R = 2ms)	g	Box
			S ₁₇₀ screw contact	U ₁₇₀ screw contact						
1XL	63	004110391	004110472	004110487	7	15,7	2.800	3.500	750	1/17
	80	004110392	004110473	004110488	7	16	4.500	5.500		
	100	004110393	004110474	004110489	8,3	19	7.500	9.000		
	125	004110394	004110475	004110490	9,7	22	13.000	15.000		
	160	004110395	004110476	004110491	13,2	30	25.000	30.000		
2XL	200	004110396	004110477	004110492	15	34,8	39.000	80.000	1050	1/15
	200	004110397	004110478	004110493	15,9	36	55.000	75.000		
	250	004110398	004110479	004110494	19,3	44	90.000	120.000		
3L	315	004110399	004110480	004110495	23	53,6	170.000	230.000	1360	1/10
	350	004110400	004110481	004110496	26	58	195.000	260.000		
	400	004110401	004110482	004110497	28	64,8	250.000	350.000		
	450	004110485	004110486	004110498	34	85	130.000	250.000		
	500*	004110629	004110628	004110627	37	98	150.000	370.000		
	630**	004110449	/	004110484	46	119	180.000	450.000	1970	1/10


*size 73x73; dimensions on page <?> (3L).

** 30kA, not UL certified






NH 1XL, 2XL, 3L

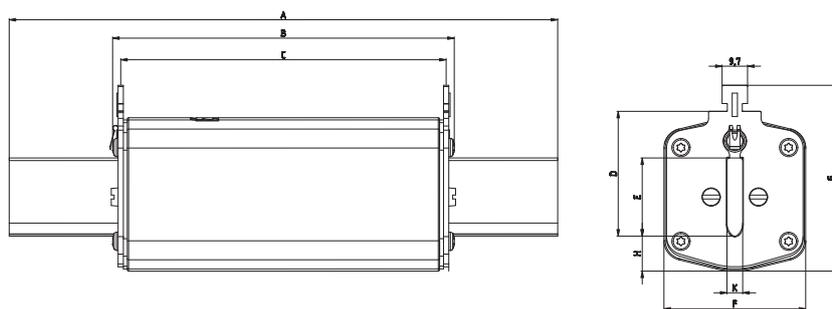


Size	Dimensions [mm]								
	A	B	C	D	E	F	G	H	K
1XL	194	129	124	40	24	46	62	12	6
2XL	209	129	124	48	30	54	71,5	13,5	6
3L	209	129	124	60	37	64	83,5	13,5	6

NHS 1XL, 2XL, 3L

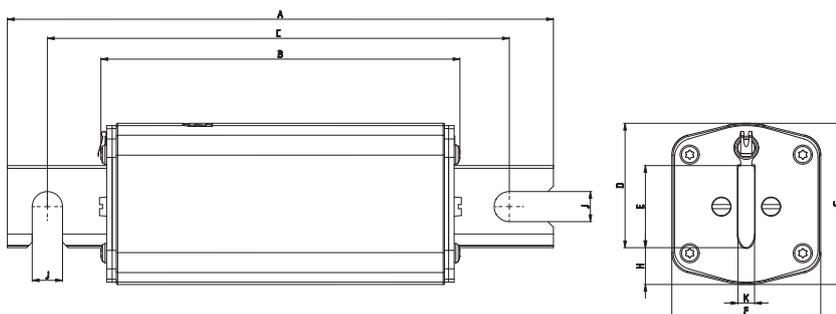


NHU 1XL, 2XL, 3L

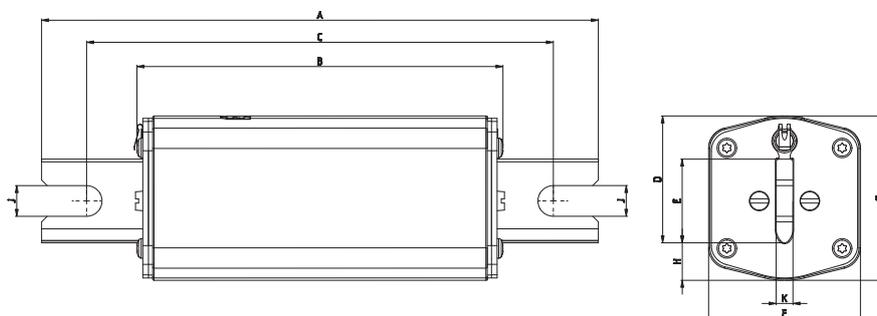


Size	Dimensions [mm]										
	A	B	C	D	E	F	G	H	K	J-NHS	J-NHU
1XL S,U	197	170	124	40	24	46	50	12	6	11	11
2XL S,U	200	170	124	48	30	54	59	13,5	6	11	13
3L S,U	200	170	124	60	37	64	70	13,5	6	11	13

Time current characteristics I/t

NH1XL

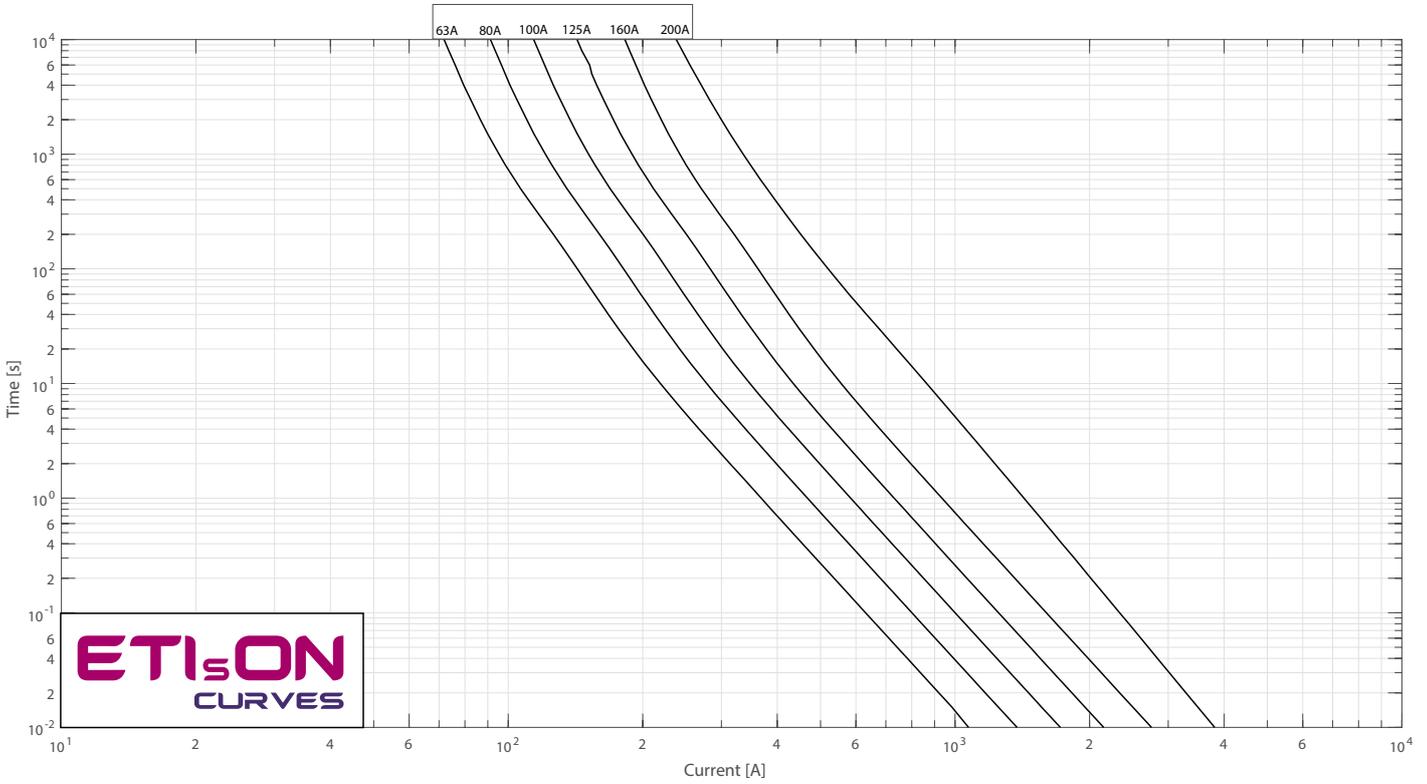

NH2XL, NH3L

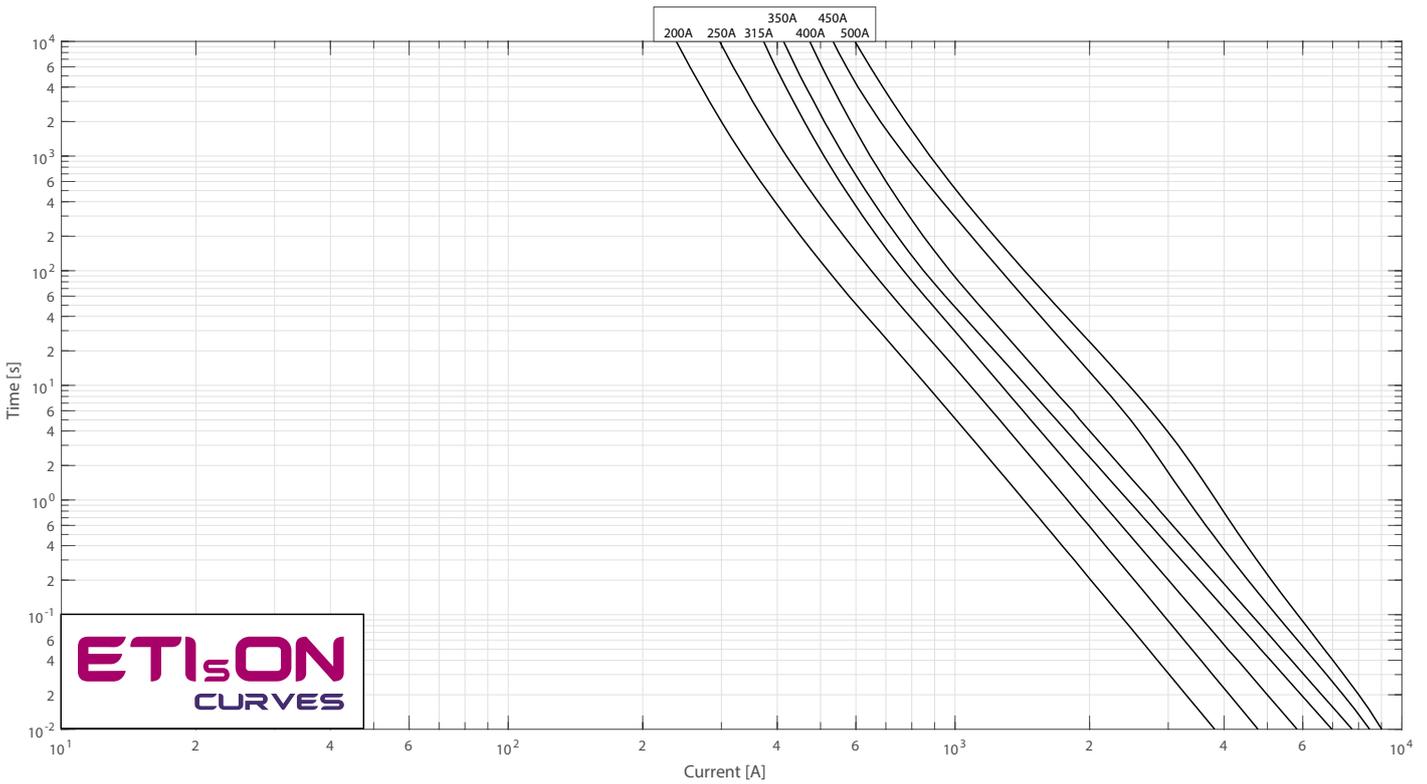

NH 01XL gPV 1500V - Fuse-links



General characteristics


Rated voltage	1500V d.c. (L/R=3ms)
Breaking capacity	30kA d.c.
Standards	IEC 60269-6, UL248-19
Application	Fuse-link for DC application. Applied in fuse base PK1XL.




NH gPV 1500V d.c.

Size	I_n [A]	gPV Standard indicator	gPV S_{150} screw contact	gPV U_{150} screw contact	Power dissipation (0,7xI _n) Pd [W]	Power dissipation [W]	Pre-arcing Joule integral [I ² t] (L/R = 3ms)	Operating Joule integral [I ² t] (L/R = 3ms)		
01XL	50	004110692	004110743	004110749	7	18	500	3.000	450	3/30
	63	004110693	004110744	004110750	8,5	22	1.000	6.000		
	80	004110694	004110745	004110751	9	21	2.000	15.000		
	100	004110695	004110746	004110752	11	29	3.500	25.000		
	125	004110696	004110747	004110753	13	36	4.000	30.000		
	160	004110697	004110748	004110754	17	46	6.000	48.000		

Time current characteristics I/t


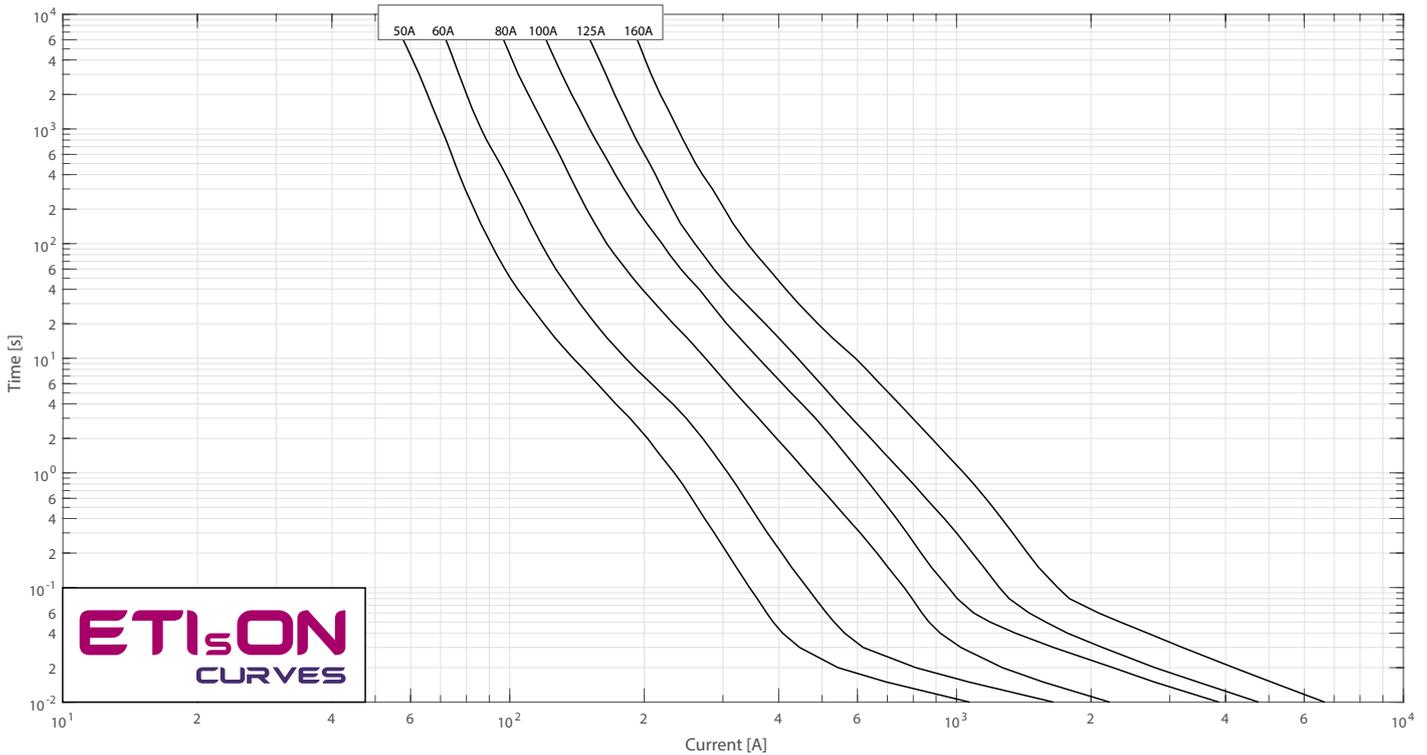


NH 01XL

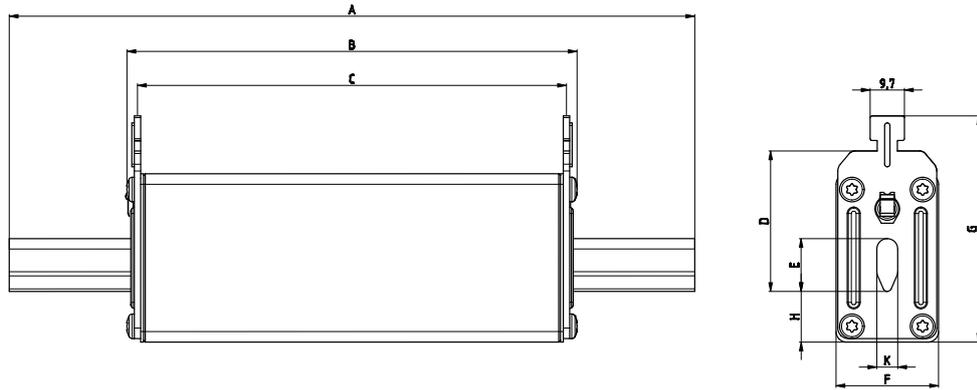


	A	B	C	D	E	F	G	H	K
01XL	194	128	123,2	40	15	29	65	15	6

NHS 01XL

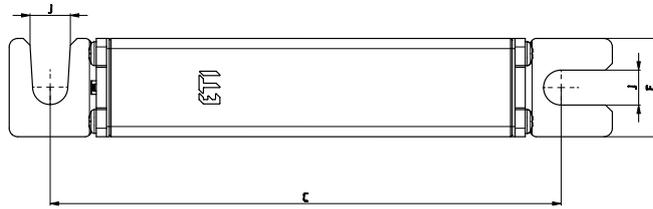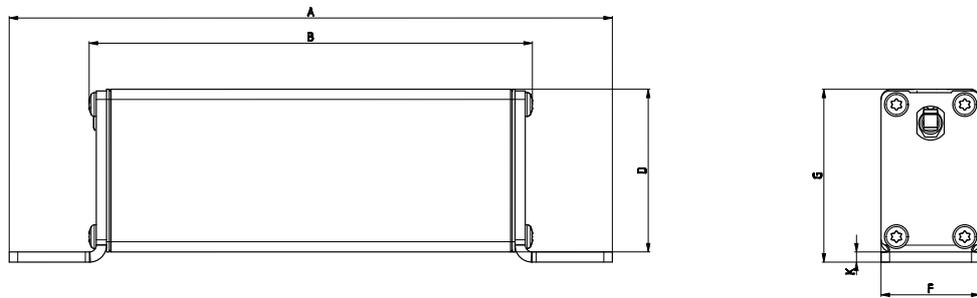

NHU 01XL

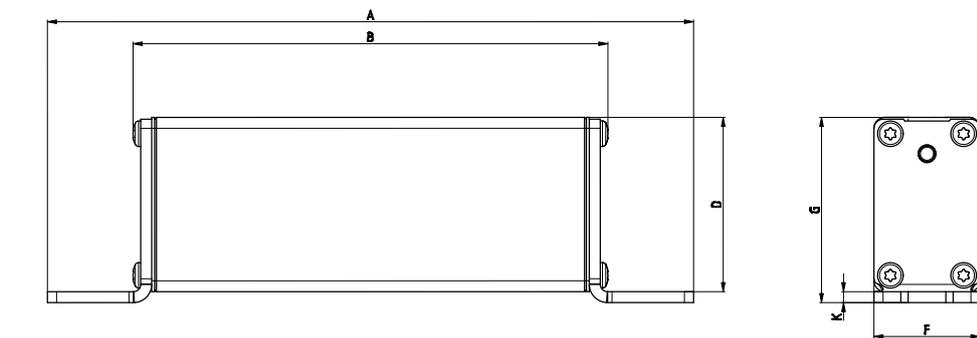

	A	B	C	F	G	K	J
01XL S,U	177	130	150	29	51	3	10

NH gPV 1500V - Fuse-links



General characteristics

UL file E347771

Rated voltage	1500V d.c. (L/R=3ms)
Breaking capacity	30kA d.c. NH1,2XL; 50kA d.c. NH3L
Standards	IEC 60269-6, UL 248-19
Application	Fuse-link for PV applications. Applied in fuse base PK XL 1500V.



NH gPV 1500V d.c.

Size	I_n [A]	Standard indicator	gPV		Power dissipation (0,7xI _n) Pd [W]	Power dissipation [W]	Pre-arcing Joule integral [I²t] (L/R = 3ms)	Operating Joule integral [I²t] (L/R = 3ms)		
			S ₁₇₀ screw contact	U ₁₇₀ screw contact						
1XL	50	004110621*	004110622	004110623	6	14	800	3500	950	1/15
	63	004110560*	004110591	004110606	6,2	14	1.500	6.000		
	80	004110561*	004110592	004110607	7	16	5.000	15.000		
	100	004110562*	004110593	004110608	8,3	19	10.000	26.000		
	125	004110563*	004110594	004110609	9,7	22	15.000	37.000		
	160	004110564*	004110595	004110610	13,2	30	19.000	48.000		
	200	004110565*	004110596	004110611	13,7	32,5	22.000	75.000		
2XL	200	004110566*	004110597	004110612	15,9	36	42.000	75.000	1350	1/9
	250	004110567*	004110598	004110613	19,3	44	73.000	132.000		
	315	004110630*	004110635	004110640	22,2	57	65.000	300.000		
	350	004110631*	004110636	004110641	23,7	61	75.000	350.000		
	400	004110632*	004110637	004110642	26,8	67	85.000	450.000		
3L	450	004110633*	004110638	004110643	29	75	130.000	600.000	1970	1/9
	500	004110634*	004110639	004110644	44,3	79	160.000	700.000		
	630	004110647*	004110648	004110649	40	102	280.000	1.600.000		



* possible to mount microswitch NV55





General characteristics

UL file E347771


Rated voltage	1500V d.c. (L/R=3ms)
Breaking capacity	50kA d.c.
Standards	IEC 60269-6, UL 248-19
Application	Fuse-link for PV applications. Applied in fuse base PK XL 1500V.



NH gPV 1500V d.c.

Size	I _n [A]	gPV		Power dissipation (0,7xI _n ²) Pd [W]	Power dissipation [W]	Pre-arcing Joule integral [I ² t] (L/R = 3ms)	Operating Joule integral [I ² t] (L/R = 3ms)	g	Box
		S ₁₇₀ screw contact (pic.4)	U ₁₇₀ screw contact (pic.5)						
3L MS	315	004110729	004110734	22,2	57	65.000	300.000	1970	1/9
	350	004110730	004110735	23,7	61	75.000	350.000		
	400	004110731	004110736	26,8	67	85.000	450.000		
	450	004110732	004110737	29	75	130.000	600.000		
	500	004110733	004110738	44,3	79	160.000	700.000		

It is possible to mount microswitch NV55 to all fuse-links in the above table.



General characteristics

Rated voltage	1500V d.c. (L/R=3ms)
Breaking capacity	70kA d.c. (IEC 60947-3: test sequence IV) / 50kA d.c. (IEC 60269-6), UL 248-19
Standards	IEC 60269-6, IEC 60947-3: test sequence IV, UL 248-19
Application	Fuse-link for PV applications. Applied in fuse base PK XL 1500V.




NH gPV 1500V d.c.

Size	I _n [A]	Standard indicator	gPV		Power dissipation (0,7xI _n) Pd [W]	Power dissipation [W]	Pre-arcing Joule integral [I ² t] (L/R = 3ms)	Operating Joule integral [I ² t] (L/R = 3ms)	g	1/9
			S ₁₇₀ screw contact	U ₁₇₀ screw contact						
3L	315	004110714*	004110719	004110724	22,2	57	65.000	300.000	1970	1/9
	350	004110715*	004110720	004110725	23,7	61	75.000	350.000		
	400	004110716*	004110721	004110726	26,8	67	85.000	450.000		
	450	004110717*	004110722	004110727	29	75	130.000	600.000		
	500	004110718*	004110723	004110728	44,3	79	160.000	700.000		

* possible to mount microswitch NV55




NH 1XL, 2XL, 3L

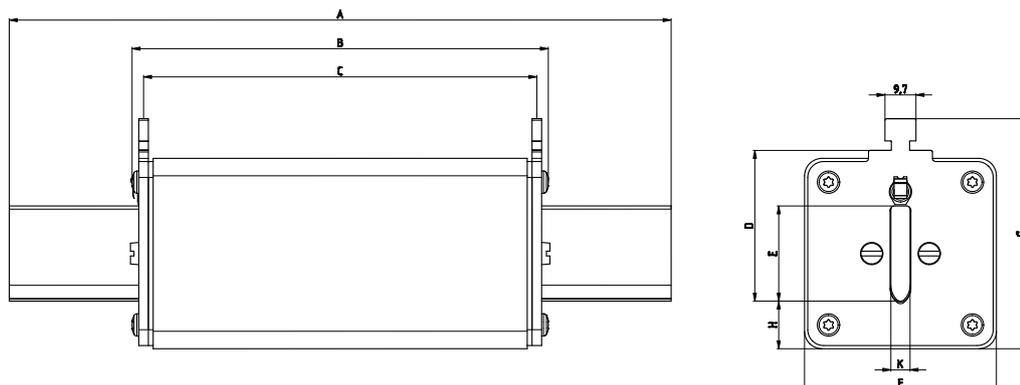


	A	B	C	D	E	F	G	H	K
1XL	192	131	125	42	24	51	67	13,5	6
2XL	208	130	126	48	30	61	71	15	6
3L	208	130	126	60	37	73	87	18	6

NHS 1XL, 2XL, 3L

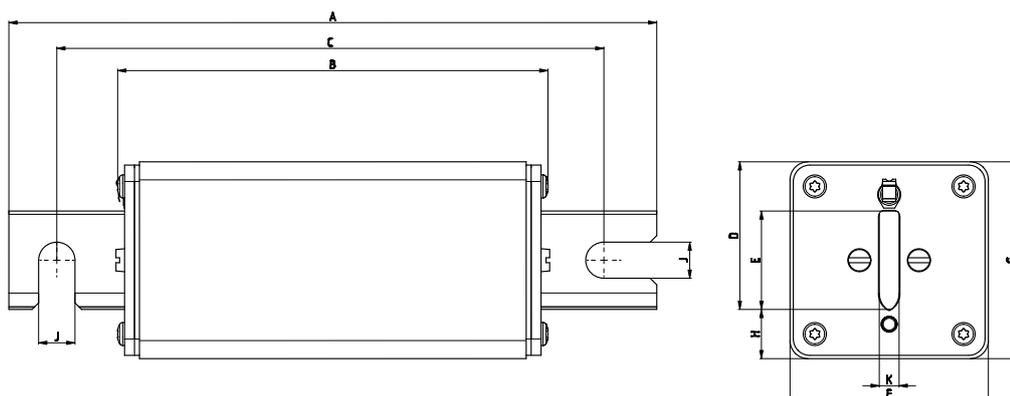


NHU 1XL, 2XL, 3L

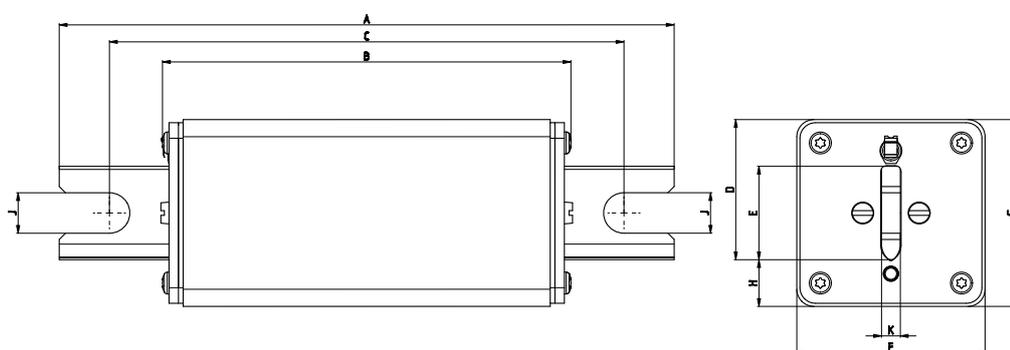


	A	B	C	D	E	F	G	H	K	J-NHS	J-NHU
1XL S,U	200	130	170	40	30	51	51	13,5	6	11	11
2XL S,U	200	130	170	45	30	61	61	15	6	11	13
3L S,U	200	130	170	55	37	73	73	18	6	11	13

Time current characteristics I/t

NH 1XL

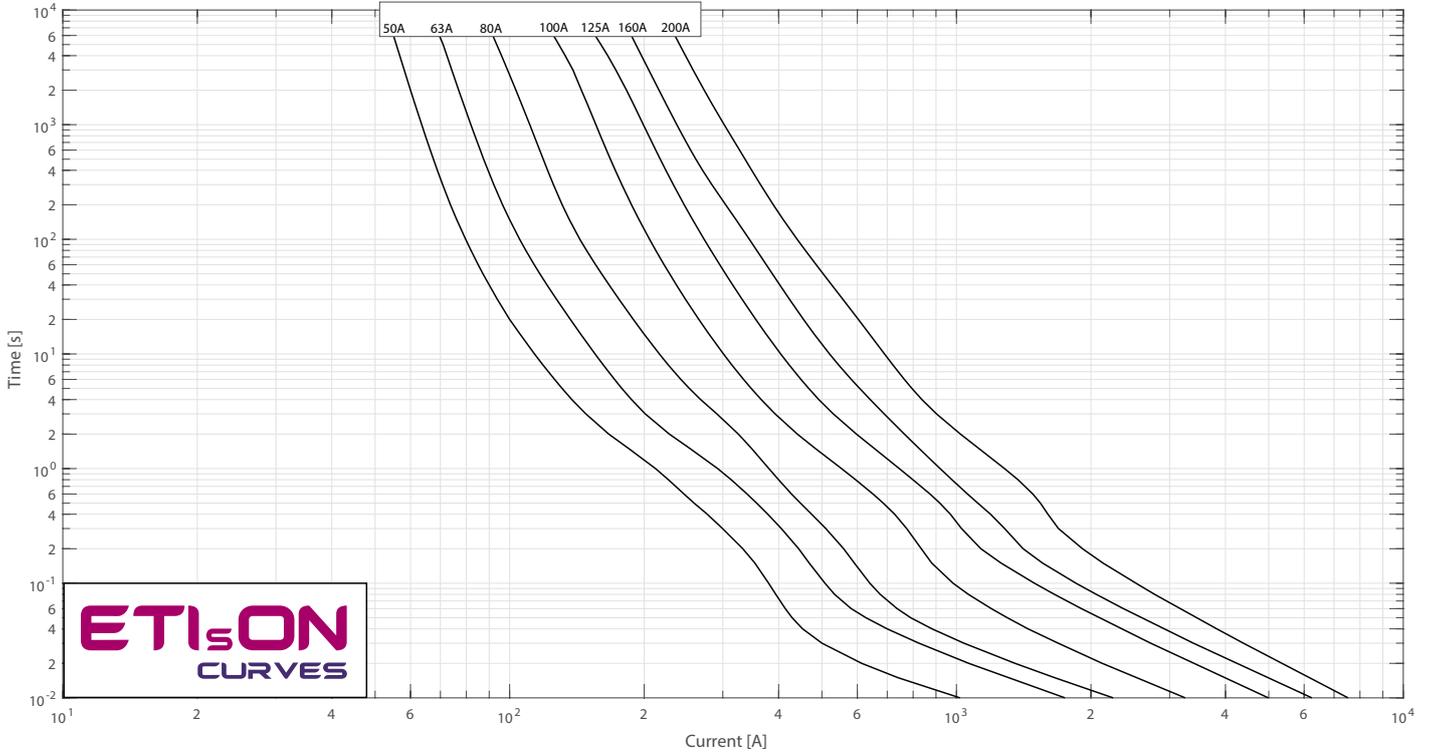

NH 2XL & NH 3L

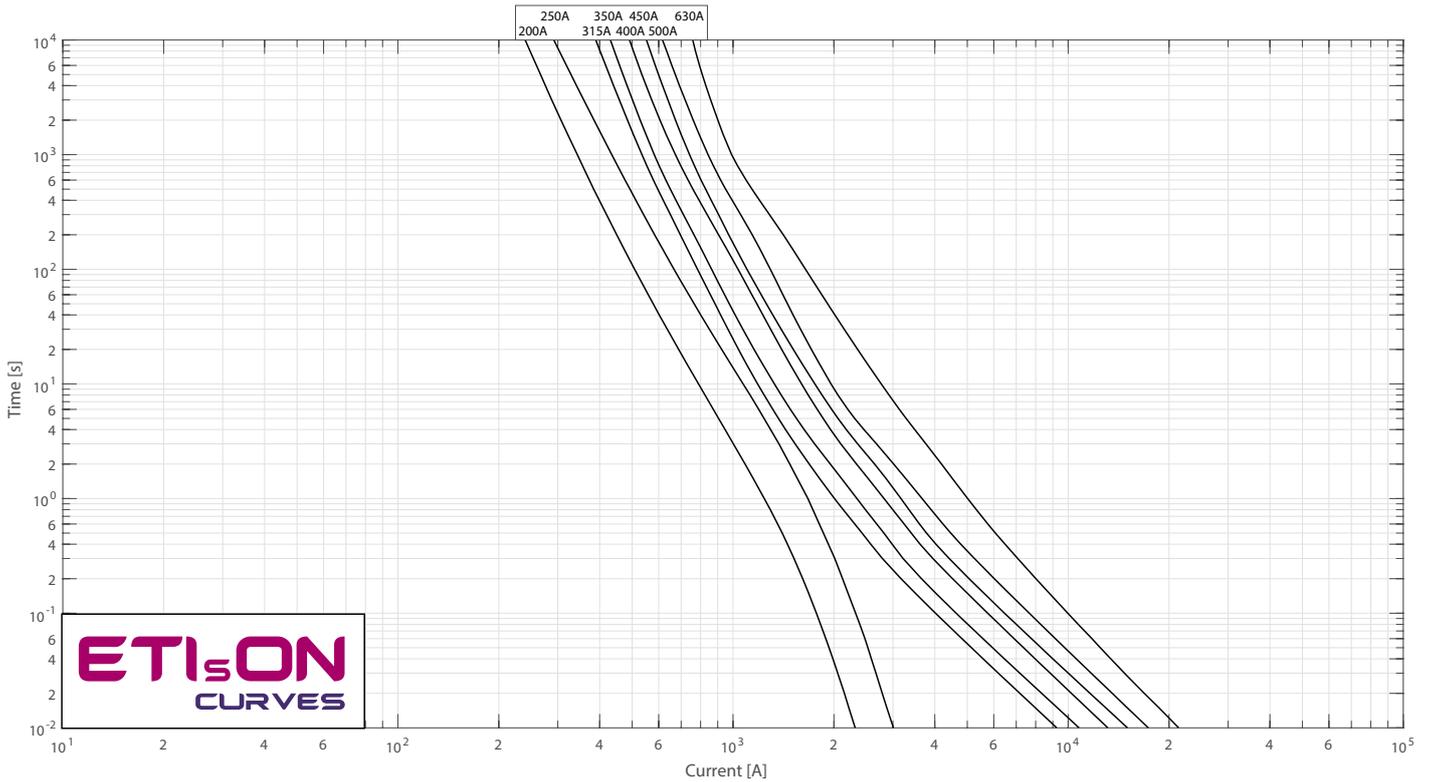


315 A							
cut-off	L/R						
Ip/kA	0,1 ms	0,5 ms	1 ms	1,5 ms	2 ms	2,5 ms	3 ms
10	10 kA	9 kA	9 kA	8 kA	8 kA	8 kA	8 kA
20	17 kA	13 kA	12 kA	11 kA	11 kA	10 kA	10 kA
30	22 kA	16 kA	14 kA	13 kA	12 kA	12 kA	12 kA
40	25 kA	19 kA	16 kA	14 kA	14 kA	13 kA	13 kA
50	28 kA	20 kA	17 kA	16 kA	15 kA	14 kA	14 kA
60	30 kA	21 kA	18 kA	17 kA	16 kA	16 kA	15 kA
70	33 kA	22 kA	19 kA	18 kA	17 kA	17 kA	16 kA
80	36 kA	26 kA	23 kA	20 kA	19 kA	19 kA	18 kA
90	38 kA	28 kA	24 kA	22 kA	20 kA	20 kA	19 kA
100	41 kA	30 kA	25 kA	23 kA	21 kA	21 kA	20 kA

350 A							
cut-off	L/R						
Ip/kA	0,1 ms	0,5 ms	1 ms	1,5 ms	2 ms	2,5 ms	3 ms
10	10 kA	10 kA	9 kA	9 kA	9 kA	8 kA	8 kA
20	18 kA	14 kA	13 kA	12 kA	12 kA	11 kA	11 kA
30	23 kA	17 kA	15 kA	14 kA	13 kA	13 kA	12 kA
40	27 kA	19 kA	17 kA	16 kA	15 kA	14 kA	14 kA
50	31 kA	21 kA	18 kA	17 kA	16 kA	16 kA	15 kA
60	32 kA	24 kA	19 kA	18 kA	17 kA	17 kA	16 kA
70	34 kA	25 kA	21 kA	20 kA	19 kA	18 kA	17 kA
80	38 kA	27 kA	24 kA	23 kA	21 kA	20 kA	20 kA
90	40 kA	30 kA	26 kA	24 kA	22 kA	21 kA	21 kA
100	43 kA	32 kA	27 kA	25 kA	23 kA	22 kA	22 kA

400 A							
cut-off	L/R						
Ip/kA	0,1 ms	0,5 ms	1 ms	1,5 ms	2 ms	2,5 ms	3 ms
10	10 kA	10 kA	10 kA	10 kA	9 kA	9 kA	9 kA
20	19 kA	16 kA	14 kA	13 kA	13 kA	12 kA	12 kA
30	24 kA	19 kA	17 kA	16 kA	15 kA	14 kA	14 kA
40	29 kA	21 kA	19 kA	18 kA	16 kA	16 kA	15 kA
50	33 kA	23 kA	21 kA	19 kA	18 kA	17 kA	16 kA
60	36 kA	25 kA	22 kA	20 kA	19 kA	19 kA	18 kA
70	38 kA	28 kA	23 kA	21 kA	20 kA	20 kA	19 kA
80	41 kA	30 kA	26 kA	25 kA	24 kA	23 kA	22 kA
90	45 kA	33 kA	29 kA	27 kA	25 kA	24 kA	23 kA
100	48 kA	35 kA	30 kA	28 kA	26 kA	25 kA	24 kA

450 A							
cut-off	L/R						
Ip/kA	0,1 ms	0,5 ms	1 ms	1,5 ms	2 ms	2,5 ms	3 ms
10	10 kA	10 kA	10 kA	10 kA	9 kA	9 kA	9 kA
20	20 kA	17 kA	16 kA	15 kA	14 kA	13 kA	13 kA
30	26 kA	21 kA	19 kA	18 kA	17 kA	16 kA	15 kA
40	32 kA	24 kA	21 kA	20 kA	18 kA	18 kA	17 kA
50	36 kA	27 kA	24 kA	22 kA	20 kA	19 kA	18 kA
60	41 kA	29 kA	25 kA	23 kA	22 kA	21 kA	19 kA
70	44 kA	32 kA	27 kA	25 kA	23 kA	22 kA	22 kA
80	48 kA	35 kA	30 kA	29 kA	27 kA	26 kA	25 kA
90	52 kA	37 kA	33 kA	30 kA	28 kA	27 kA	26 kA
100	55 kA	40 kA	35 kA	31 kA	29 kA	28 kA	27 kA

500 A							
cut-off	L/R						
Ip/kA	0,1 ms	0,5 ms	1 ms	1,5 ms	2 ms	2,5 ms	3 ms
10	10 kA	10 kA	10 kA	10 kA	9 kA	9 kA	9 kA
20	20 kA	17 kA	16 kA	15 kA	14 kA	14 kA	13 kA
30	28 kA	23 kA	20 kA	18 kA	17 kA	17 kA	16 kA
40	35 kA	27 kA	23 kA	21 kA	20 kA	19 kA	18 kA
50	40 kA	30 kA	26 kA	24 kA	22 kA	21 kA	20 kA
60	47 kA	33 kA	28 kA	26 kA	24 kA	23 kA	21 kA
70	50 kA	35 kA	30 kA	28 kA	26 kA	24 kA	23 kA
80	55 kA	39 kA	34 kA	31 kA	30 kA	28 kA	27 kA
90	59 kA	41 kA	36 kA	33 kA	32 kA	31 kA	29 kA
100	61 kA	44 kA	39 kA	35 kA	33 kA	32 kA	30 kA

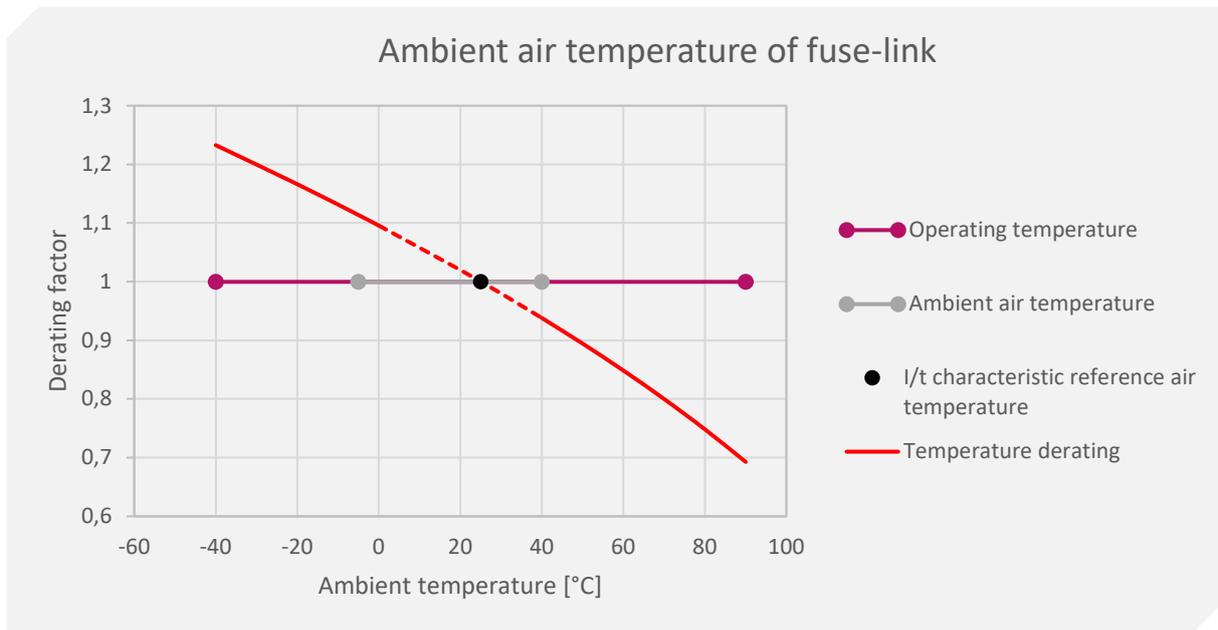

Legend:

T_{amb} – Ambient Temperature

TDF – Temperature Derating Factor

I_N – Nominal Current of Fuse-link

I_{TDF} – Nominal Current Including Temperature Derating Factor

Current calculation: $I_{TDF} = I_N \times TDF$

PROTECTION OF PV INVERTERS



 etigroup
www.etigroup.eu

**Fuses for cable
protection on a.c.
side of PV inverters**

ETI
SWITCH TO
A SAFE FUTURE

New directions in PV inverters' development

New Directions in PV Inverters Development...

PV inverters are becoming larger and smarter. Their characteristics are continuously improving, making them smart, safe, reliable, and efficient.

Higher yields are achieved by utilizing dynamic system efficiency optimization with intelligent technology. The achieved efficiency currently exceeds 98.5%. One of the most important technical features of the new generation of PV inverters is the 800V a.c. output voltage, an increase from the standard 400V a.c. This increase in output voltage results in a 75% decrease in a.c. connection wire losses. However, due to the increased output voltage, modern PV central inverters require specially designed fuse-links for reliable short-circuit and over-current protection.

... And New Fuse-Links to Meet the Increased Demands of Their Output Protection

ETI is one of the first among the producers of NH fuse-links to have developed a new generation of NH gG fuse-links, specifically designed for cable protection in 800V a.c. systems. Featuring an innovative design of melting elements and the adoption of high-temperature and internal pressure-resistant ceramic material, these NH fuse-links' constructions can now be incorporated into standard NH size dimensions.

Currently, ETI offers NH00, NH1, NH2, NH3C, and NH3 gG fuse-links, with rated currents ranging from 6A to 400A, designed and tested for 800V a.c. systems. These fuse-links have very low dissipation and high breaking capacity. Upon customer request, we are also prepared to develop fuse-links for even higher rated currents.

Features and Benefits

- // Load switching capacity up to 800V a.c.
- // Compliance with IEC photovoltaic standards
- // In standard NH size dimensions
- // Extremely low power dissipation
- // High breaking capacity
- // Designed to protect against a full range of overcurrents
- // High temperature and internal pressure-resistant ceramic material
- // Innovative design of melting elements

Applications

For cable protection on the a.c. side of 1500V PV inverters



NH gG 800V a.c. Fuse-links

General characteristics

Rated voltage	800V a.c.
Rated current	6A - 400A
Breaking capacity	120kA
Characteristic	gG
Standards	IEC 60269-2
Application	For cable protection on a.c. side of PV inverter

NV/NH gG 800V a.c.

Size	Breaking capacity [kA]	I_n [A]	Standard indicator	Pre-arcing Joule integral [A ² s]	Operating Joule integral [A ² s]	Power dissipation [0,7 x I _n] Pd [W]	Power dissipation [W]		
NH00	120	6	004184512	63	650	0,8	1,9	170	3/90
		10	004184513	35	850	0,6	1,3		
		16	004184514	120	1.800	1,1	2,4		
		20	004184515	225	4.000	1,1	2,6		
		25	004184516	300	6.500	1,2	2,7		
		35	004184518	1.800	10.000	1,5	3,3		
		40	004184519	2.100	13.500	1,8	4,0		
		50	004184520	4.300	27.000	2,1	4,8		
NH1	120	63	004184521	7.000	43.000	2,6	6,0	420	3/24
		25	004184482	600	14.000	1,4	3,2		
		35	004184483	2.400	35.000	1,5	3,4		
		40	004184484	3.200	50.000	1,8	4,0		
		50	004184485	3.500	70.000	1,9	4,4		
		63	004184486	5.500	120.000	2,4	5,5		
		80	004184487	11.000	145.000	3,0	6,9		
		100	004184488	18.000	185.000	3,8	8,6		
NH2	120	125	004184489	27.000	260.000	4,3	9,7	580	3/15
		160	004184490	45.000	475.000	5,5	12,4		
		200	004184463	55.000	410.000	8,3	18,5		
		80	004184531	11.000	145.000	3,1	6,9		
		100	004184532	18.000	185.000	3,9	8,6		
NH3C	120	125	004184533	27.000	260.000	4,4	9,7	585	3/12
		160	004184534	45.000	450.000	5,6	12,4		
		200	004184535	65.000	400.000	8,6	19,0		
NH3	120	80	004184536	130.000	650.000	10,4	23,0	800	3/12
		160	004184524	28.000	400.000	6,3	14,4		
		200	004184525	70.000	690.000	6,4	14,5		
		250	004184526	110.000	1.100.000	9,7	22,0		
		280	004184548	140.000	1.100.000	9,7	21		
		315	004184549	170.000	1.300.000	11,4	25		
		355	004184528*	280.000	1.700.000	12,5	27,5		
400	004184529*	350.000	2.100.000	14,7	32,5	1300	3/15		

* Top visual indicator

Recommended Accessories


- /// Ceramic fuse bases
- /// Plastic fuse bases
- /// Fuse disconnectors




Size	Dimensions [mm]								
	A	B	C	D	E	F	G	H	K
00	79	53	47	35	15	28	56	12	6
1	135	72	65	40	20	46	65	14	6
2	150	72	65	48	26	54	73	14	6
3C	150	72	65	60	26	54	84	14	6
3	150	72	65	60	33	65	84	14	6
3*	150	74	70	60	37	73	87	13	6

*Top visual indicator



NH00 KOMBI

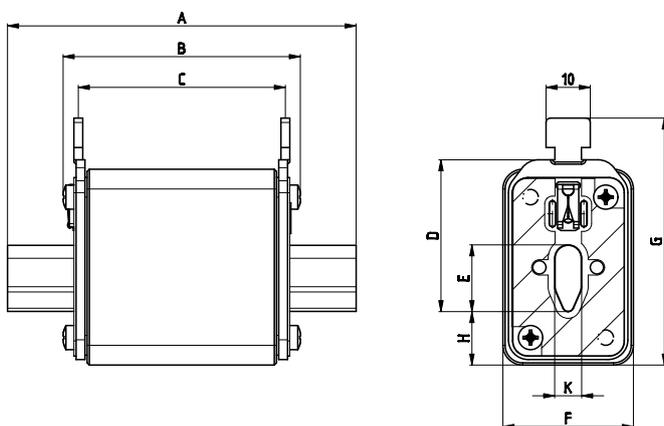



NH1, NH2, NH3 KOMBI

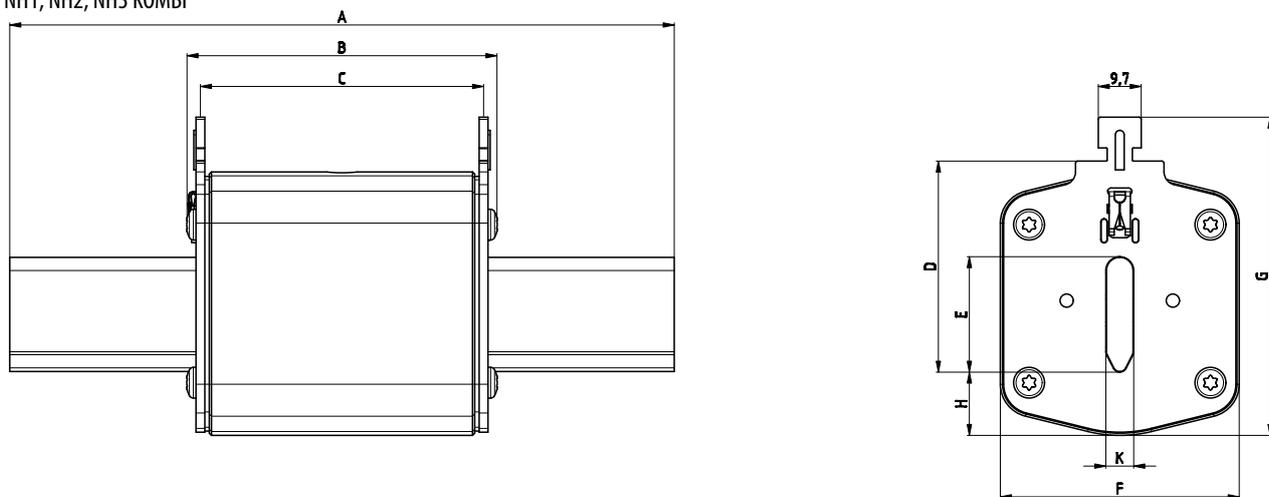

NH3C KOMBI

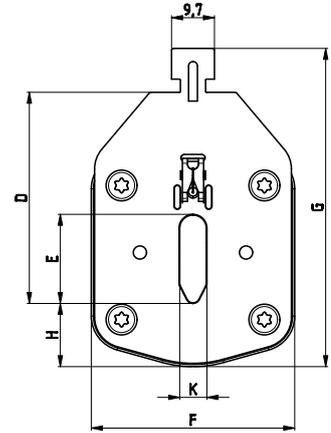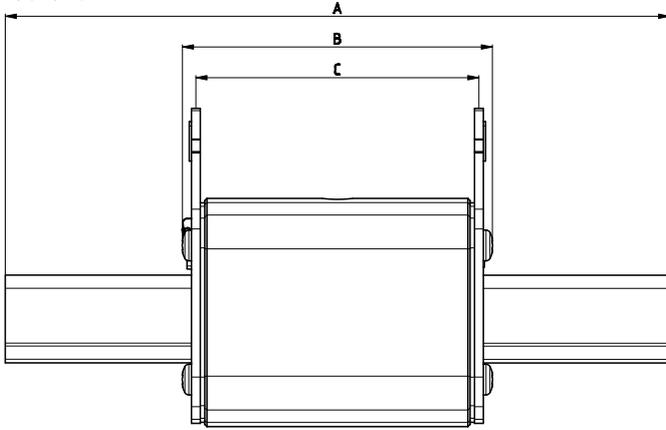


NH3 with top visual indicator

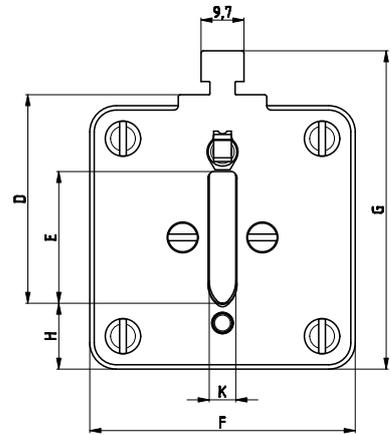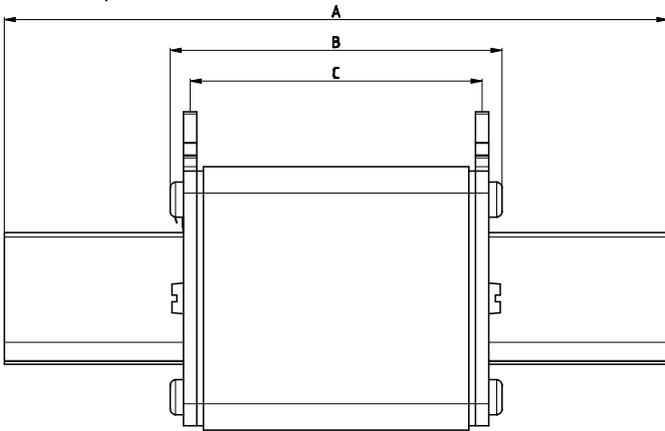


Time current characteristics I/t

NH00 KOMBI

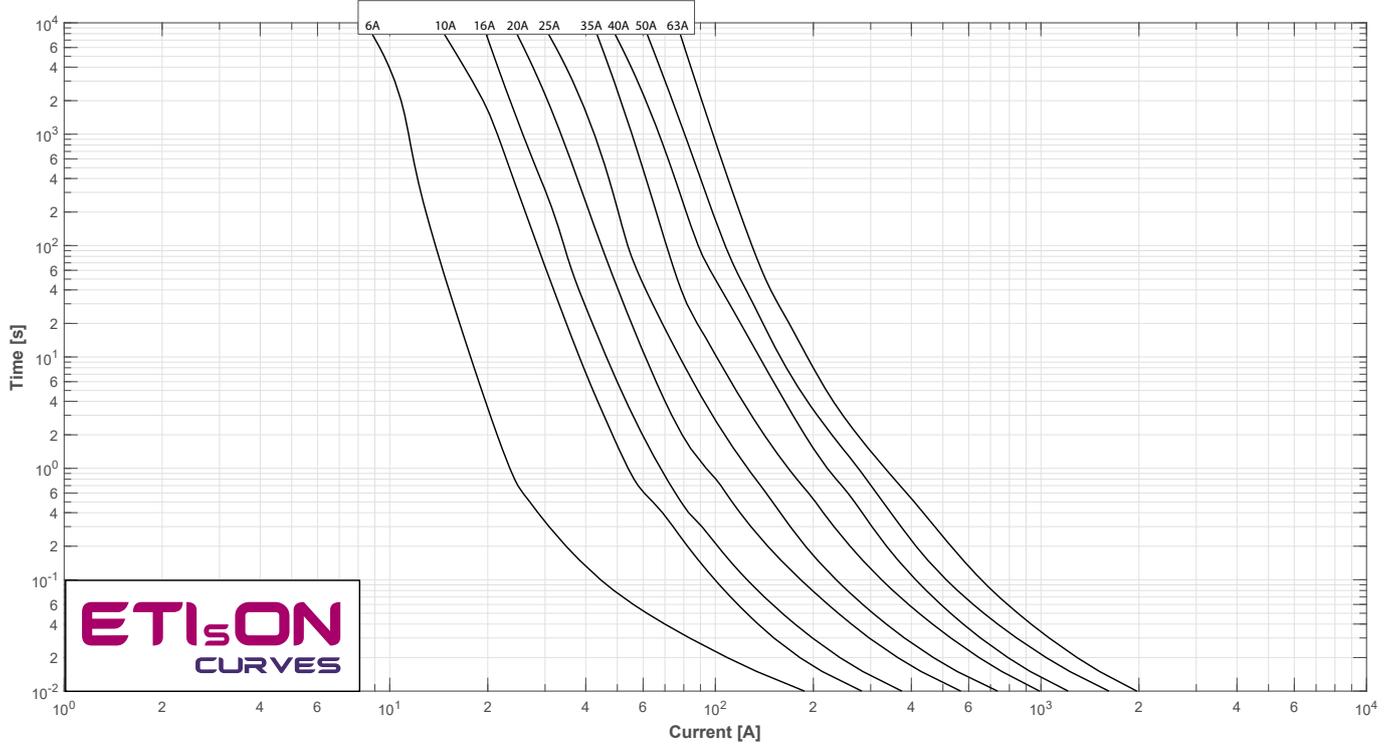


NH1 KOMBI

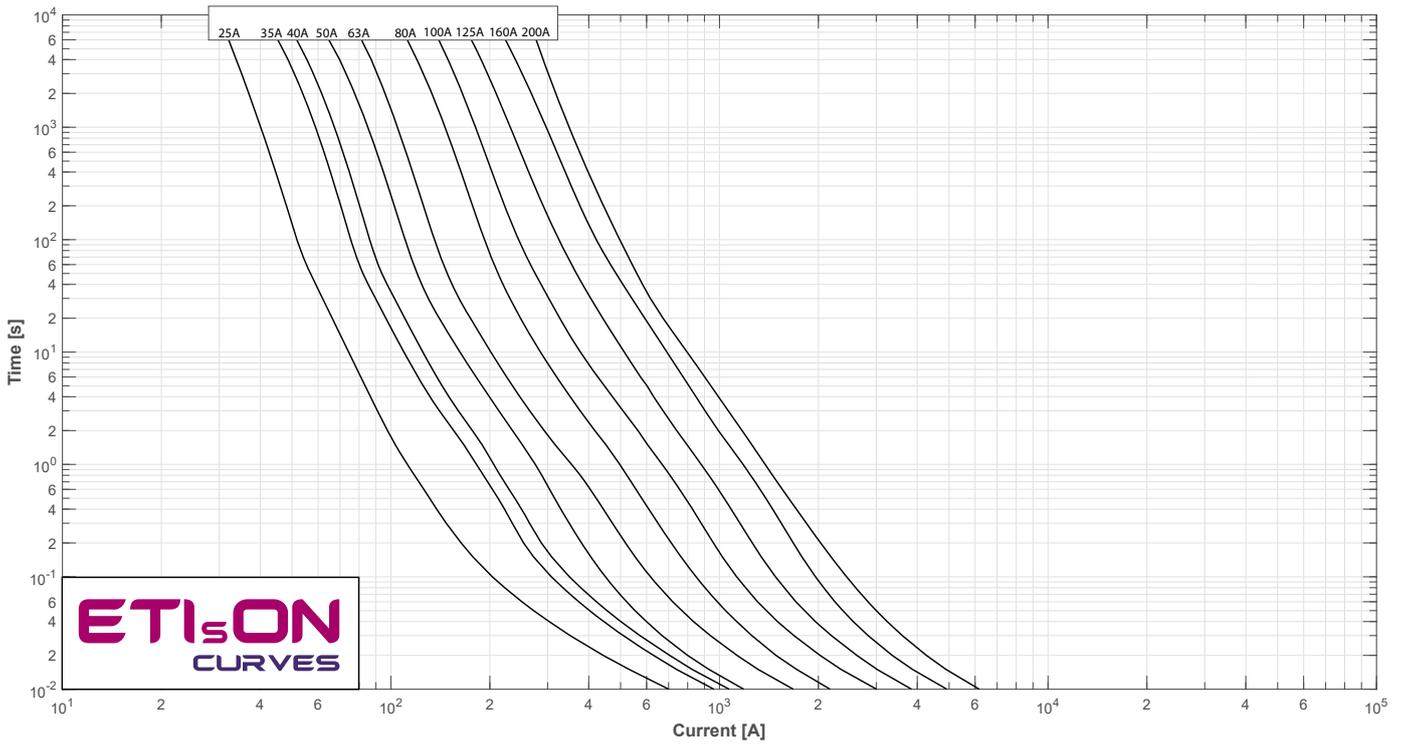






NH2 KOMBI

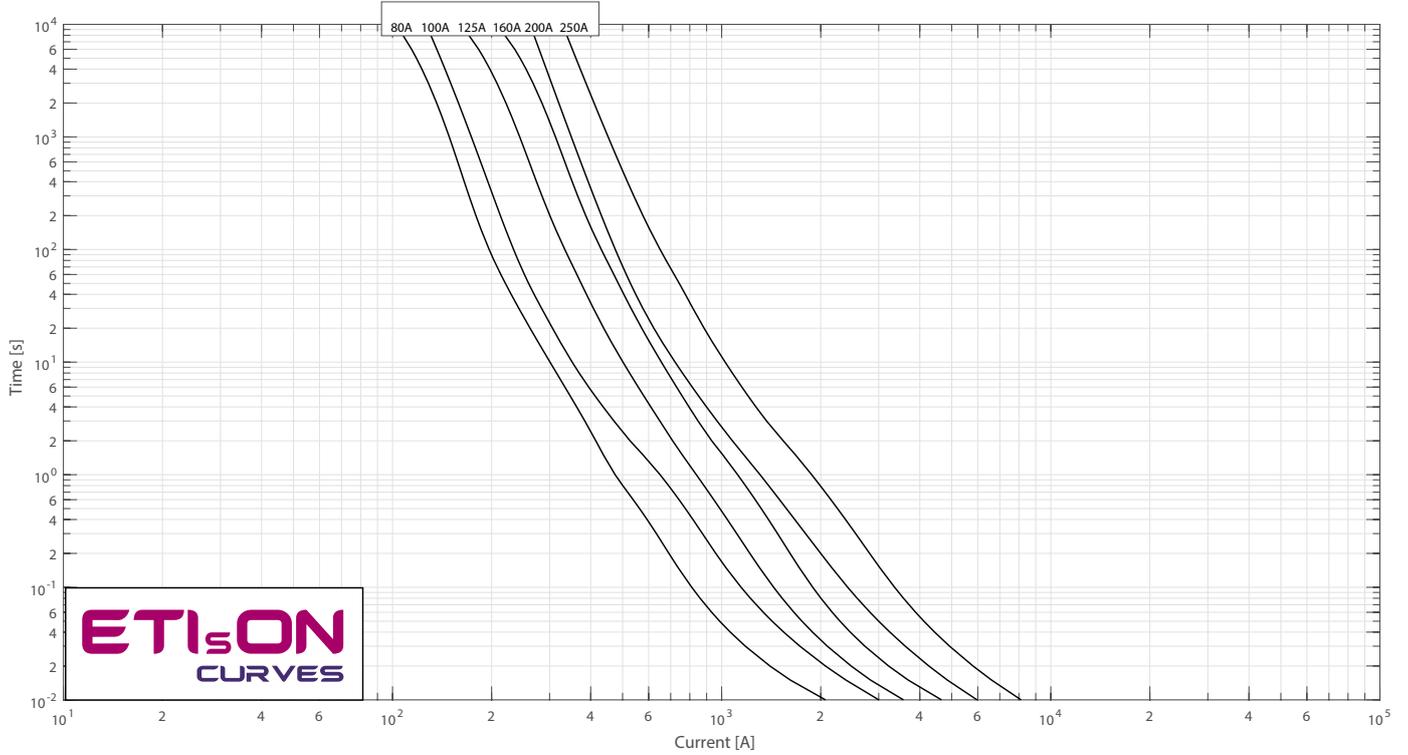

NH3C KOMBI

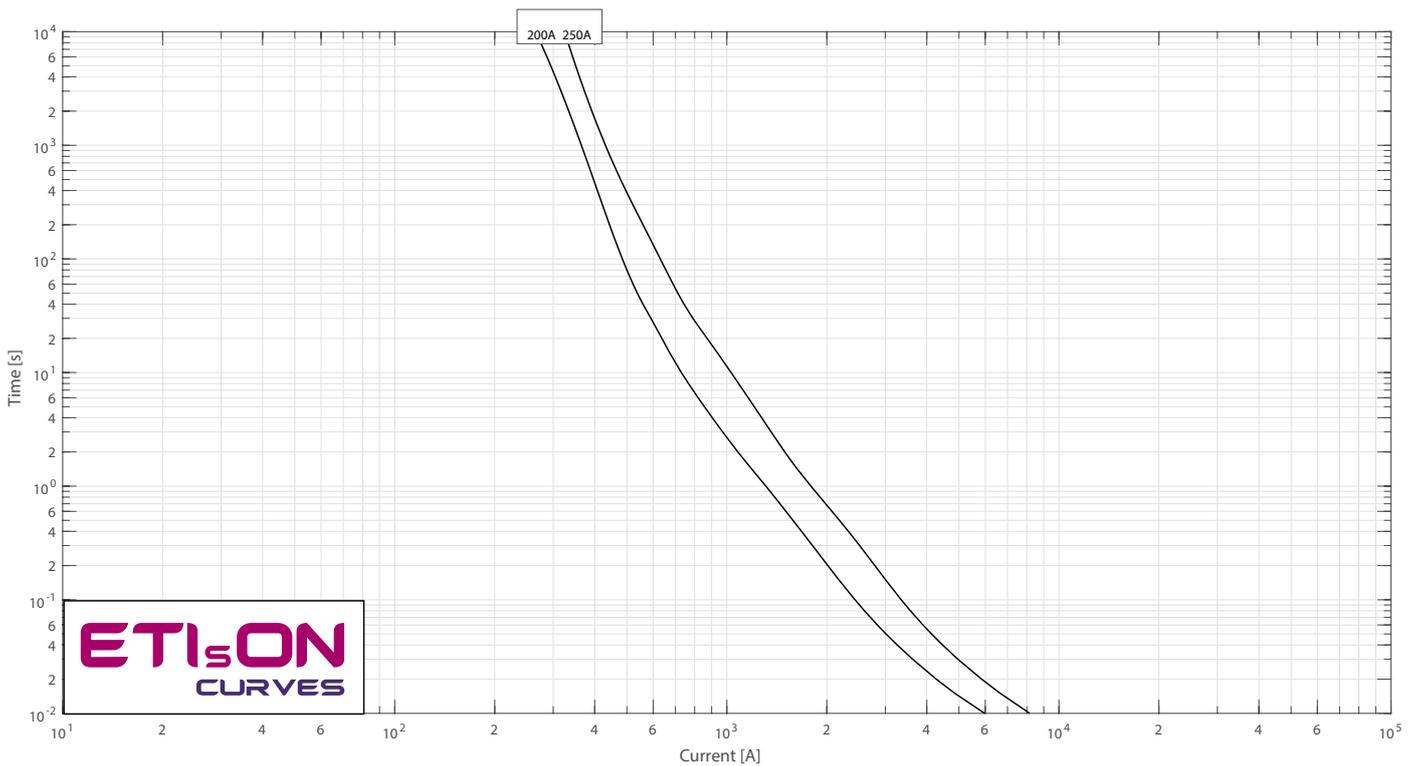

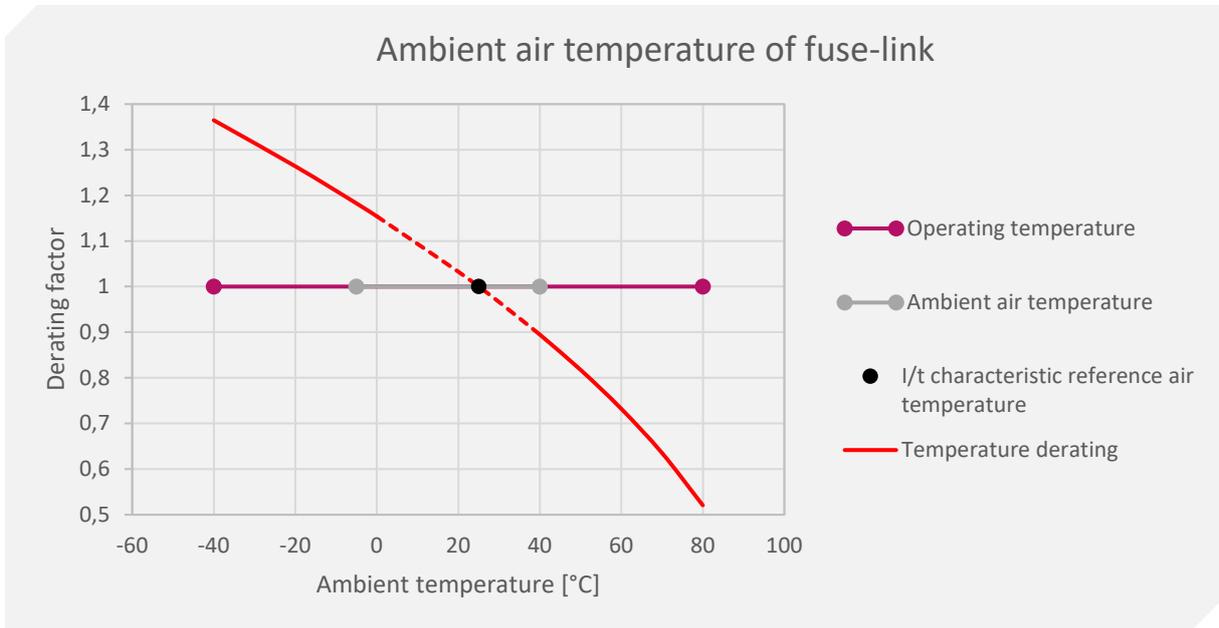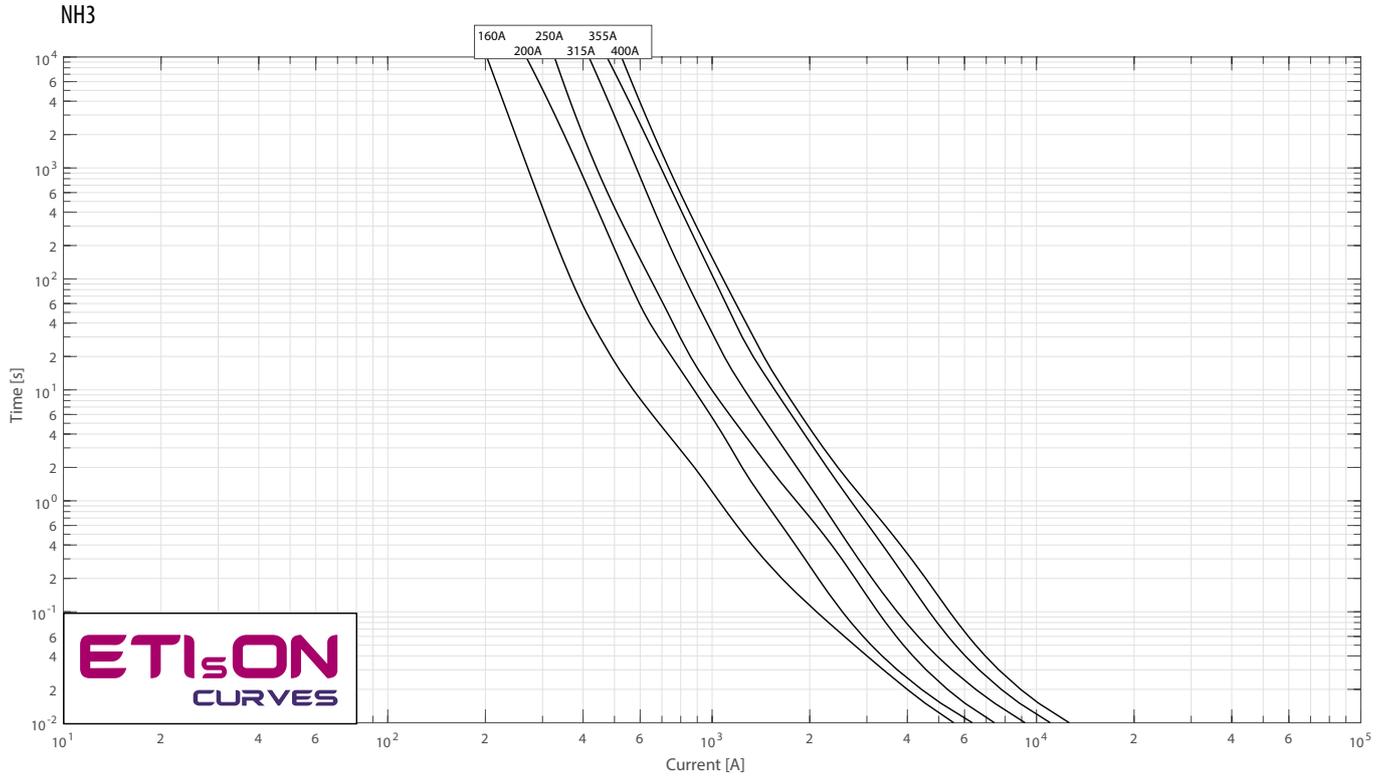

Legend:

T_{amb} – Ambient Temperature


TDF – Temperature Derating Factor

I_N – Nominal Current of Fuse-link


I_{TDF} – Nominal Current Including Temperature Derating Factor

Current calculation: $I_{TDF} = I_N \times TDF$

Cut-off current characteristics

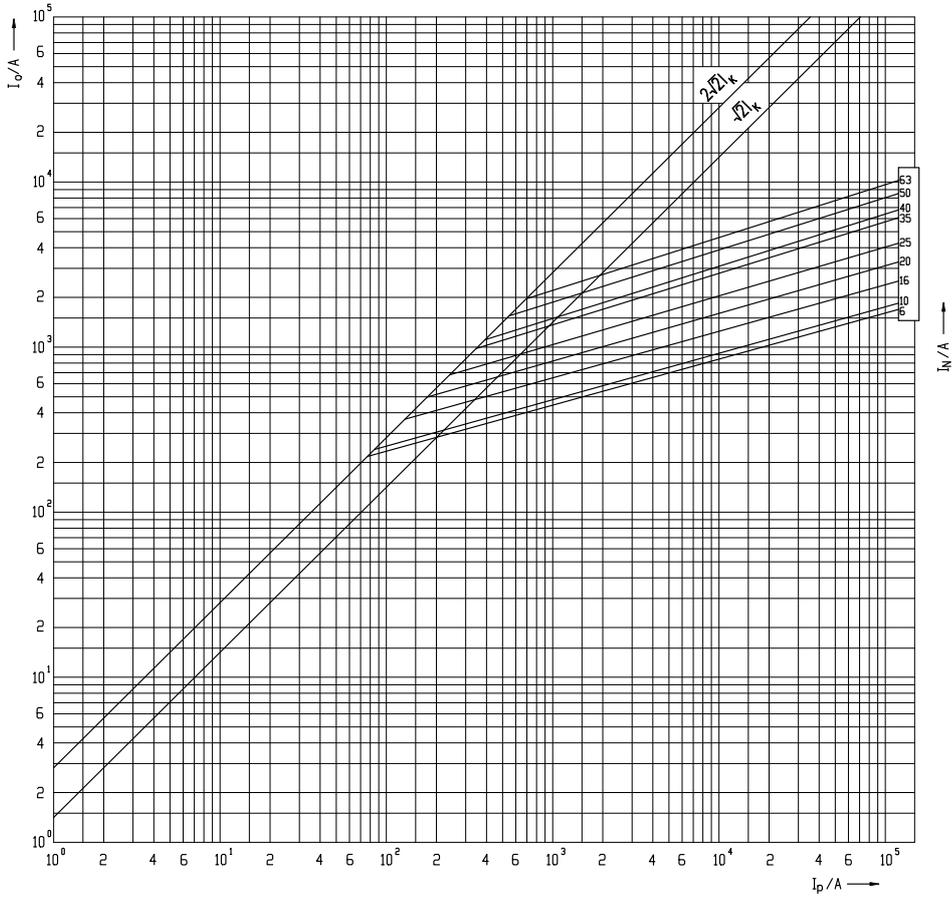


NH00

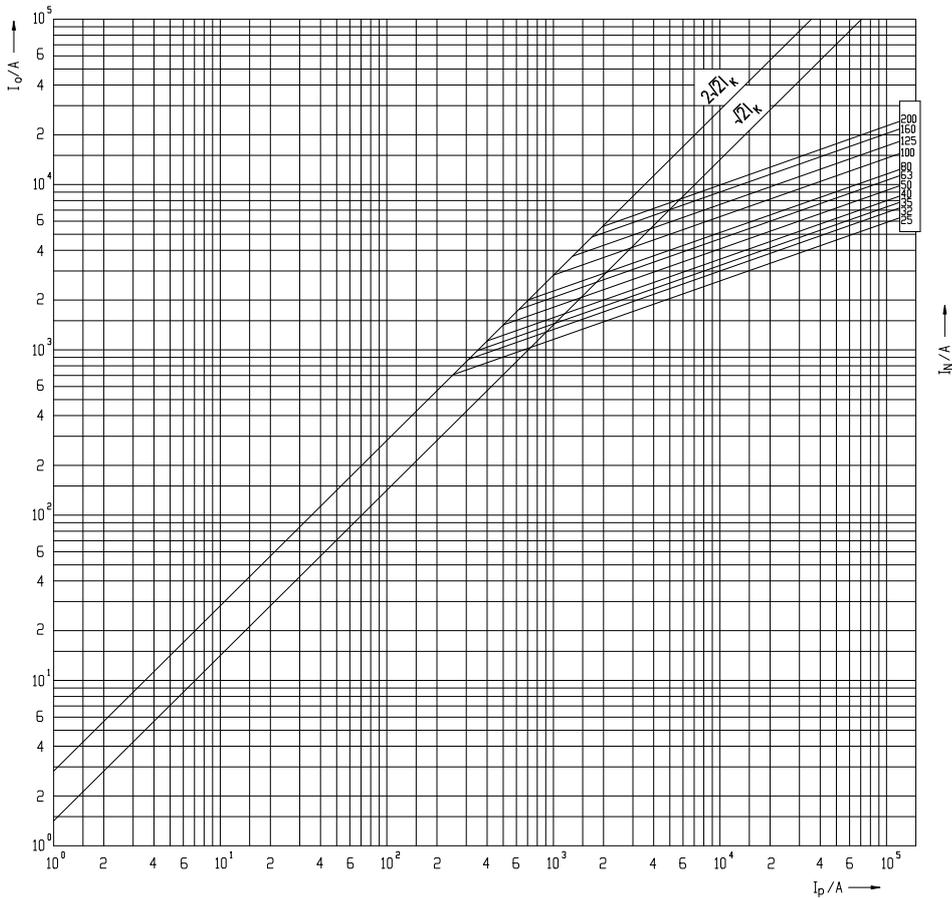


NH1

GREEN PROTECT / Protection of PV Inverters

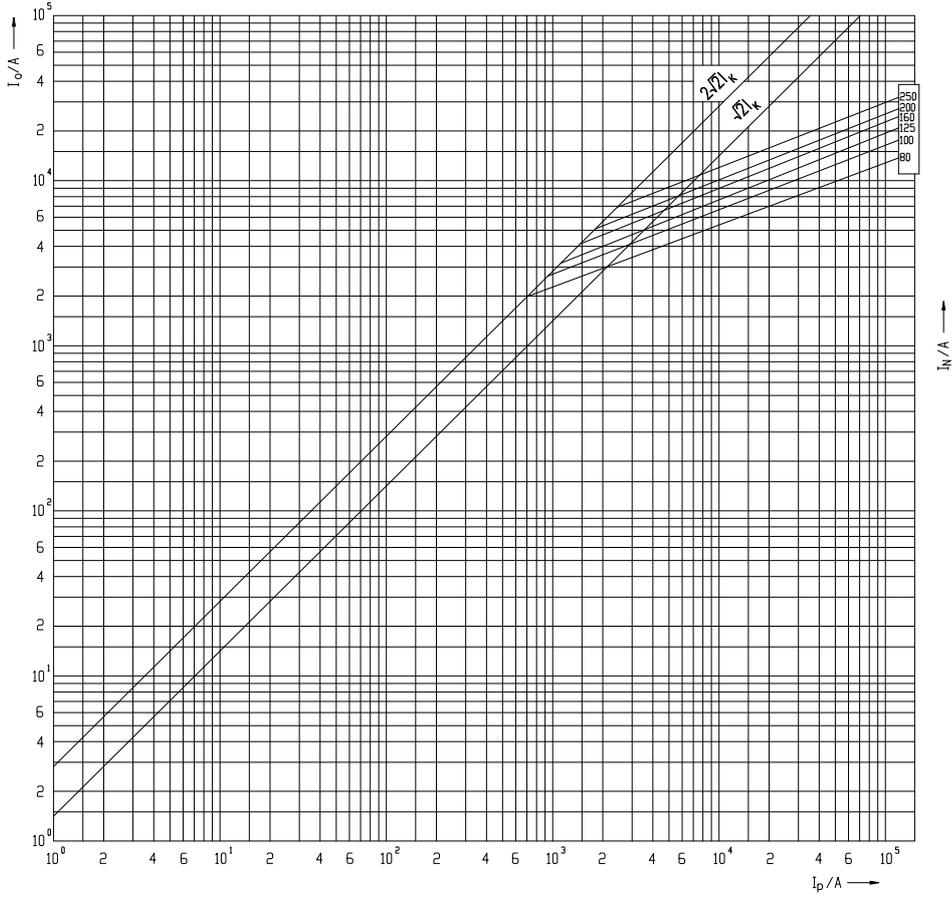


NH2

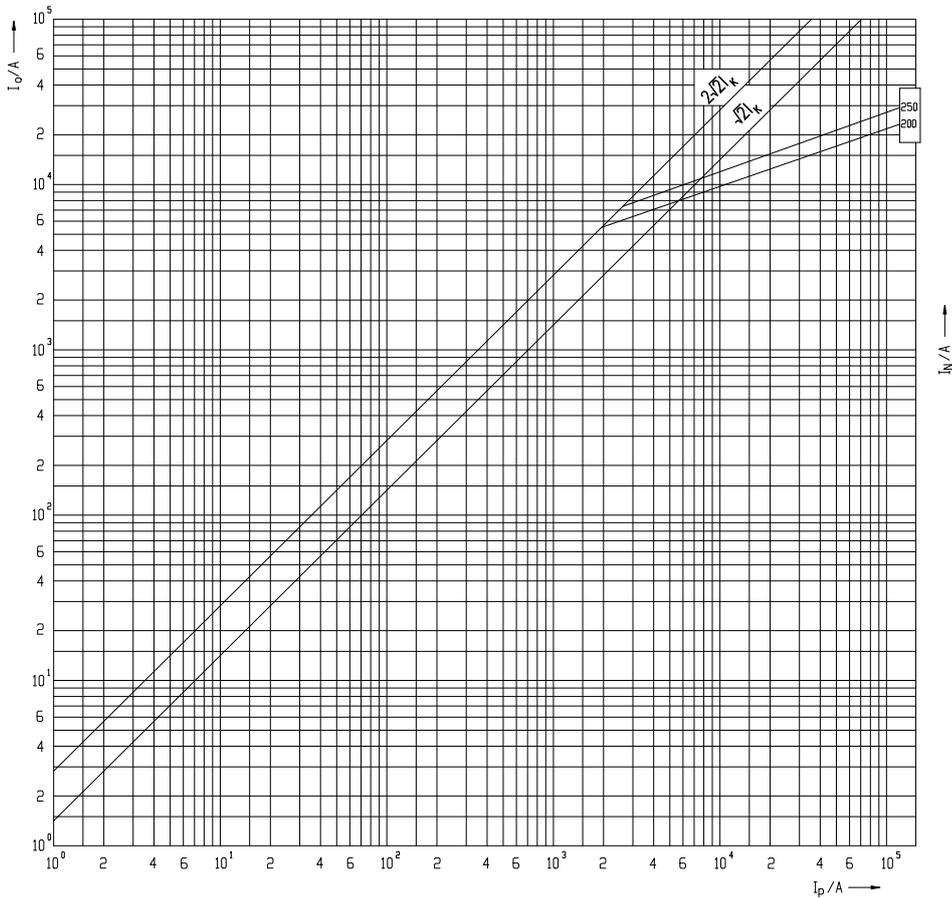

NH3C



NH3

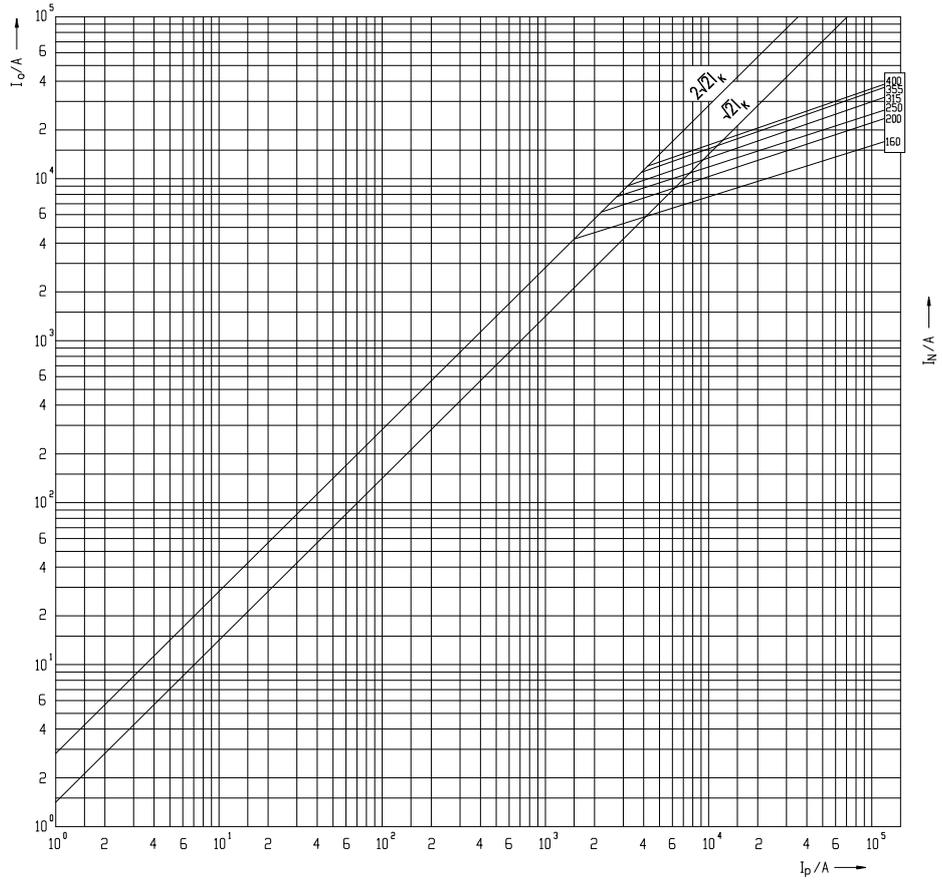

NH gS 800V a.c. Fuse-links

General characteristics

Rated voltage	800V a.c.
Rated current	16 - 500A
Breaking capacity	30kA (NH00), 120kA (NH1-3)
Characteristic	gS
Standards	IEC 60269-4
Application	For cable protection on a.c. side of PV inverter


NV/NH gS 800V a.c.

Size	Breaking capacity [kA]	I_n [A]	Standard indicator	Pre-arcing Joule integral [A ² s]	Operating Joule integral [A ² s]	Power dissipation [0,7 x I_n] Pd [W]	Power dissipation [W]		
NH00	30	16	004184504	15	1000	1,3	3,1	173	3/90
		20	004184505	32	1200	1,3	3,2		
		25	004184506	54	1600	1,8	4,3		
		35	004184507	250	5500	1,8	4,3		
		40	004184508	390	6300	1,9	4,5		
		50	004184509	460	9500	2,4	5,7		
		63	004184502	510	18.400	2,6	6,2		
		80	004184501	1.360	32.000	2,8	6,7		
		100	004184500	3.000	60.000	3,8	9		
		125	004184503	4.000	72.000	5,4	12,9		
NH1	120	160	004184623*	18.000	120.000	7,2	16	420	3/24
		200	004184624*	39.000	230.000	7,7	17		
		250	004184626*	50.000	350.000	9,7	21,5		
NH2	120	315	004723237	35.000	490.000	11,7	28	500	1/16
		350	004724234	70.000	825.000	10,5	25		
NH3	120	400	004724235	95.000	1.020.000	12,6	30	660	3/15
		280	004186623*	60.000	400.000	11,5	25,5		
		315	004186624*	80.000	820.000	11,9	26,5		
		350	004186625*	110.000	1.000.000	12,6	28		
		400	004186626*	160.000	1.500.000	14,9	33		
		500	004725235	220.000	2.100.000	14,0	33,5	1200	


* NEW! Dual Trip Indication KOMBI




NH00

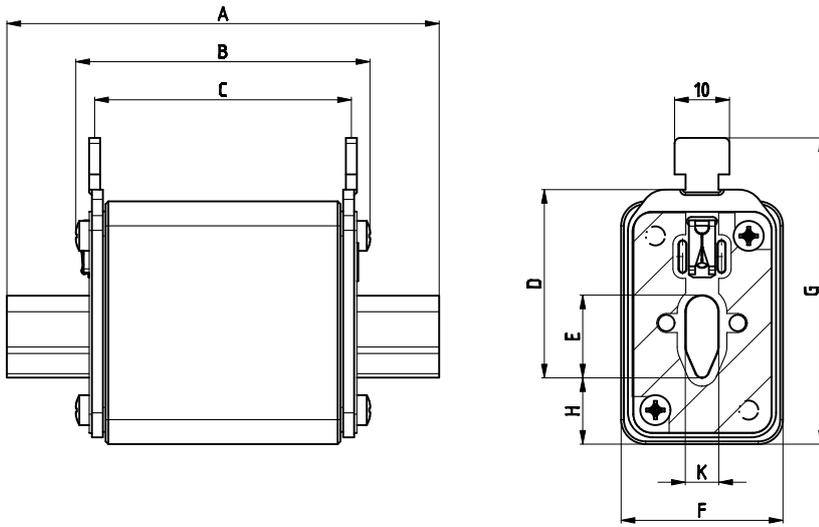

NH1, NH2, NH3 - Standard (Top) Indicator

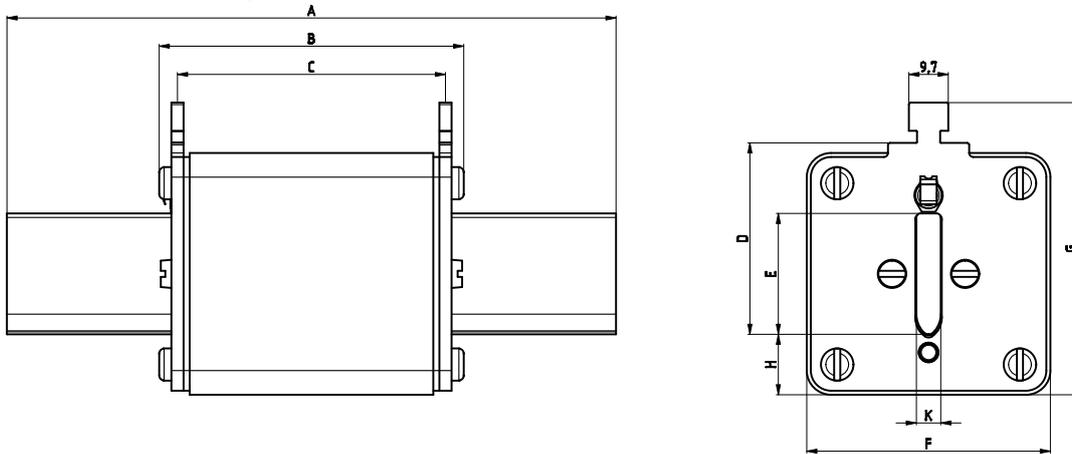


NH1, NH3 - Dual Trip Indication KOMBI

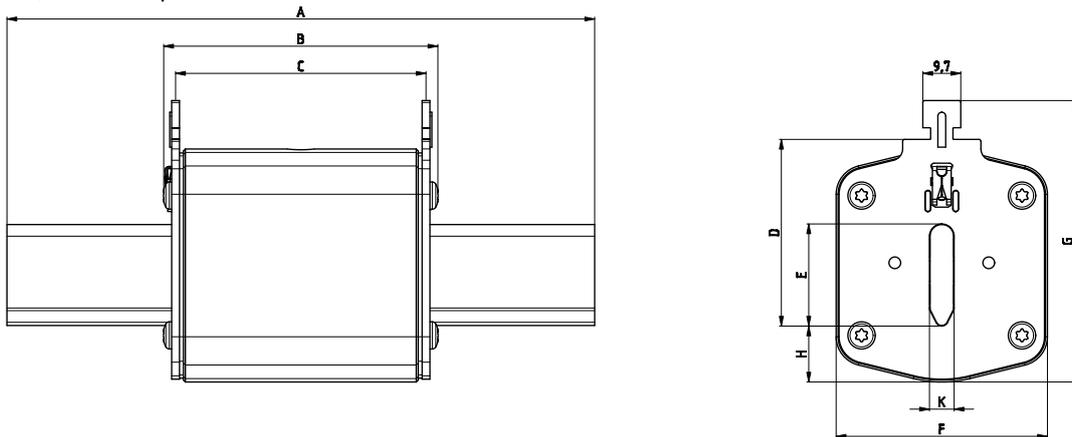


Size	Dimensions [mm]								
	A	B	C	D	E	F	G	H	K
00	79	53	47	35	15	28	56	12	6
1	135	72	65	40	24	51	62	12	6
1 KOMBI	135	72	65	40	20	46	65	14	6
2	150	72	65	48	30	61	71	12	6
3	150	72	65	60	37	73	84	12	6
3 KOMBI	150	72	65	60	33	65	84	14	6

Time current characteristics I/t

NH00

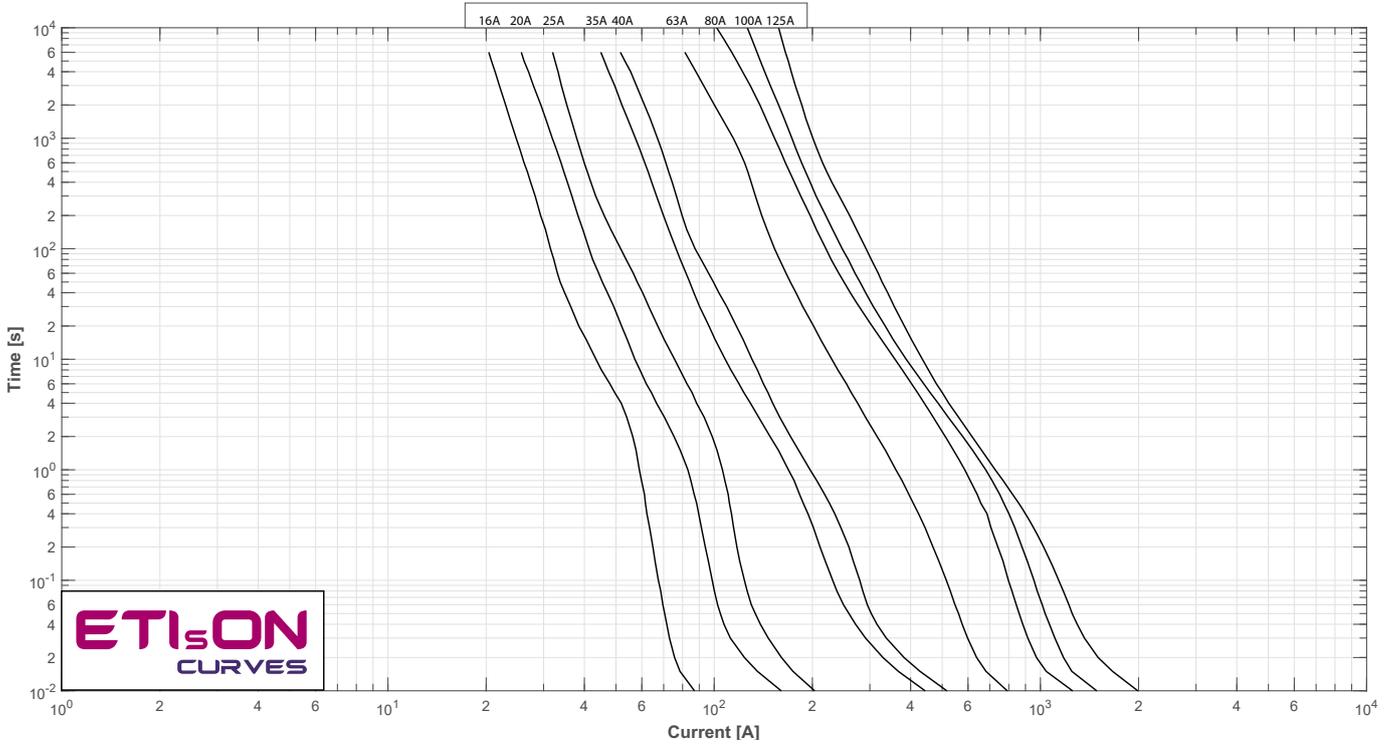


NH1

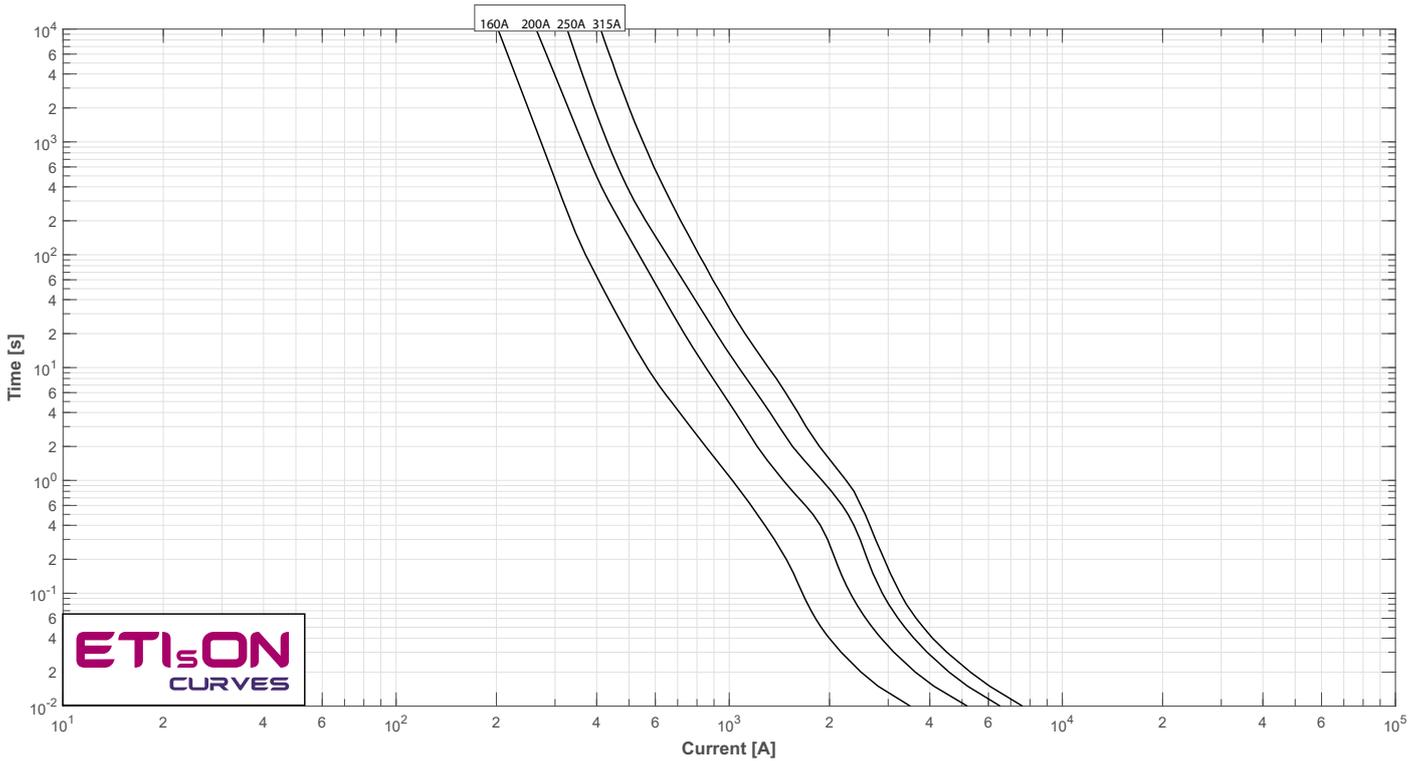






NH2

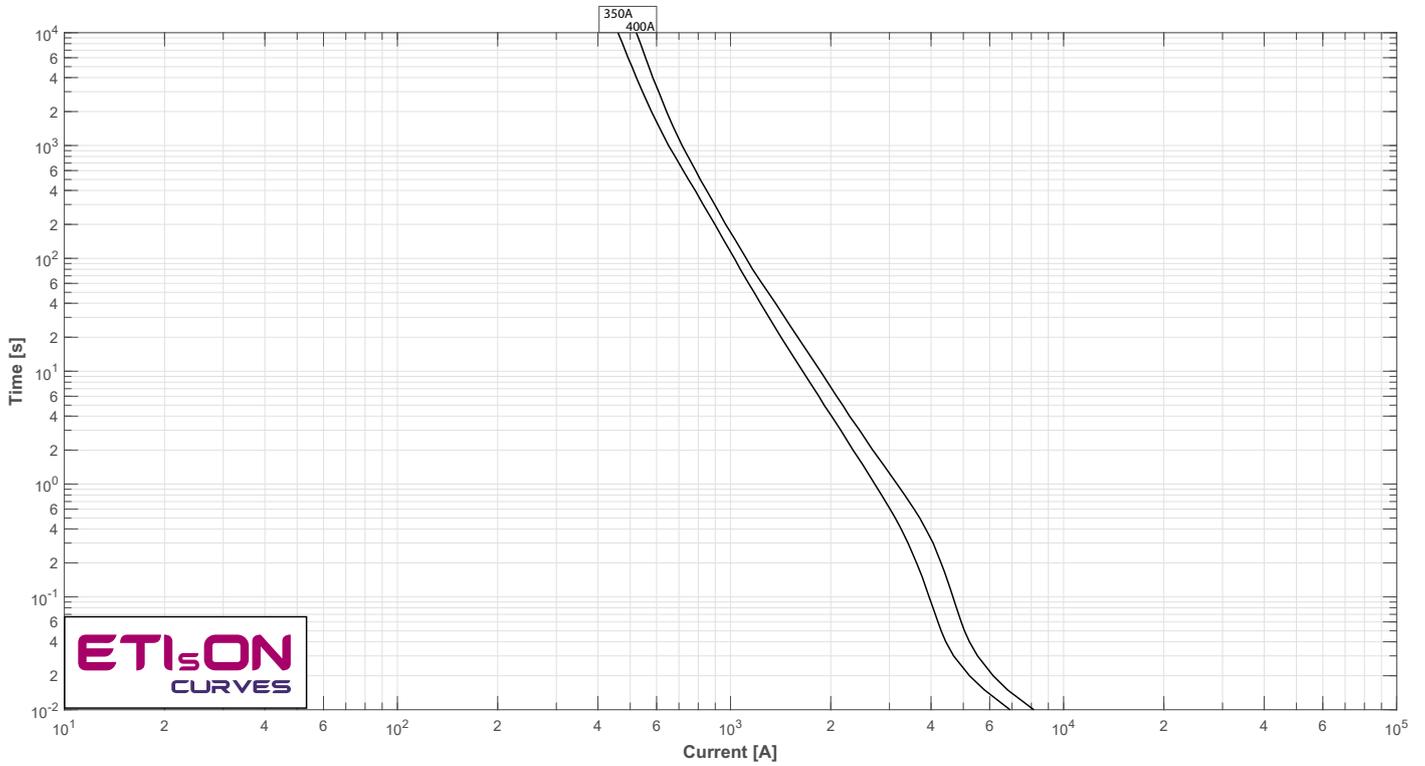


NH3

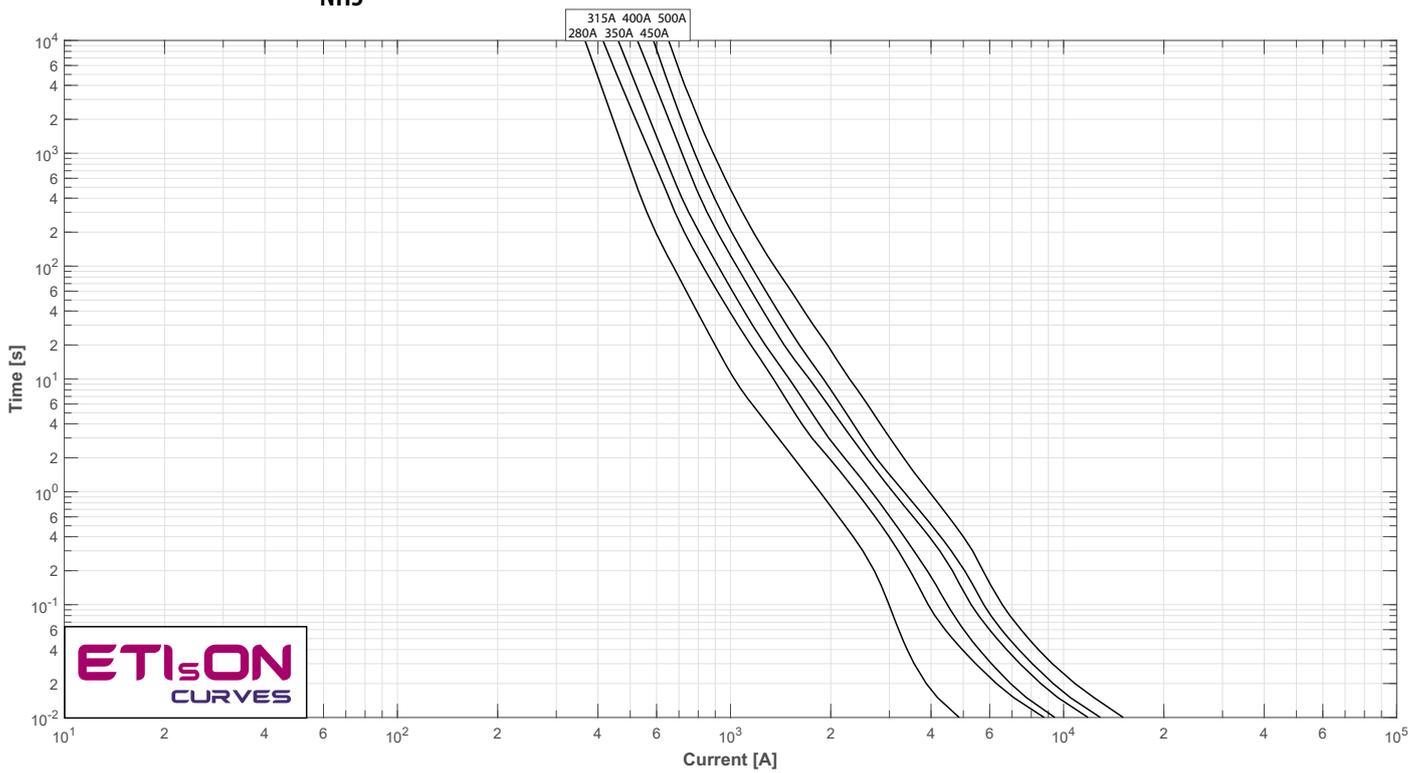


Cut-off current characteristics

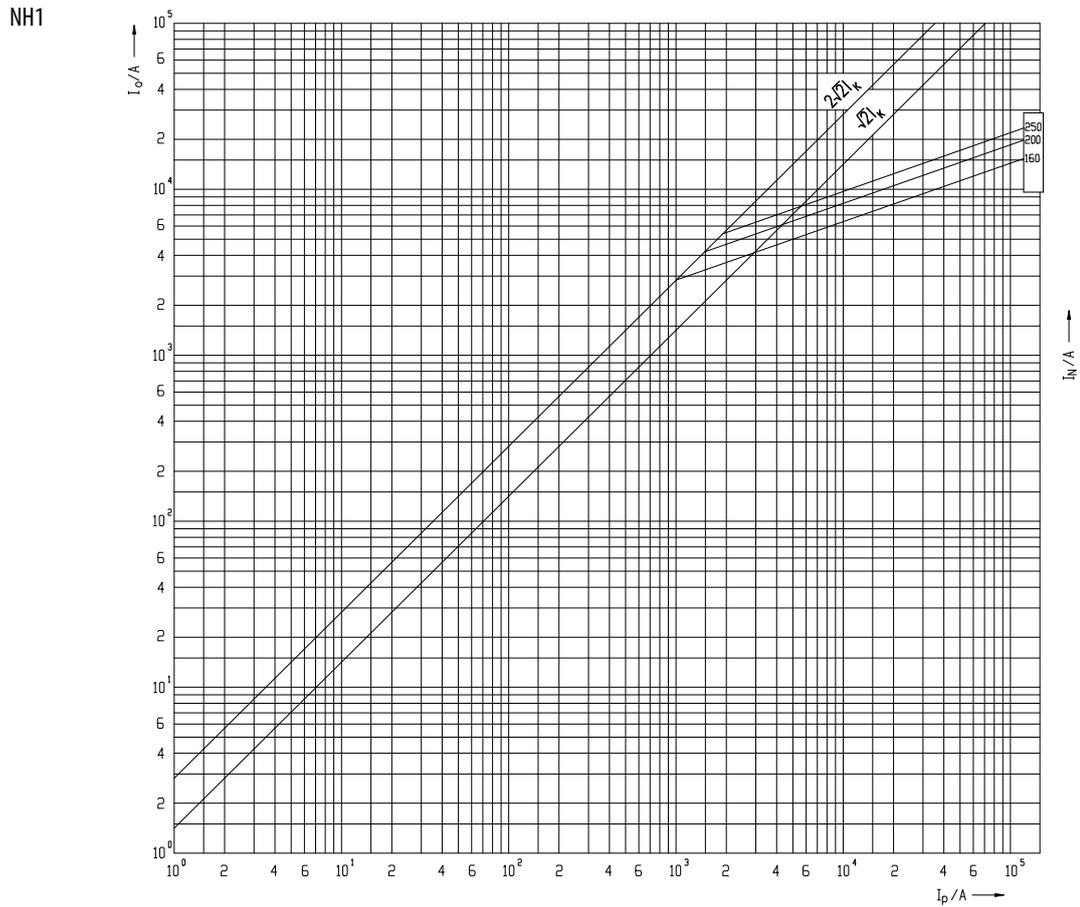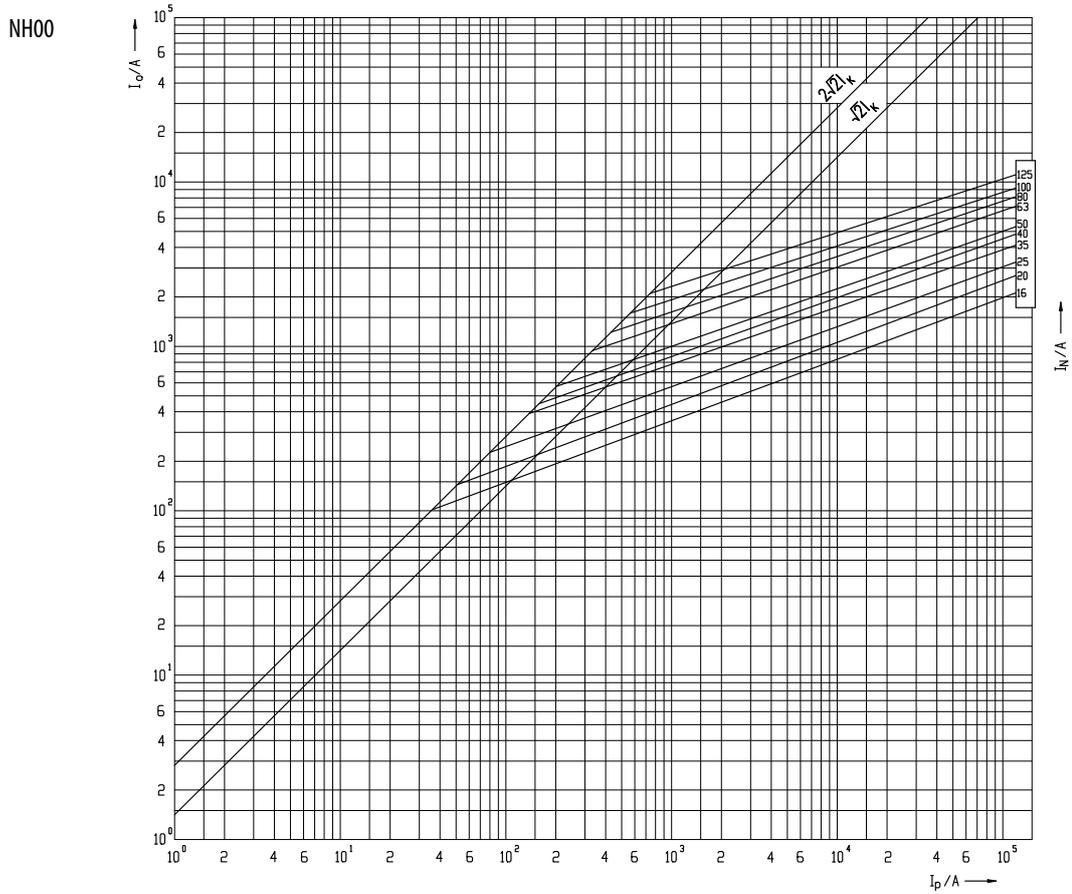


NH1

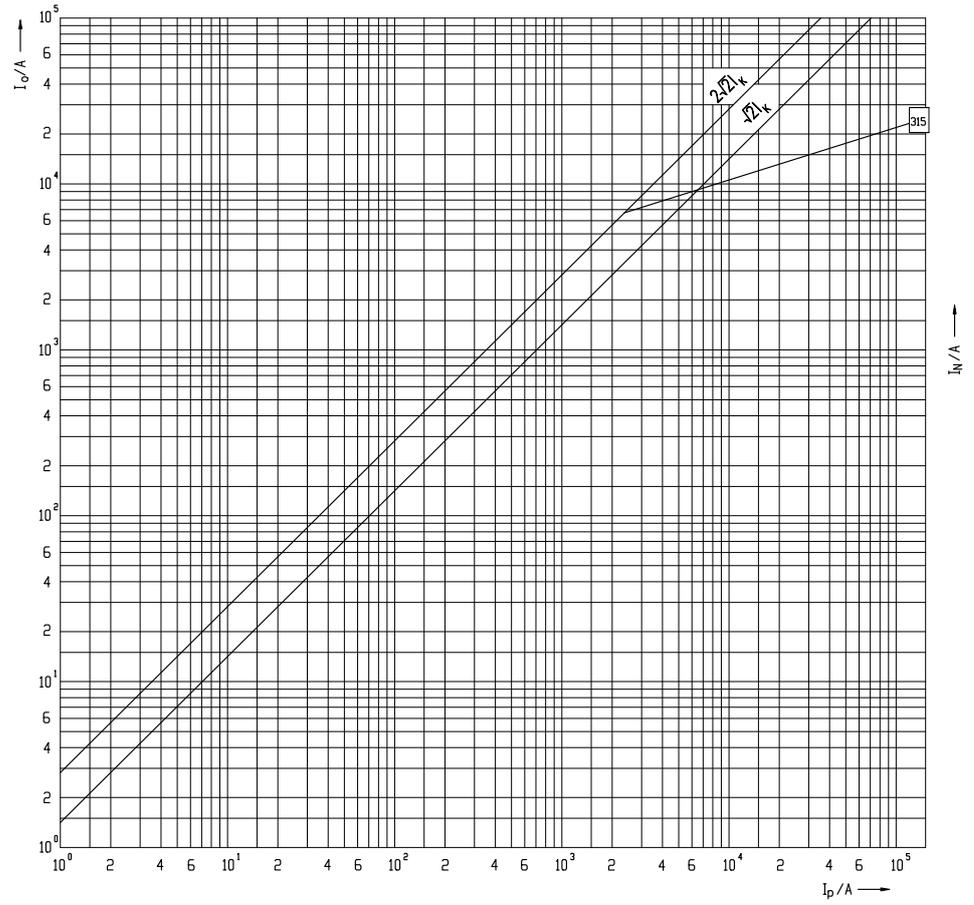


NH2

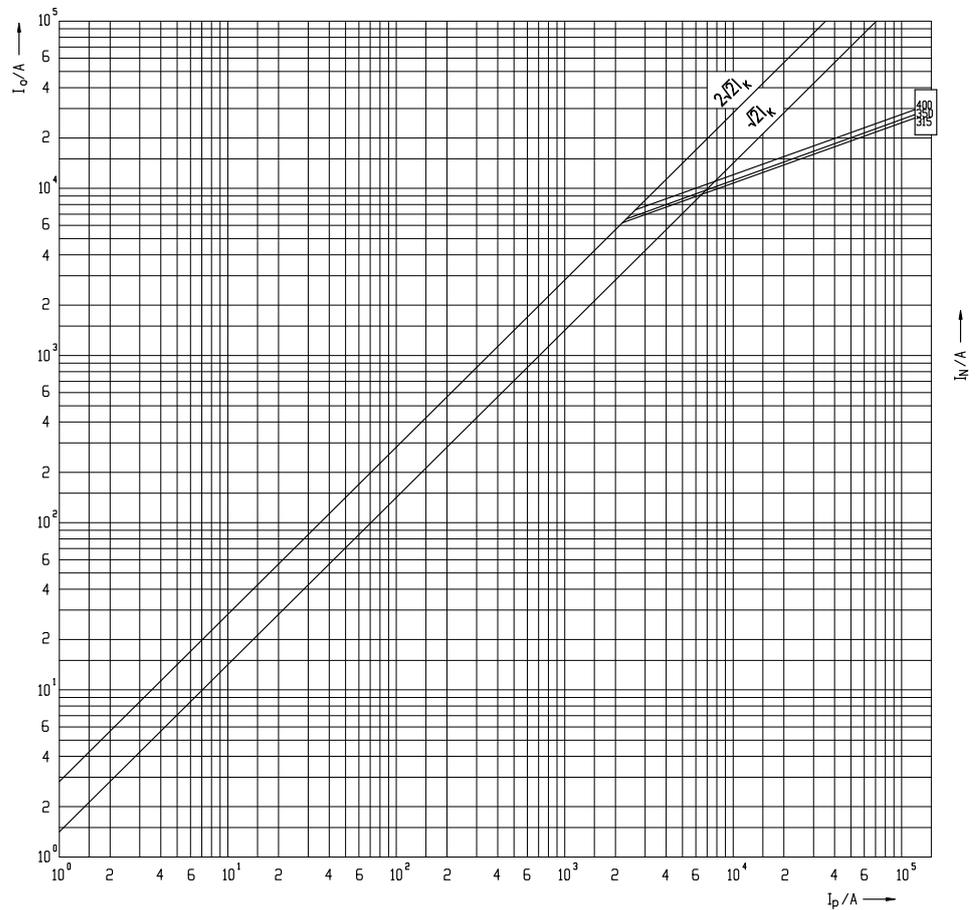


NH3

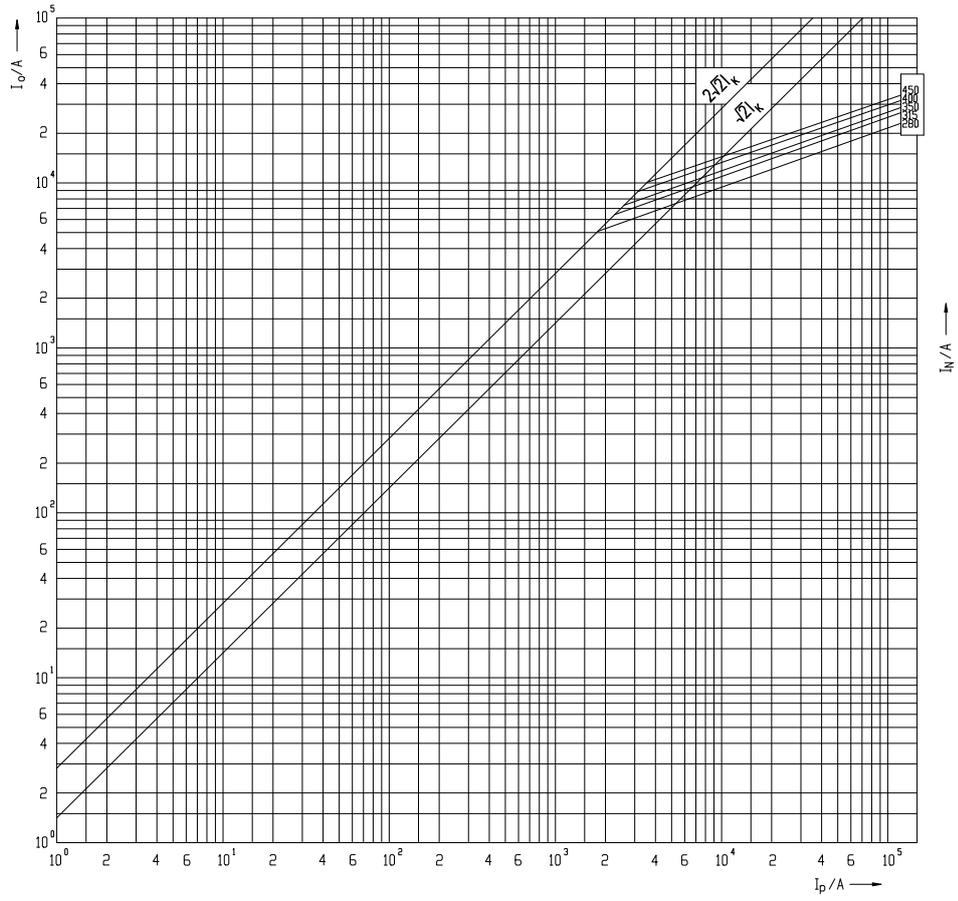

NH3

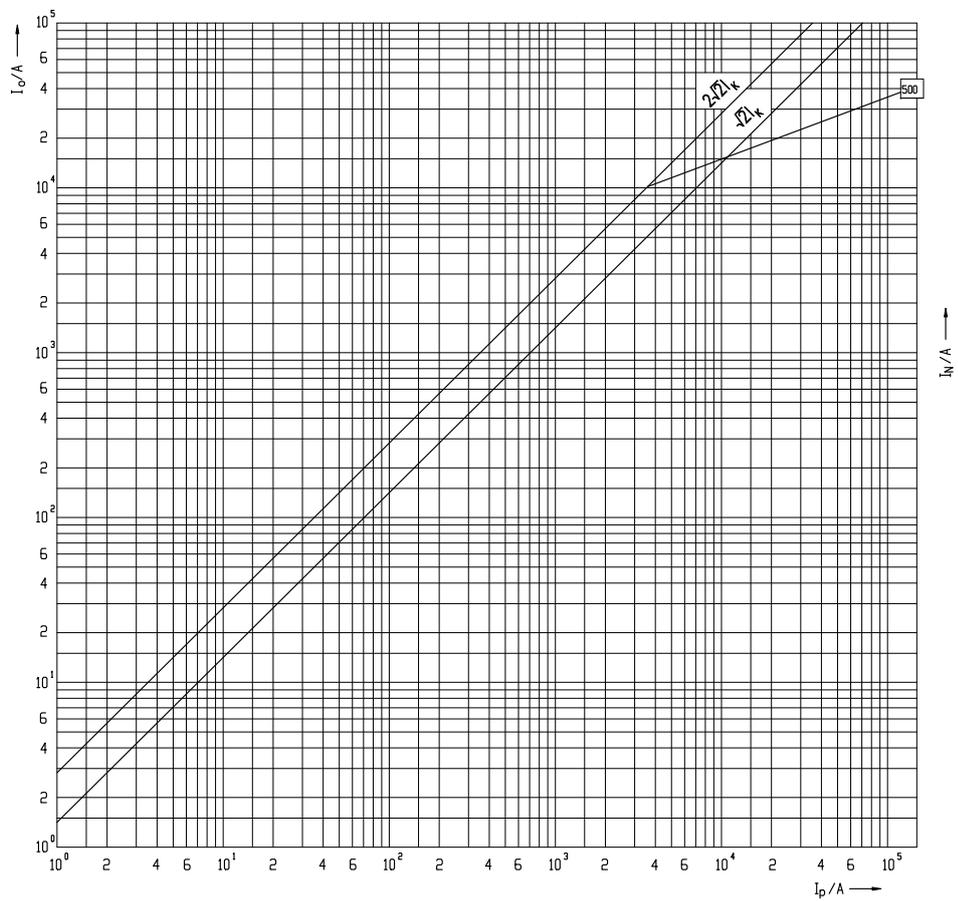

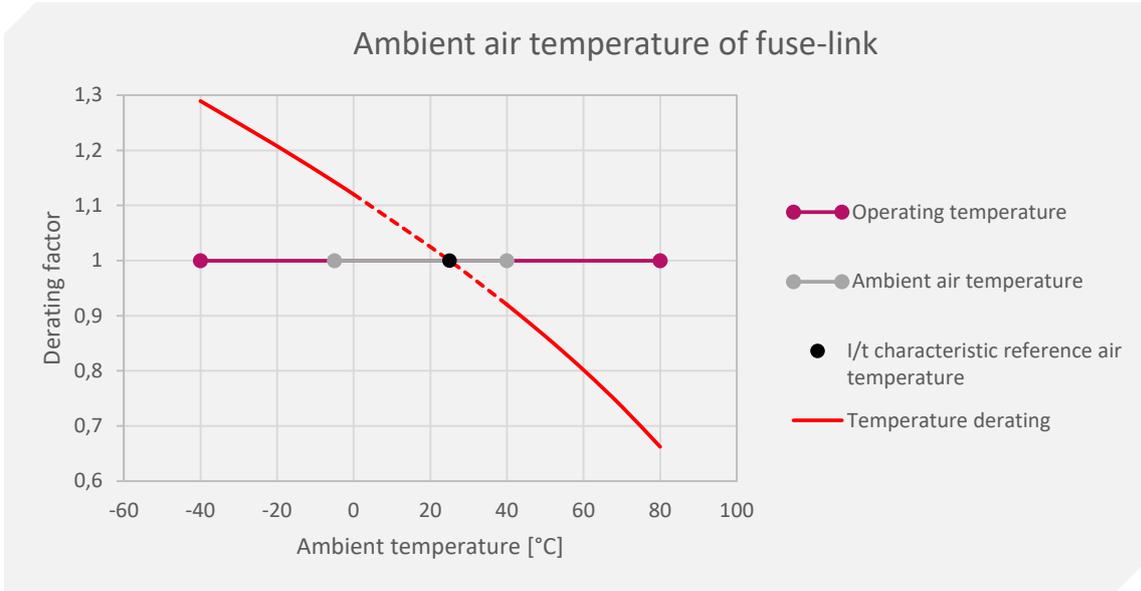

Legend:

T_{amb} – Ambient Temperature

TDF – Temperature Derating Factor

I_N – Nominal Current of Fuse-link

I_{TDF} – Nominal Current Including Temperature Derating Factor

Current calculation: $I_{TDF} = I_N \times TDF$

BATTERY FUSE



 etigroup
www.etigroup.eu



BATTERY
FUZE

BECAUSE EVERY
SECOND COUNTS

**NH Fuse-links with
gBat Characteristic**

ETI
SWITCH TO
A SAFE FUTURE

Battery Storage Fuse Selection

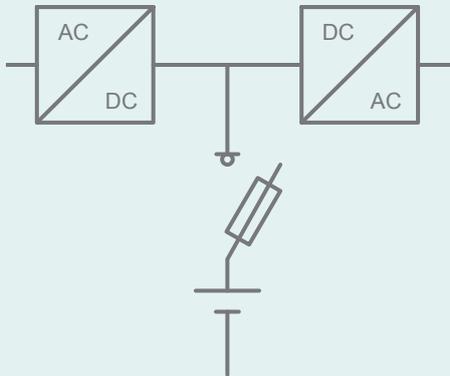


Short circuit current

- Short circuit current depending on battery model, type and capacity, low compared to operating current
- Short circuit current has to be interrupted in <5 seconds
- Required steep characteristics: protection with Battery fuse-link required!

Operating current

- Operating current depends on battery storage specification
- Battery operation: voltage of DC link circuit decreases to the final discharge voltage
- Consider maximum current at final discharge voltage for fuse-link selection

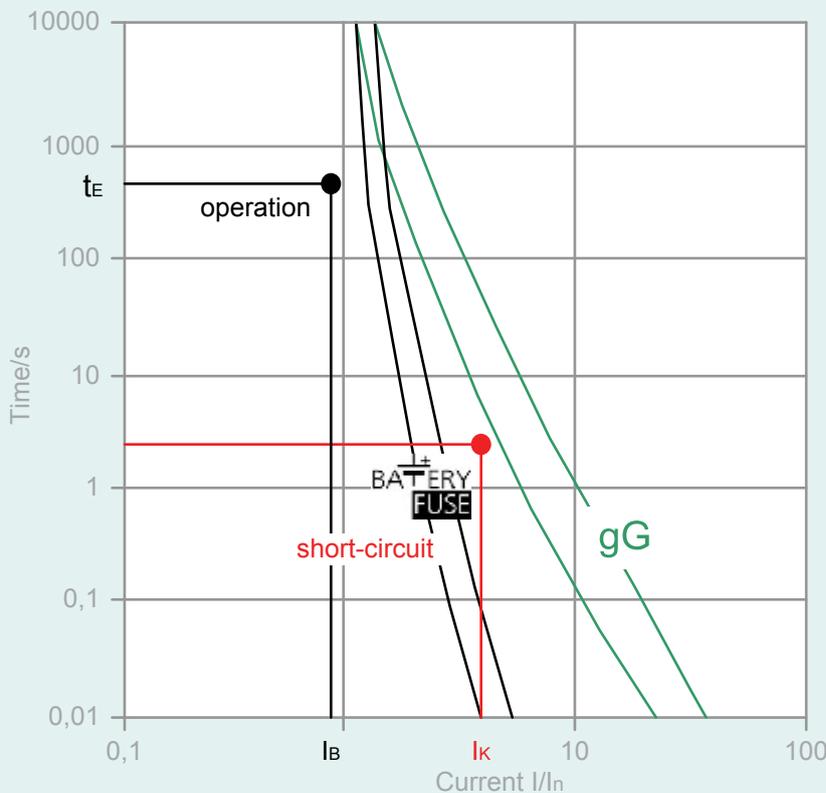

In accordance with IEC 60269-7

Short circuit point (I_k)

- Short circuit current depending on battery model and type
- Manufacturer datasheets to include short circuit current according to IEC896
- Operating point has to be in adequate distance below the curve
- Short-circuit point has to be above the range of tolerance of the curve

Operating point (t_E/I_B)

- maximum operating current I_B has to be calculated from battery storage true power and final discharge voltage U_E : $I_B = P_w/U_E$
- t_E is the back-up time of battery storage system

When choosing fuse switch disconnector consider fuse-link power dissipation!

$$P_d(I_B) < P_y$$

Power dissipation of fuse-link at maximal operating current (I_B):

$$P_d(I_B) = (I_B/I_n)^2 \times P_d(I_n)$$


I_B - maximal operating current

$P_d(I_B)$ - power dissipation of fuse-link at maximal operating current

$P_d(I_n)$ - power dissipation of fuse-link at nominal current

P_y - maximal permissible fuse-link power dissipation mounted in fuse switch disconnector

Low Power Dissipation and Fast Characteristic in Time Range of 5s!



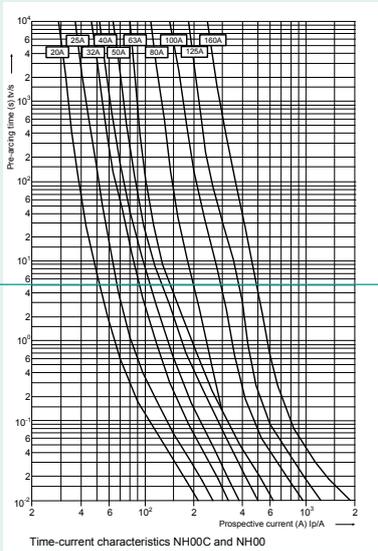


Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	1000A(5s)
Short Circuit Current	3300A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	14.4-14.7V
Maximum charging current	60A
Temperature compensation	-30mV/°C

5s

I_k

Better protection of battery cells on overheating in case of short circuit comparable to standard gG characteristic

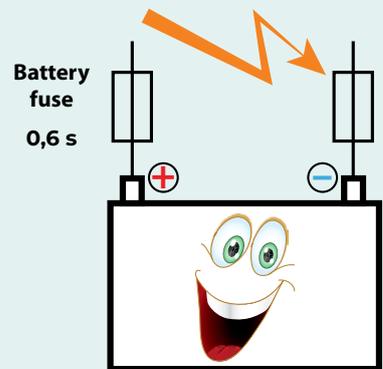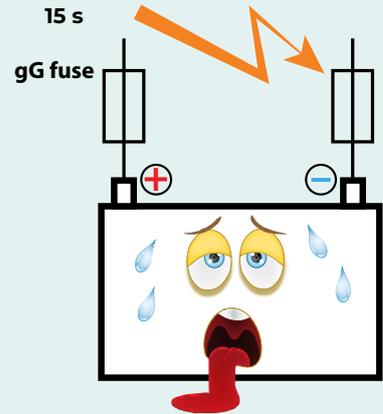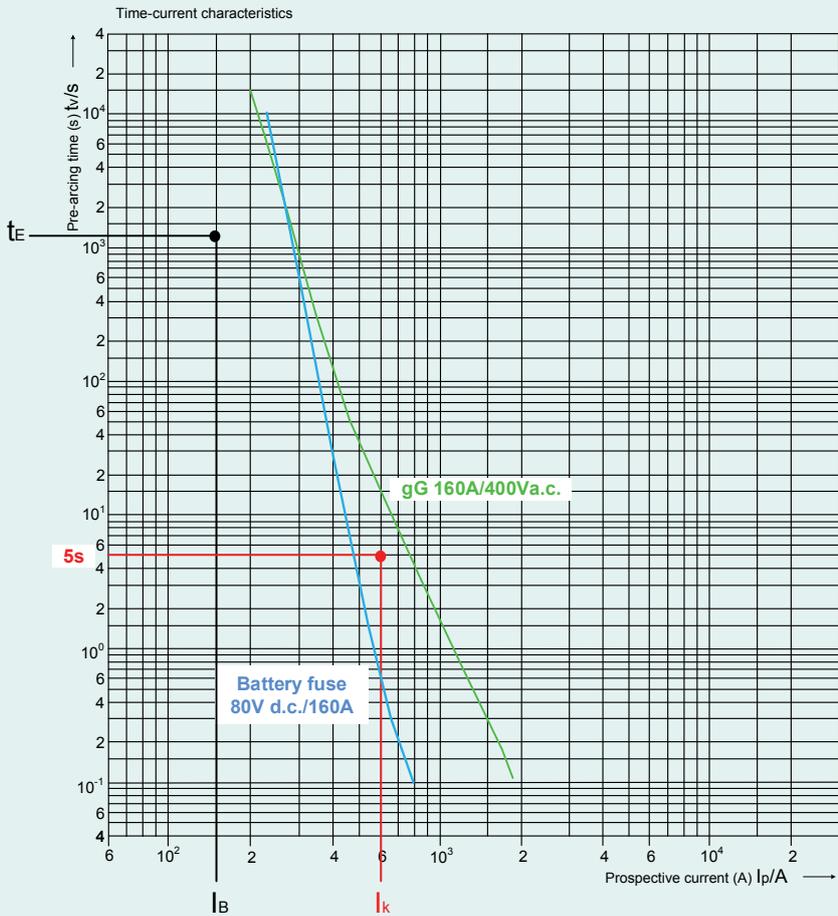

NH gBat fuse-link 80V d.c.

General characteristics


Rated voltage	80V d.c., L/R=10ms
Breaking capacity	50kA d.c..
Standard	IEC 60269-7
Application	Battery protection
Fuse base	NH00C, NH00: 004123001 PK00 NH1C, NH1: 004123100 PK1

NH gBat fuse-link 80V d.c.


Size	I _n [A]	Standard indicator	Power dissipation [W]	Power dissipation 0,7xI _n [W]	Pre-arcing Joule integral [A ² s]	Operating Joule integral [A ² s]	g	Box
00C pic. 1	20	004110075	4,6	2	360	414	125	3/120
	25	004110076	5,8	2,6	710	817		
	32	004110077	6,6	3	920	1.058		
	40	004110078	9,4	4,2	1.440	1.656		
	50	004110079	11,1	5	2.820	3.243		
00 pic. 1	63	004110080	11,7	5,2	4.160	4.784	173	3/90
	80	004110081	10,4	4,7	4.670	5.371		
	100	004110082	11,1	5	9.360	10.764		
	125	004110083	13,4	6	14.750	16.963		
	160	004110084	15,5	7	27.880	32.062		
1C pic. 2	20	004110085	6,3	2,8	360	414	233	3/45
	25	004110086	7,3	3,3	710	817		
	32	004110087	9	4	920	1.058		
	40	004110088	11,2	5	1.440	1.656		
	50	004110089	14,5	6,5	2.820	3.243		
	63	004110090	16,8	7,5	4.160	4.784		
	80	004110091	11,4	5,1	4.670	5.371		
1 pic. 3	100	004110092	12	5,4	9.360	10.764	430	3/24
	125	004110093	14,8	6,6	14.750	16.963		
	160	004110094	17,6	7,9	27.880	32.062		
	200	004110095	26,6	11,9	41.990	48.289		
	250	004110096	31	13,9	81.000	93.150		




Picture 1

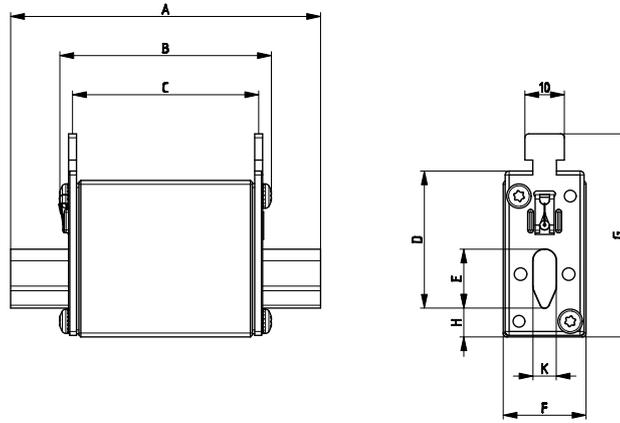

Picture 2

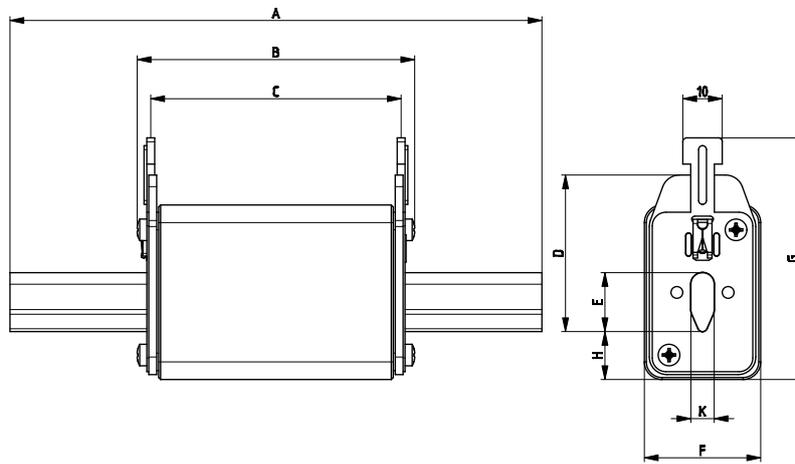


Picture 3

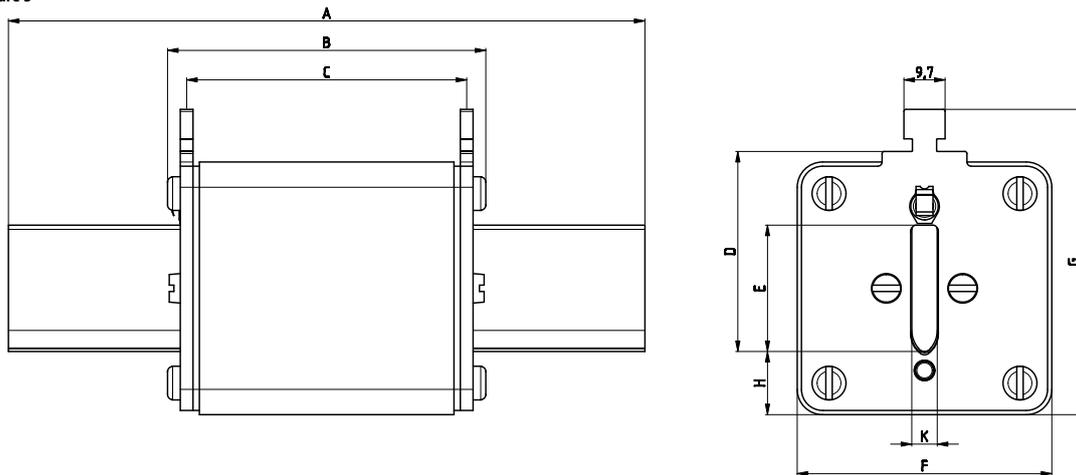


Size	A	B	C	D	E	F	G	H	K
00 C	79	53	47	35	15	21	52	7,5	6
00	79	53	47	35	15	28	56	12	6
1 C	135	68	65	40	15	28	61	12	6
1	135	72	65	40	20	46	65	14	6

Time current characteristics I/t

NH00C & NH00

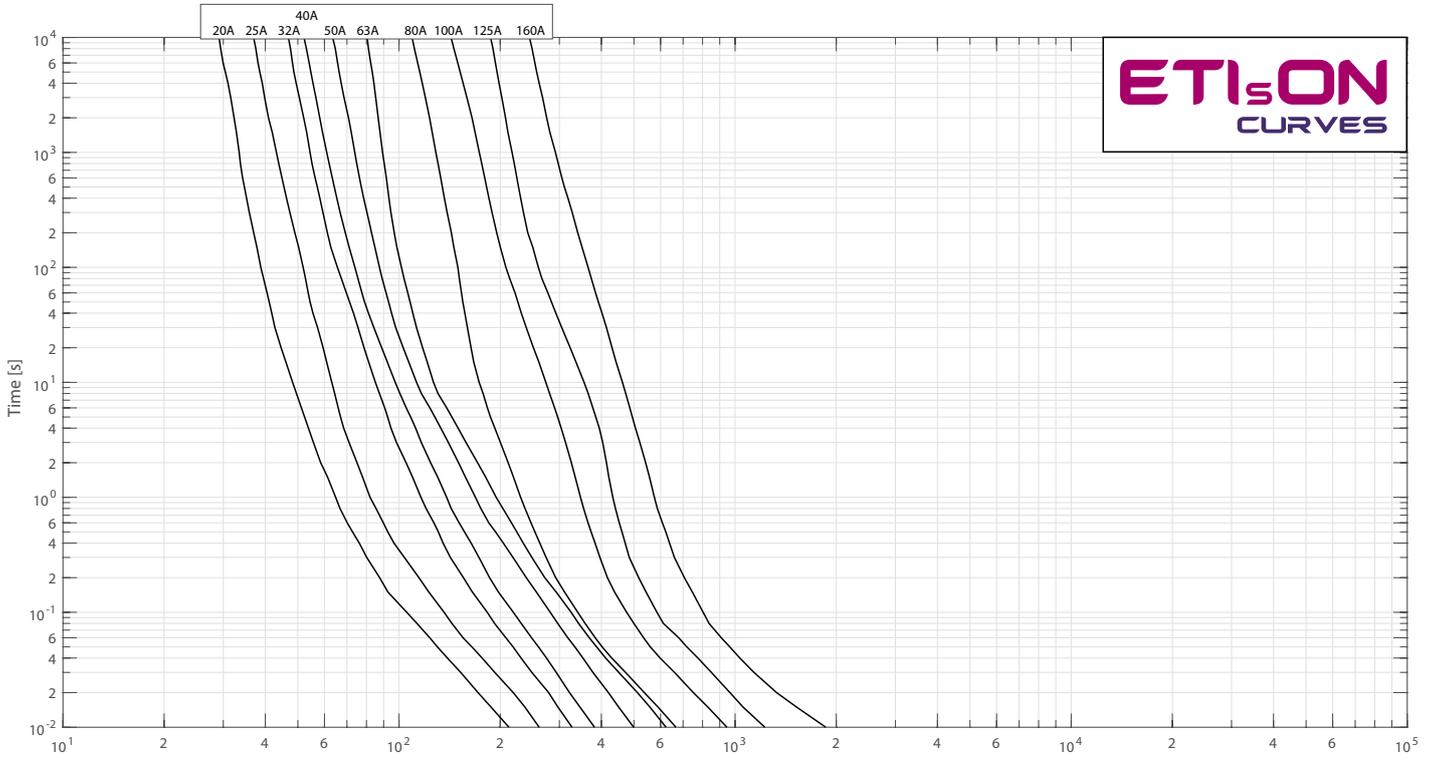

NH1C & NH1

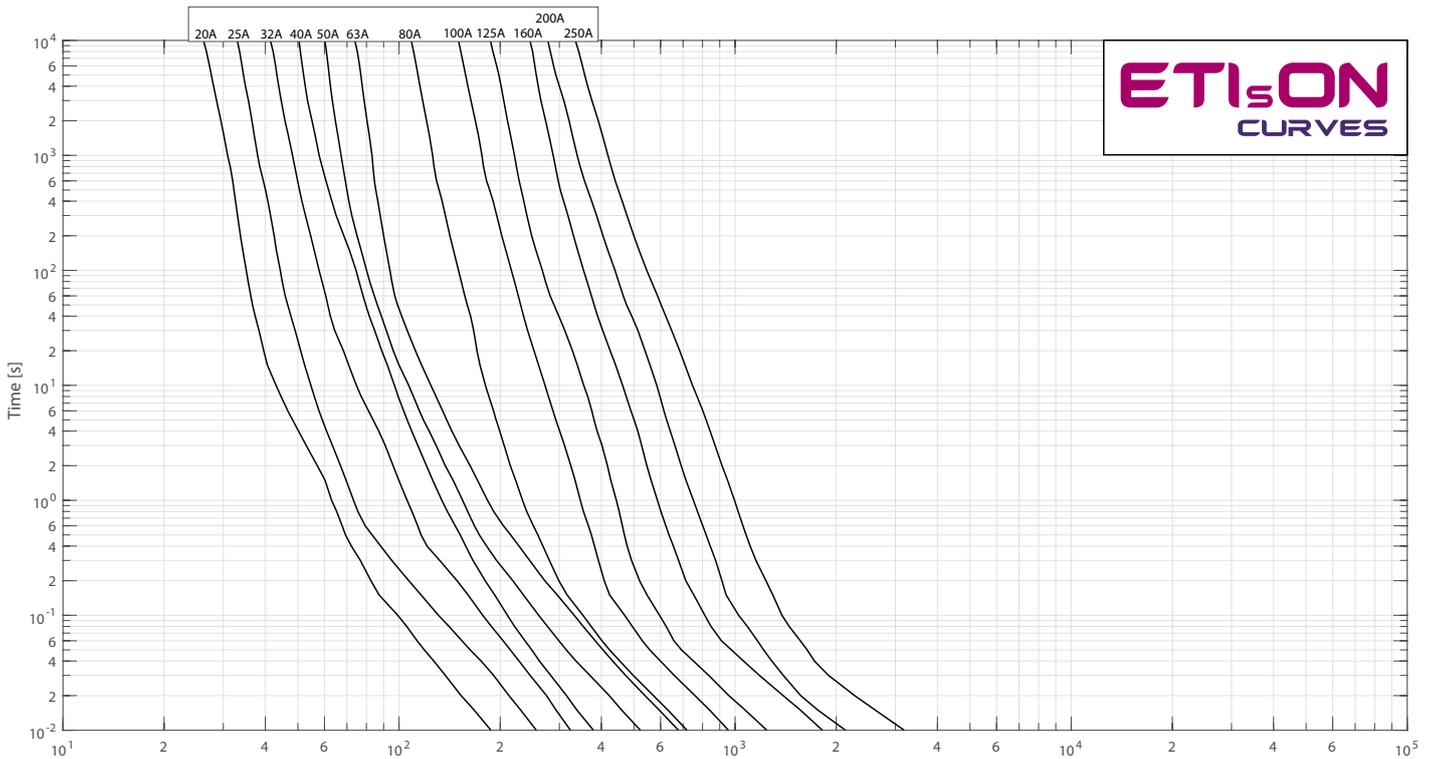

NH gBat fuse-link 440V d.c.


General characteristics

Rated voltage	440V d.c., L/R=10ms
Breaking capacity	30kA d.c.
Standard	IEC 60269-7
Application	Battery protection



NH gBat fuse-link 440 V d.c.


Size	I_n [A]	Standard indicator	Power dissipation [W]	Power dissipation $0,7 \times I_n$ [W]	Pre-arcing Joule integral L/R=10ms [A ² s]	Operating Joule integral L/R=10ms [A ² s]	For use with		
1C pic. 2	20	004723103	6,3	2,8	360	648	PK1 004123100	233	3/45
	25	004723104	7,3	3,3	710	1.278			
	32	004723105	9	4	920	1.656			
	40	004723106	11,2	5	1.440	2.592			
	50	004723107	14,5	6,5	2.820	5.076			
	63	004723108	16,8	7,5	4.160	7.488			
	80	004723109	11,4	5,1	4.670	8.406			
	100	004723110	12	5,4	9.360	16.848			
	125	004723111	14,8	6,6	14.750	26.550			
	160	004723112	17,6	7,9	27.880	50.184			

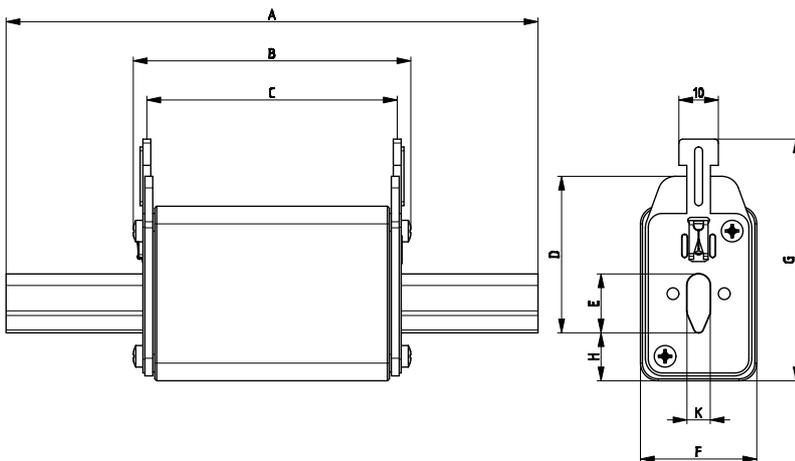


	A	B	C	D	E	F	G	H	K
1C	135	68	65	40	15	28	61	12	6



Time current characteristics I/t

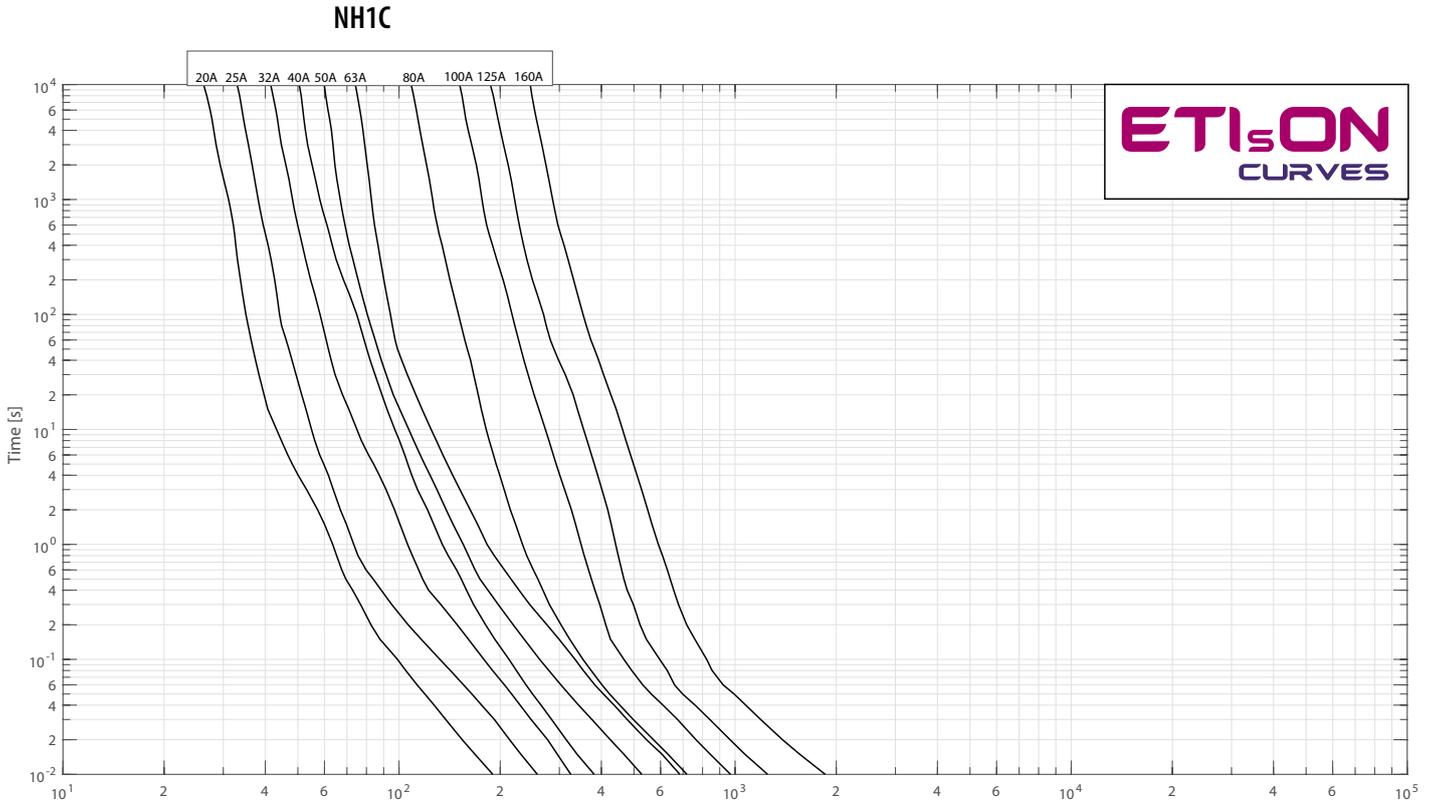

Application

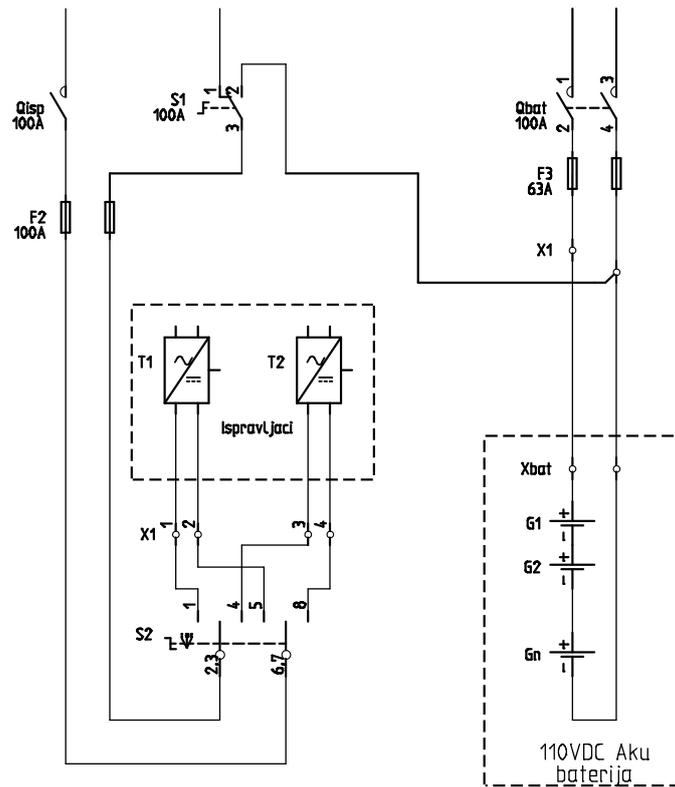

NH gBat fuse-link 550V d.c.



General characteristics

Rated voltage	550V d.c. (L/R=3ms)
Breaking capacity	30kA d.c.
Standard	IEC 60269-7
Application	Battery protection




NH gBat fuse-link 550 V d.c.

Size	I_n [A]	Standard indicator	Power dissipation [W]	Power dissipation $0,7 \times I_n$ [W]	Pre-arcing Joule integral L/R=3ms [A ² s]	Operating Joule integral L/R=3ms [A ² s]	For use with		
00	32	004110209	7,0	2,9	500	2.000	PK00 004123001	190	3/90
	40	004110219	7,3	3,1	1.000	3.000			
	50	004110218	11,5	4,8	1.700	5.300			
	63	004110217	11,8	4,9	3.000	9.200			
	80	004110216	9,8	4,1	3.100	12.000			
	100	004110215	11,8	4,9	4.500	20.000			



	A	B	C	D	E	F	G	H	K
00	79	53	47	35	15	28	56	12	6

Time current characteristics I/t

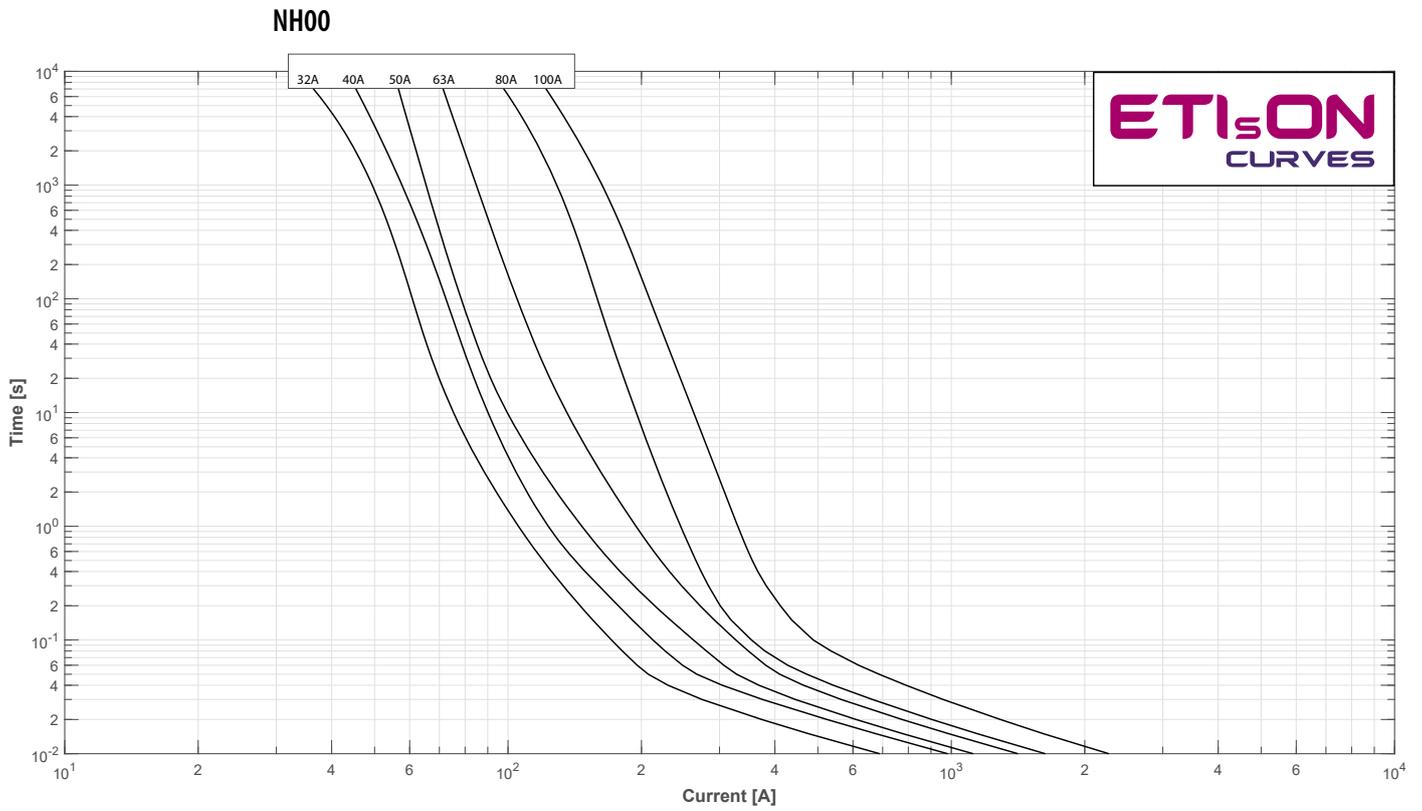

NH gBat fuse-link 550 V d.c.

Size	I_n [A]	Standard indicator pic. 1	Striker indicator pic. 2	Standard indicator S_{110mm} pic. 3	Power dissipation [W]	Power dissipation $0,7 \times I_n$ [W]	Prearcing Joule integral L/R=3ms [A ² s]	Operating Joule integral L/R=3ms [A ² s]	For use with		
1	40	004723259	004723279	004723269	6	2,7	250	833	PK1DC 004122025	420	3/24
	50	004723260	004723280	004723270	7	3,1	449	1.495			
	63	004723261	004723281	004723271	9	4	700	2.331			
	80	004723262	004723282	004723272	12	5,4	1.200	3.996			
	100	004723263	004723283	004723273	15	6,7	1.650	5.495			
	125	004723264	004723284	004723274	20	9	2.200	7.326			
	160	004723265	004723285	004723275	26	11,7	4.300	14.319			
	200	004723266	004723286	004723276	32	14,4	8.500	28.305			
	224	004723267	004723287	004723277	37	16,6	10.000	33.300			
	250	004723268	004723288	004723278	43	19,3	15.000	50.000			
2	125	004724260	004724280	004724270	20	9	2.200	10.296	PK2DC 004122024	660	3/24
	160	004724261	004724281	004724271	26	11,7	4.300	20.124			
	200	004724262	004724282	004724272	32	14,4	8.500	39.780			
	224	004724263	004724283	004724273	37	16,6	10.000	46.800			
	250	004724264	004724284	004724274	43	19,3	15.000	70.200			
	315	004724265	004724285	004724275	57	26,6	20.000	93.600			
	350	004724266	004724286	004724276	67	30	28.000	131.040			
3	250	004725260	004725280	004725270	43	19,3	15.000	65.550	PK3DC 004122023	870	3/24
	315	004725261	004725281	004725271	57	26,6	20.000	87.400			
	350	004725262	004725282	004725272	67	30	28.000	122.360			
	400	004725263	004725283	004725273	76	34,2	32.000	139.840			
	425	004725264	004725284	004725274	84	37,8	40.000	174.800			
	500	004725265	004725285	004725275	110	49,5	44.000	192.280			
	630	004725266	004725286	004725276	160	72	80.000	350.000			



NH gBat fuse-link 700V d.c.

General characteristics

Rated voltage	700V d.c. (L/R=3ms)
Breaking capacity	30kA d.c.
Standard	IEC 60269-7
Application	Battery protection



NH gBat fuse-link 700 V d.c.

Size	I_n [A]	Standard indicator pic. 1	Striker indicator pic. 2	Standard indicator S_{110mm} pic. 3	Power dissipation [W]	Power dissipation $0,7 \times I_n$ [W]	Pre-arcing Joule integral L/R=3ms [A ² s]	Operating Joule integral L/R=3ms [A ² s]	For use with		
1	40	004723289	004723309	004723299	6	2,7	250	1.000	PK1DC 004122025	420	3/24
	50	004723290	004723310	004723300	7	3,1	449	1.796			
	63	004723291	004723311	004723301	9	4	700	2.800			
	80	004723292	004723312	004723302	12	5,4	1.200	4.800			
	100	004723293	004723313	004723303	15	6,7	1.650	6.600			
	125	004723294	004723314	004723304	20	9	2.200	8.800			
	160	004723295	004723315	004723305	26	11,7	4.300	17.200			
	200	004723296	004723316	004723306	32	14,4	8.500	34.000			
	224	004723297	004723317	004723307	37	16,6	10.000	40.000			
250	004723298	004723318	004723308	43	19,3	15.000	60.000				
2	125	004724290	004724310	004724300	20	9	2.200	11.682	PK2DC 004122024	660	3/24
	160	004724291	004724311	004724301	26	11,7	4.300	22.833			
	200	004724292	004724312	004724302	32	14,4	8.500	45.135			
	224	004724293	004724313	004724303	37	16,6	10.000	53.100			
	250	004724294	004724314	004724304	43	19,3	15.000	79.650			
	315	004724295	004724315	004724305	57	26,6	20.000	106.200			
	350	004724296	004724316	004724306	67	30	28.000	148.680			
400	004724297	004724317	004724307	76	34,2	32.000	170.000				
3	250	004725290	004725304	004725297	43	19,3	15.000	75.000	PK3DC 004122023	870	3/24
	315	004725291	004725305	004725298	57	26,6	20.000	100.000			
	350	004725292	004725306	004725299	67	30	28.000	140.000			
	400	004725293	004725307	004725300	76	34,2	32.000	160.000			
	425	004725294	004725308	004725301	84	37,8	40.000	200.000			
	500	004725295	004725309	004725302	110	49,5	44.000	220.000			
630	004725296	004725310	004725303	160	72	80.000	400.000				



NH gBat fuse-link 800V d.c.

General characteristics

Rated voltage	800V d.c. (L/R=3ms)
Breaking capacity	30kA d.c.
Standard	IEC 60269-7
Application	Battery protection
Fuse base	NH1: 004122025 PK1DC NH2: 004122024 PK2DC NH3L: 004132023 PK3L 1500V





NH gBat fuse-link 800 V d.c.



Size	I_n [A]	Standard indicator pic. 1	Striker indicator pic. 2	Standard indicator S_{110mm} pic. 3	Power dissipation [W]	Power dissipation $0,7 \times I_n$ [W]	Pre-arcing Joule integral L/R=3ms [A ² s]	Operating Joule integral L/R=3ms [A ² s]		
1	40	004723320	004723330	004723340	6	2,7	250	1.750	420	3/24
	50	004723321	004723331	004723341	7	3,1	449	3.143		
	63	004723322	004723332	004723342	9	4	700	4.900		
	80	004723323	004723333	004723343	12	5,4	1.200	8.400		
	100	004723324	004723334	004723344	15	6,7	1.650	11.550		
	125	004723325	004723335	004723345	20	9	2.200	15.400		
	160	004723326	004723336	004723346	26	11,7	4.300	30.100		
	200	004723327	004723337	004723347	32	14,4	8.500	60.000		
2	125	004724320	004724330	004724340	20	9	2.200	13.046	660	3/24
	160	004724321	004724331	004724341	26	11,7	4.300	25.499		
	200	004724322	004724332	004724342	32	14,4	8.500	50.405		
	224	004724323	004724333	004724343	37	16,6	10.000	59.300		
	250	004724324	004724334	004724344	43	19,3	15.000	88.950		
	315	004724325	004724335	004724345	57	26,6	20.000	118.600		
	350	004724326	004724336	004724346	67	30	28.000	166.040		
3L*	500	004110350	-	-	112	50	150.000	300.000	1970	1/10



pic.1

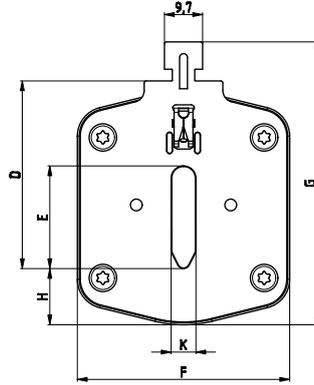
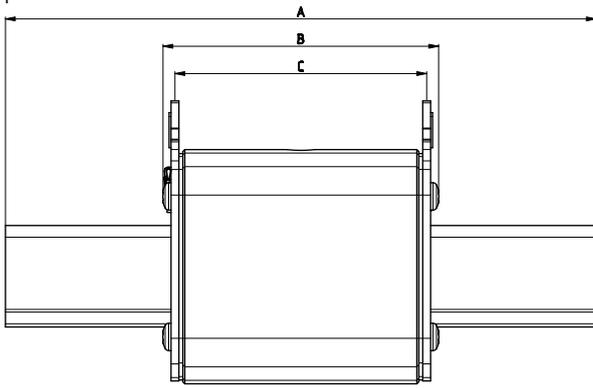


pic.2

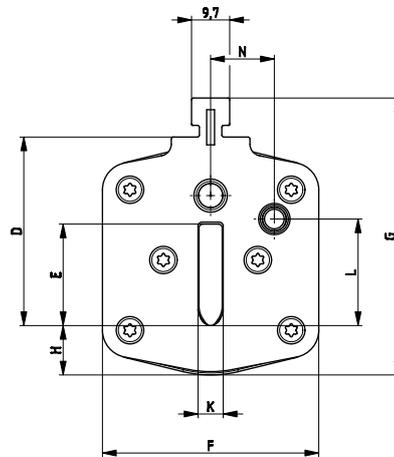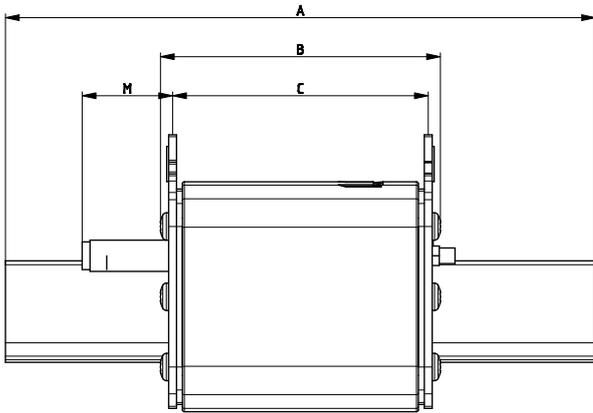

Size	A	B	C	D	E	F	G	H	K	L	M	N
1	135	73	65	40	24	46	62	12	6	20,5	27,5	13,7
2	150	73	65	48	30	54	71	13	6	27,3	27,5	16,2
3	150	73	65	60	37	64	84	14	6	35,6	27,5	17


pic.3

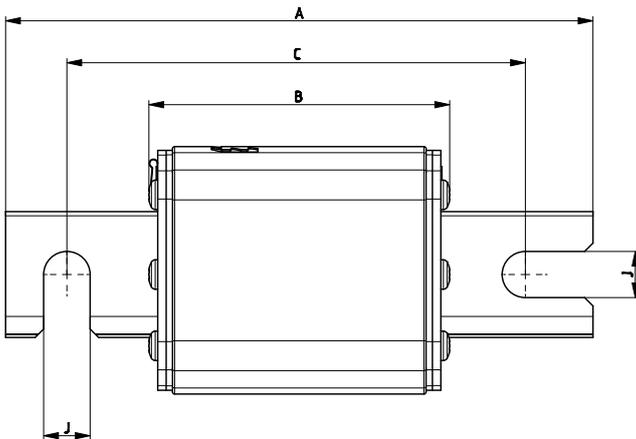


Size	A	B	C	E	F	G	H	J	K
1	140	72	110	24	46	51	12	11	6
2	140	72	110	30	54	59	13	11	6
3	140	72	110	37	64	70	14	11	6

Time current characteristics I/t


NH1 550V, 700V, 800V

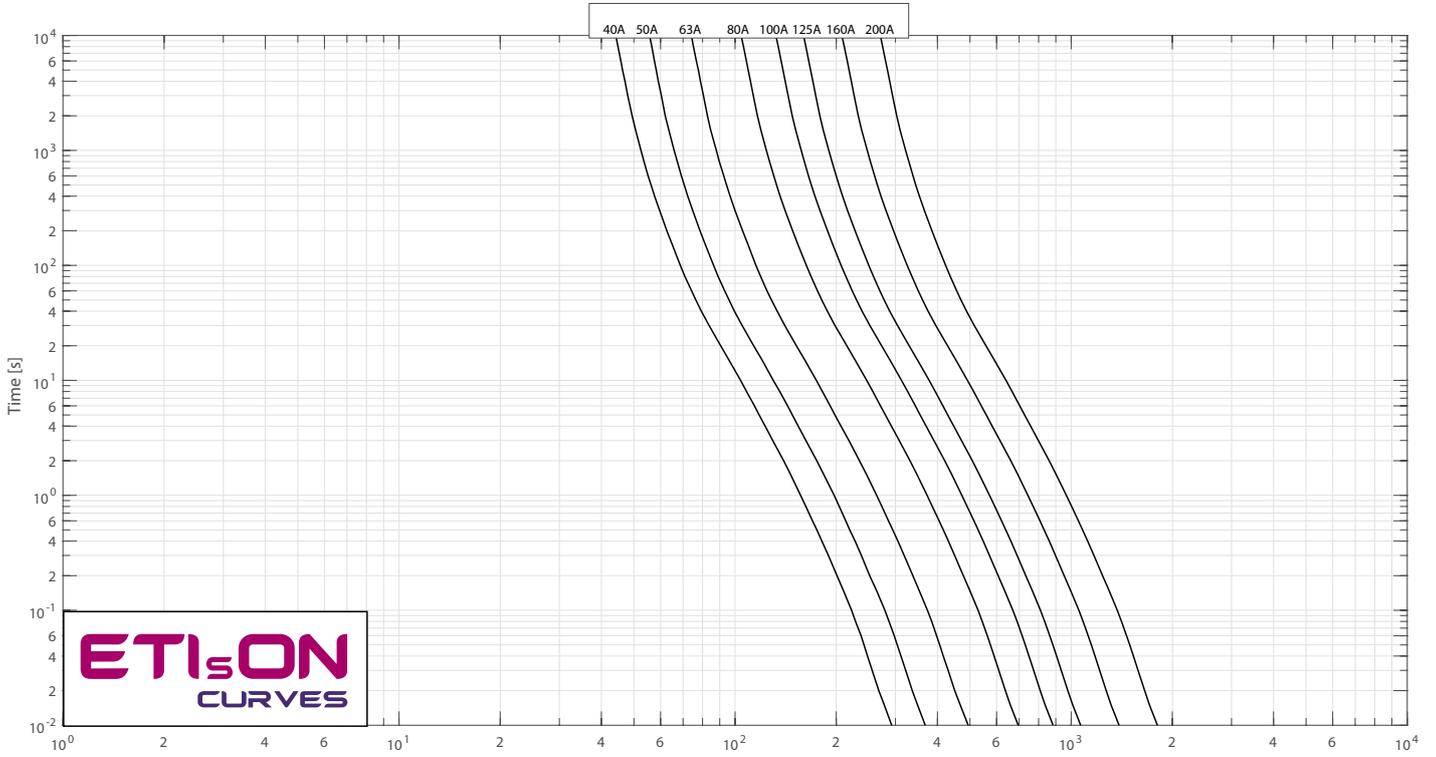


NH2 550V, 700V, 800V

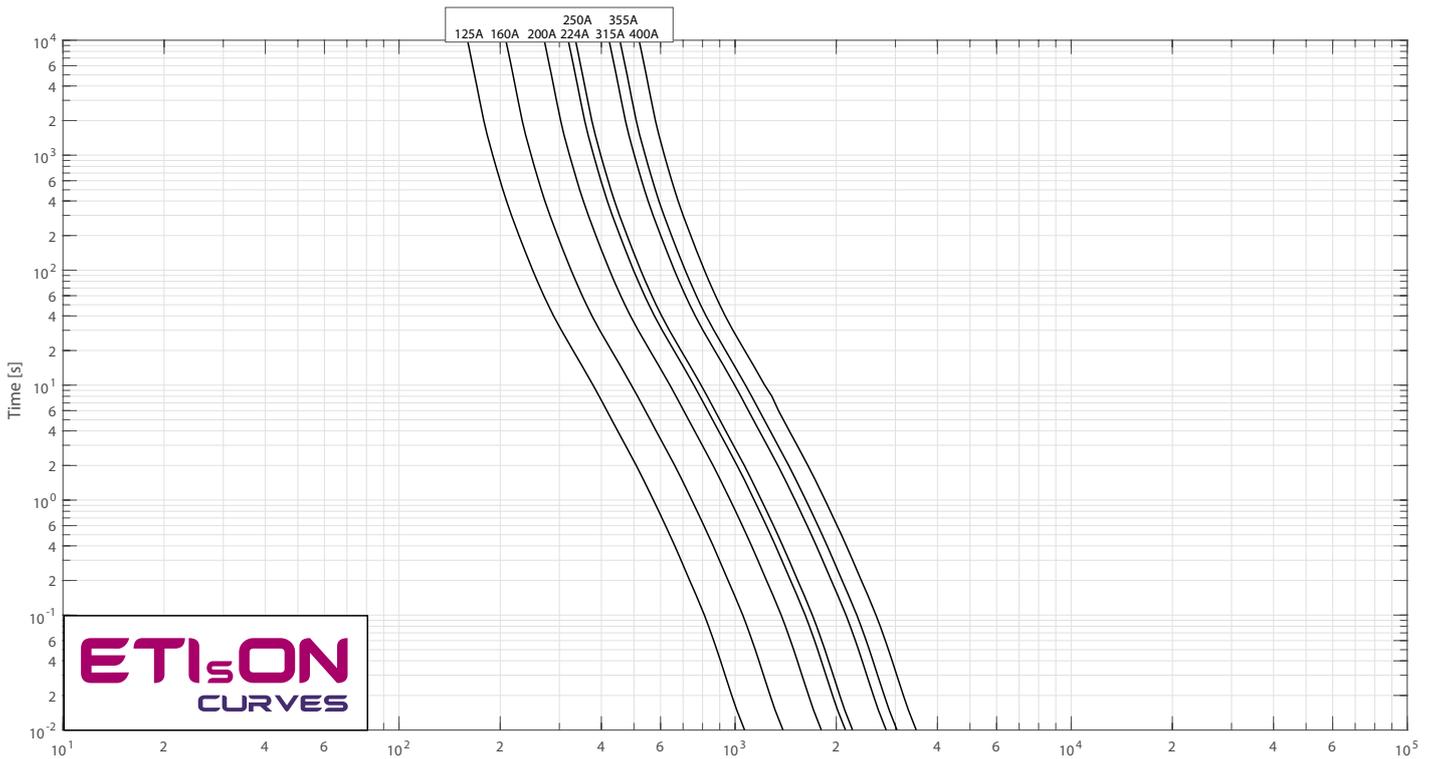

NH3 550V, 700V

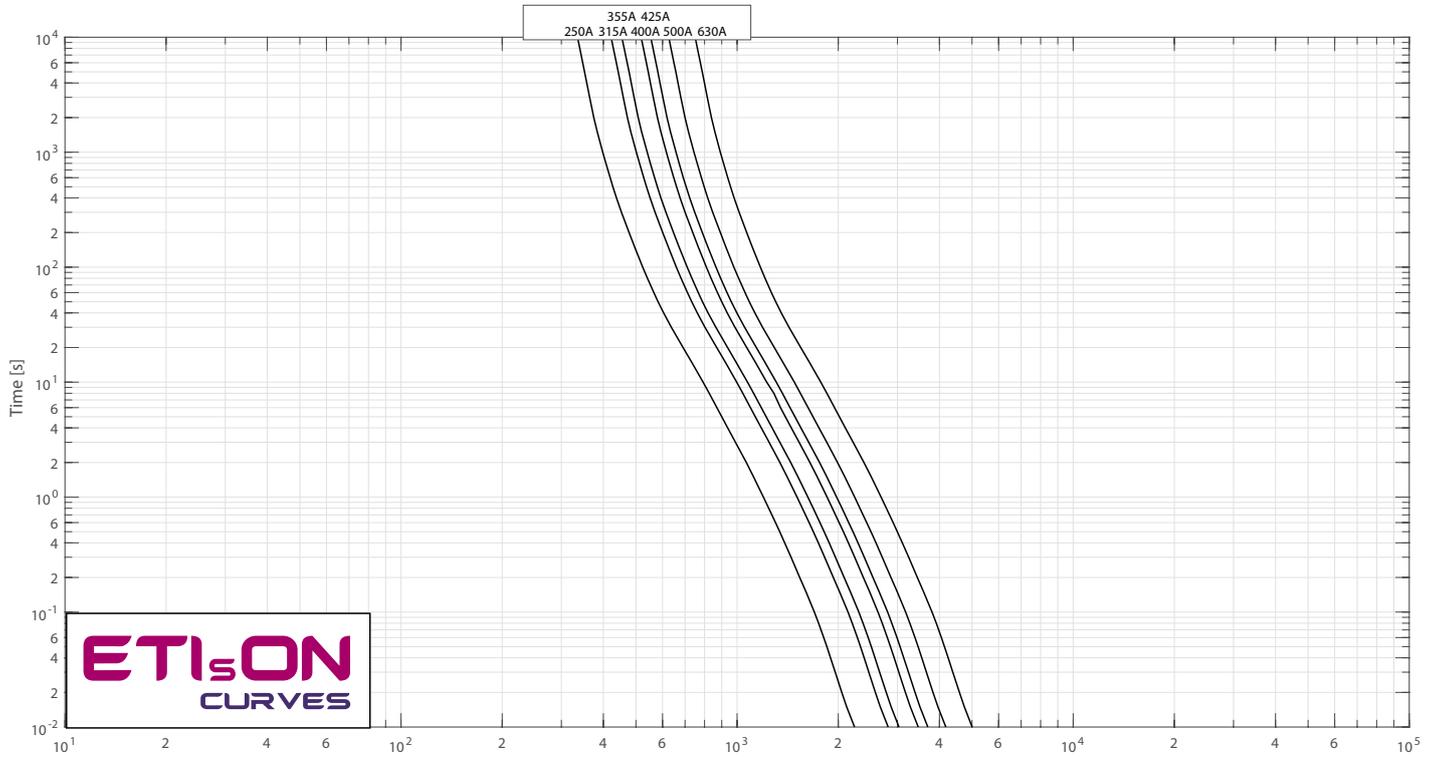


pic. 4

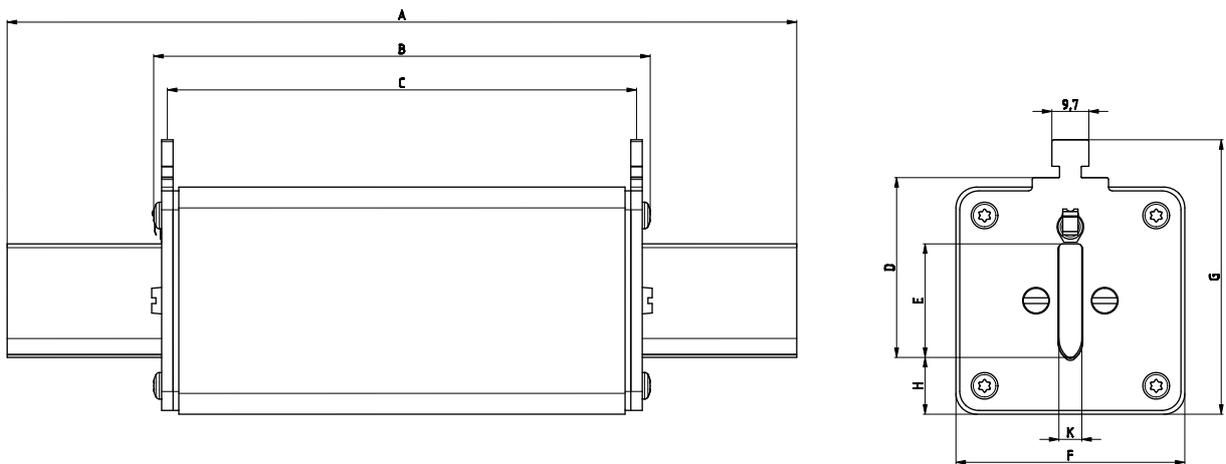

	A	B	C	D	E	F	G	H	K
3L	208	130	126	60	37	73	87	18	6




Time current characteristics I/t

NH3L 800V

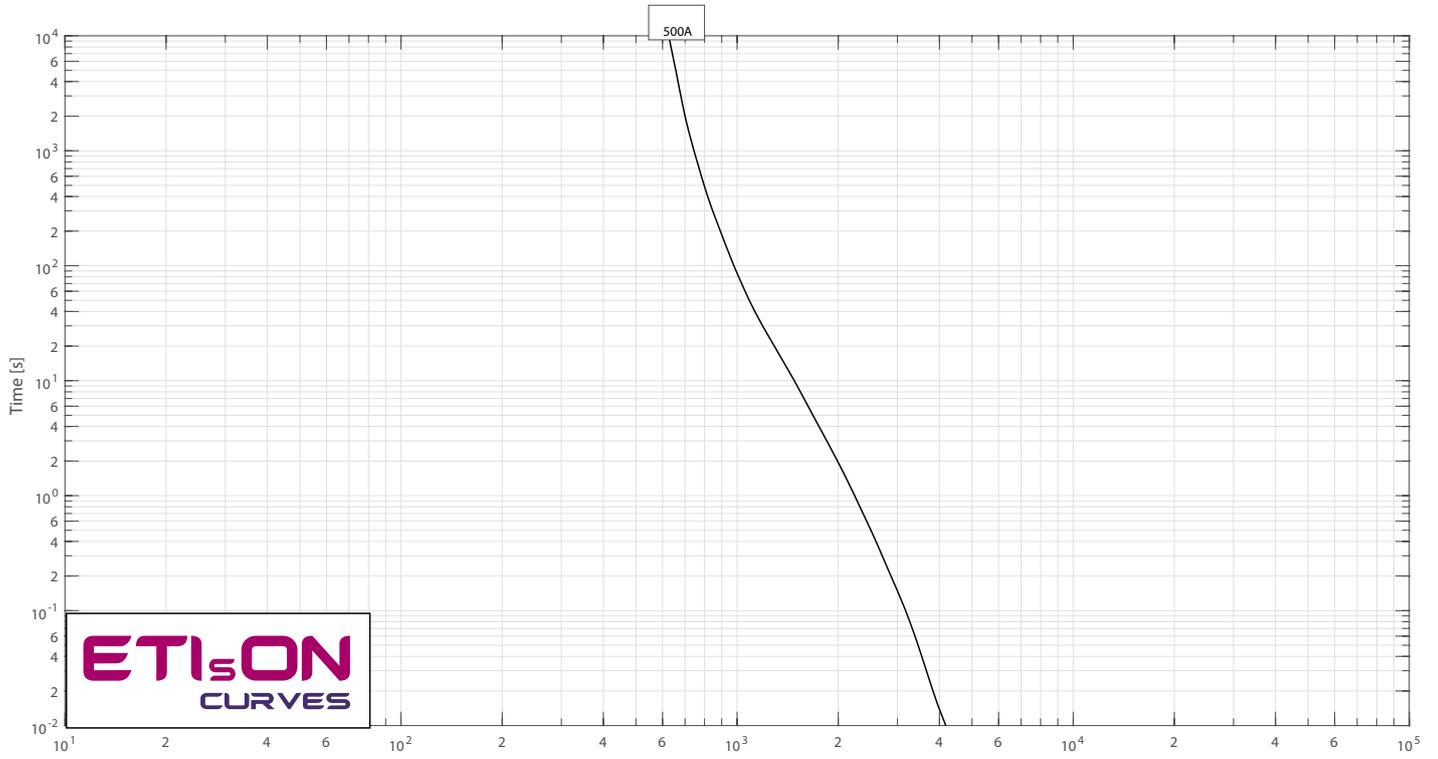

ETISON
CURVES

Battery fuse NH1,2,3 550V, 700V, 800V d.c.-current loading derating factor in disconnectors

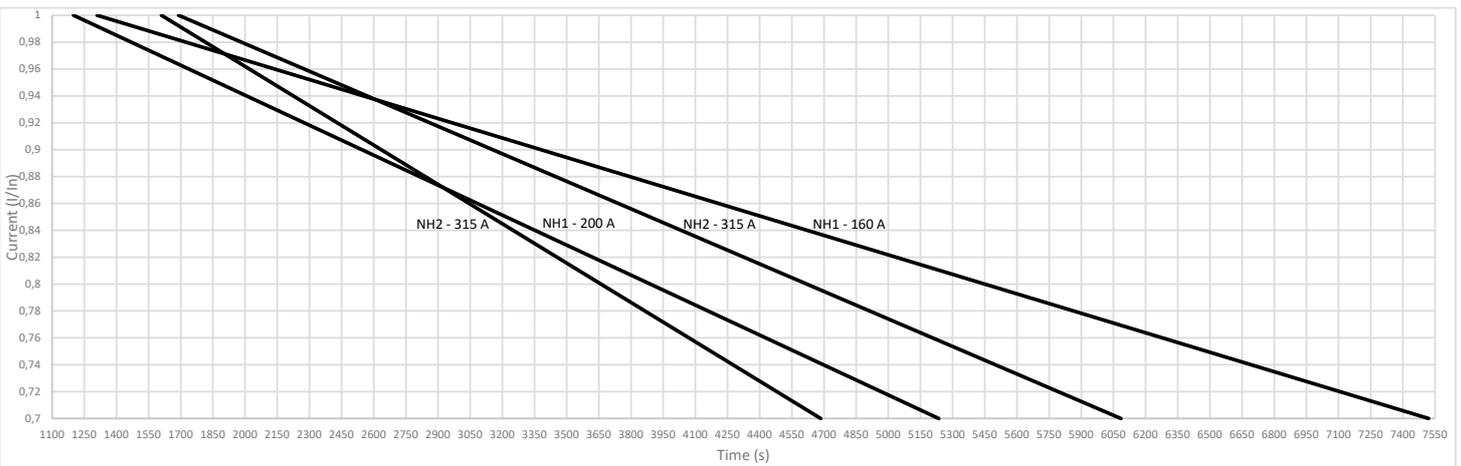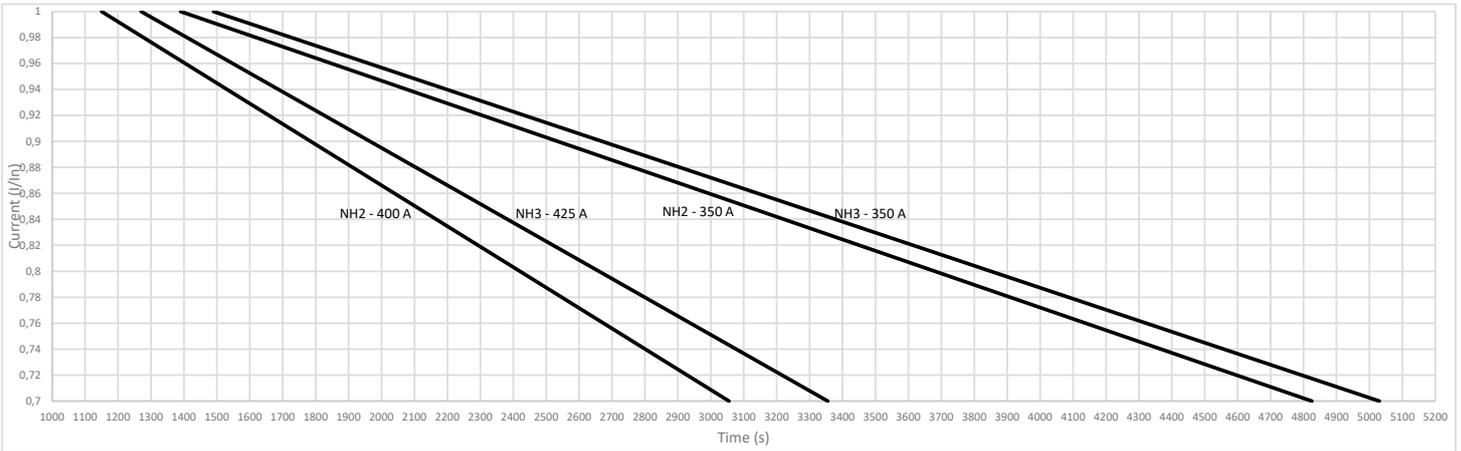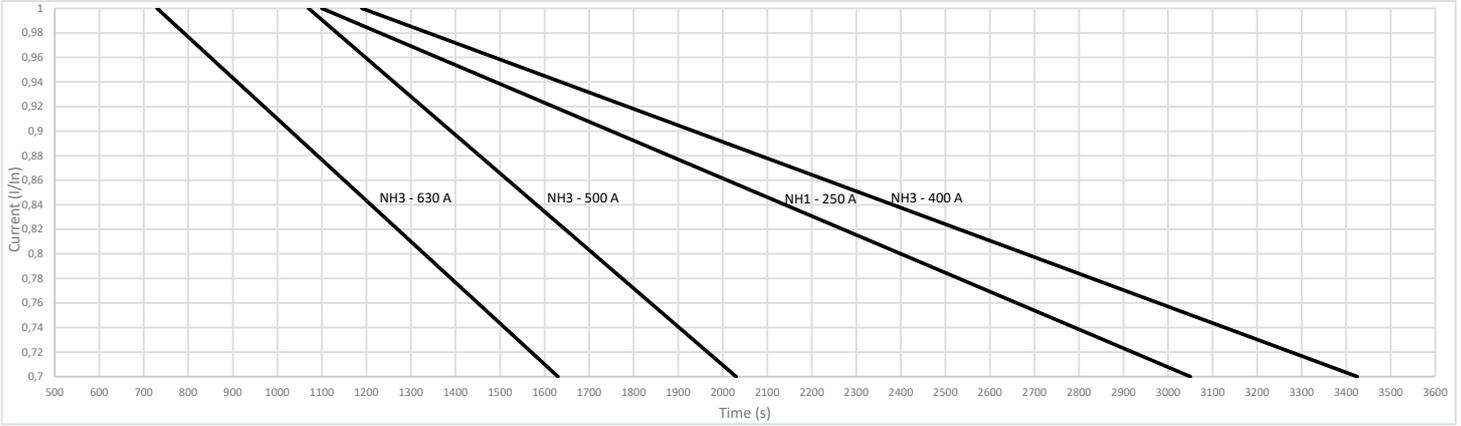

NH gBat fuse-link 1000V d.c.

General characteristics


Rated voltage	1000V d.c. (L/R=1ms)
Breaking capacity	30kA d.c.
Characteristic	gBat
Standard	IEC 60269-7
Application	Fuse-link for battery protection.




NH gBat fuse-link 1000V d.c.

Size	I_n	Standard indicator	S_{110} screw contact	U_{110} screw contact	G screw contact with centre trip indicator for microswitch MK	Power dissipation	Power dissipation $0,7 \times I_n$	Pre-arcing Joule integral	Operating Joule integral					
	[A]					[W]	[W]	[A ² s]	[A ² s]	g				
00/90	32	004110950	/	/	/	8,8	3,8	52	430	300	3/45			
	40	004110951	/	/	/	10,3	4,3	96	730					
	50	004110952	/	/	/	14,1	5,7	155	920					
	63	004110953	/	/	/	15,8	6,4	290	1.760					
	80	004110954	/	/	/	17,1	7,0	520	3.160					
	100	004110955	/	/	/	19,5	8,1	1.110	5.280					
	125	004110956	/	/	/	19,0	7,9	2.800	11.340					
0	160	004110957	/	/	/	26,1	10,5	5.950	20.750	280	3/45			
	32	004110960	/	/	/	8,8	3,8	52	430					
	40	004110961	/	/	/	10,3	4,3	96	730					
	50	004110962	/	/	/	14,1	5,7	155	920					
	63	004110963	/	/	/	15,8	6,4	290	1.760					
	80	004110964	/	/	/	17,1	7,0	520	3.160					
	100	004110965	/	/	/	19,5	8,1	1.110	5.280					
1C	125	004110966	/	/	/	19,0	7,9	2.800	11.340	300	3/45			
	160	004110967	/	/	/	26,1	10,5	5.950	20.750					
	32	004110970	/	/	/	8,8	3,8	52	430					
	40	004110971	/	/	/	10,3	4,3	96	730					
	50	004110972	/	/	/	14,1	5,7	155	920					
	63	004110973	/	/	/	15,8	6,4	290	1.760					
	80	004110974	/	/	/	17,1	7,0	520	3.160					
1	100	004110975	/	/	/	19,5	8,1	1.110	5.280	500	3/24			
	125	004110976	/	/	/	19,0	7,9	2.800	11.340					
	160	004110977	/	/	/	26,1	10,5	5.950	20.750					
	200	004110760	/	/	/	27	11	4.400	29.000					
	2	200	004110761	004110769	004110774	004110755	26	11	4.400			29.000	650	1/16 (G type 2/32)
		250	004110762	004110770	004110775	004110756	36	15	6.000			38.000		
	3	160	004110763	/	/	/	38	15	5.000			10.000	1200	3/15 (G type 2/9)
200		004110764	/	/	/	45	18	10.000	20.000					
250		004110765	/	/	/	44	18	20.000	40.000					
315		004110766	004110771	004110776	004110757	54	24	40.000	80.000					
350		004110767	004110772	004110777	004110758	55	25	45.000	90.000					
400		004110768	004110773	004110778	004110759	58	24	46.000	138.000					


Standard indicator

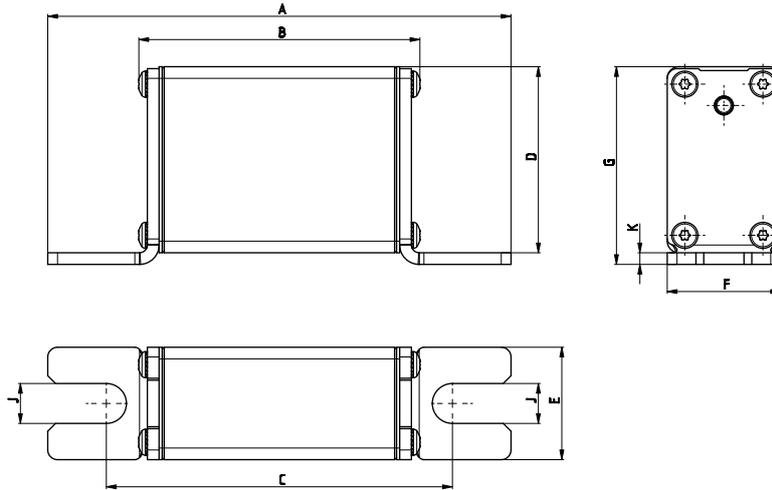

Size	A	B	C	D	E	F	G	K	J
00/90	119	72	92	48	29	29	51	3	10

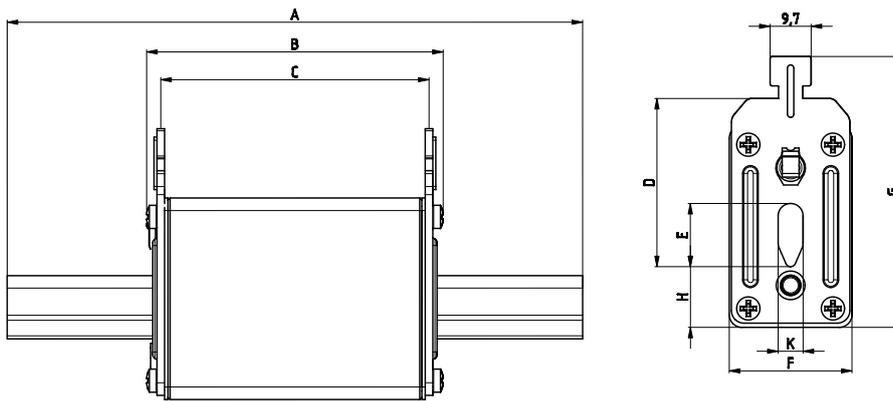


Size	A	B	C	D	E	F	G	H	K
0	125	72	66	35	15	30	60	15	6
1C	135	72	66	40	15	30	65	15	6

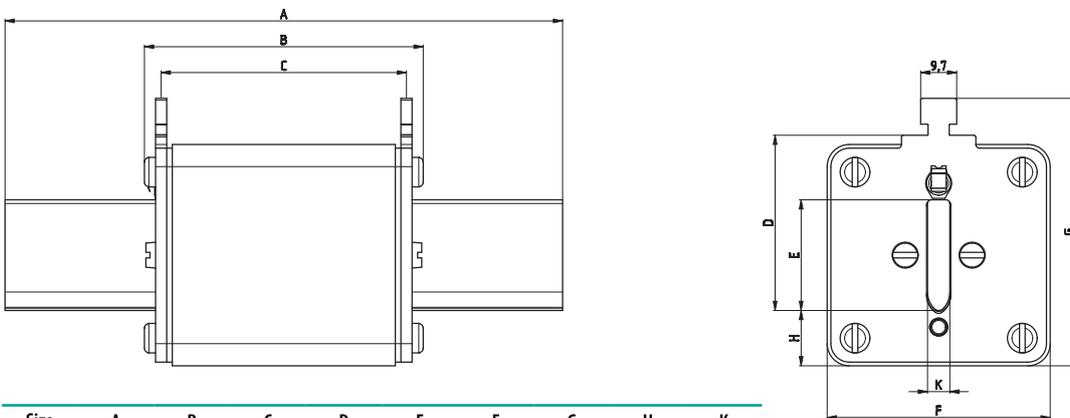


Size	A	B	C	D	E	F	G	H	K
1	135	74	70	42	24	51	67	13,5	6
2	150	74	70	48	30	61	71	15	6
3	150	74	70	60	37	73	87	18	6


S₁₁₀ screw contact

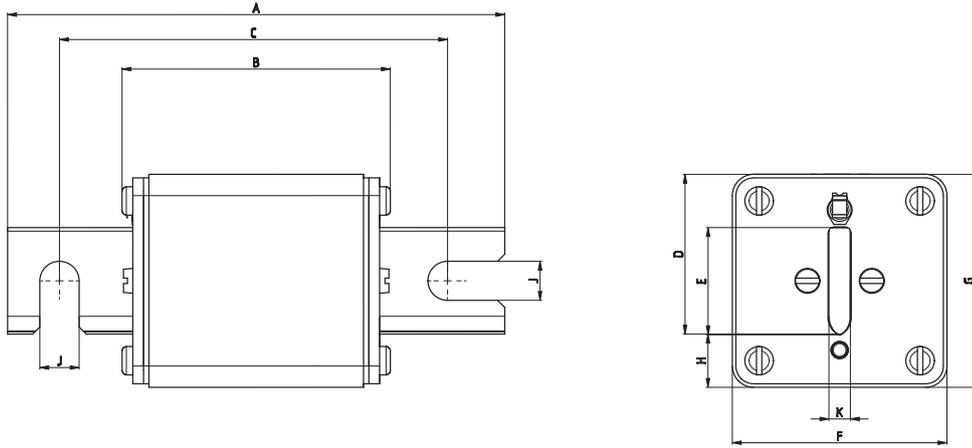


U₁₁₀ screw contact

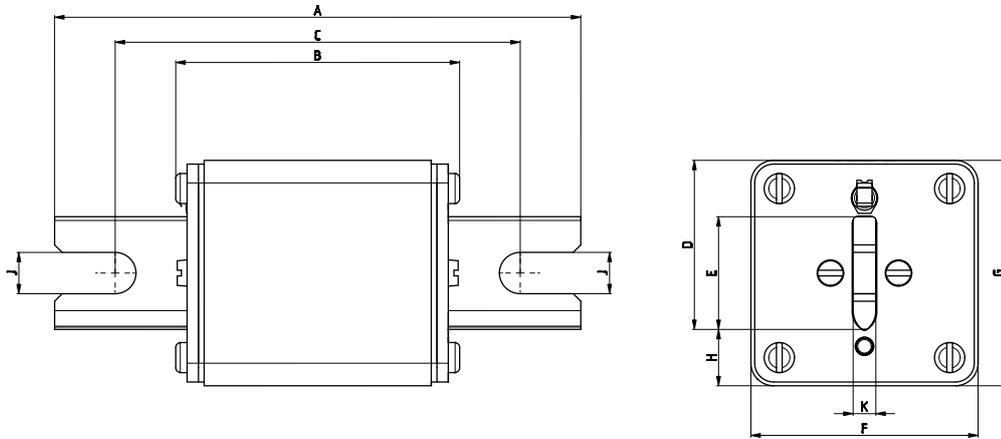

Size	A	B	C	D	E	F	G	H	K	J - NHS	J - NHU
2S,U	140	73	110	45	30	60	60	15	6	11	13
3S,U	140	73	110	55	37	73	73	18	6	11	13

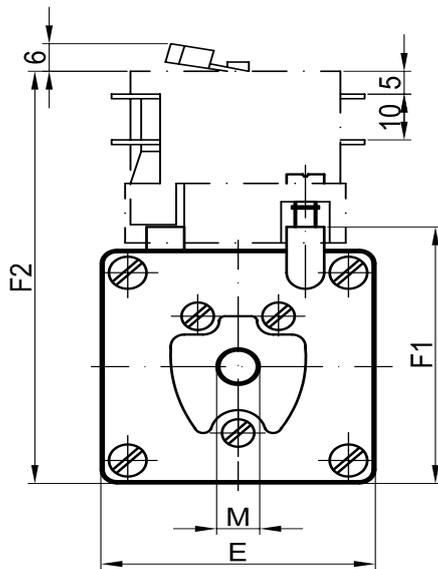


G screw contact

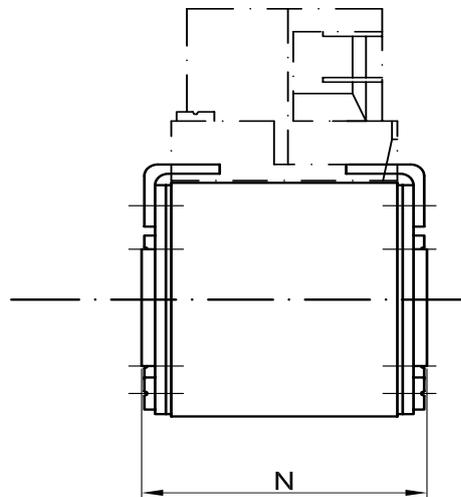


Size	D	E	F1	F2	M	N
2	60	60	65	99	M10	75
3	75	75	80	114	M12	75

Time current characteristics I/t

NH0, 1C, 1 1000V

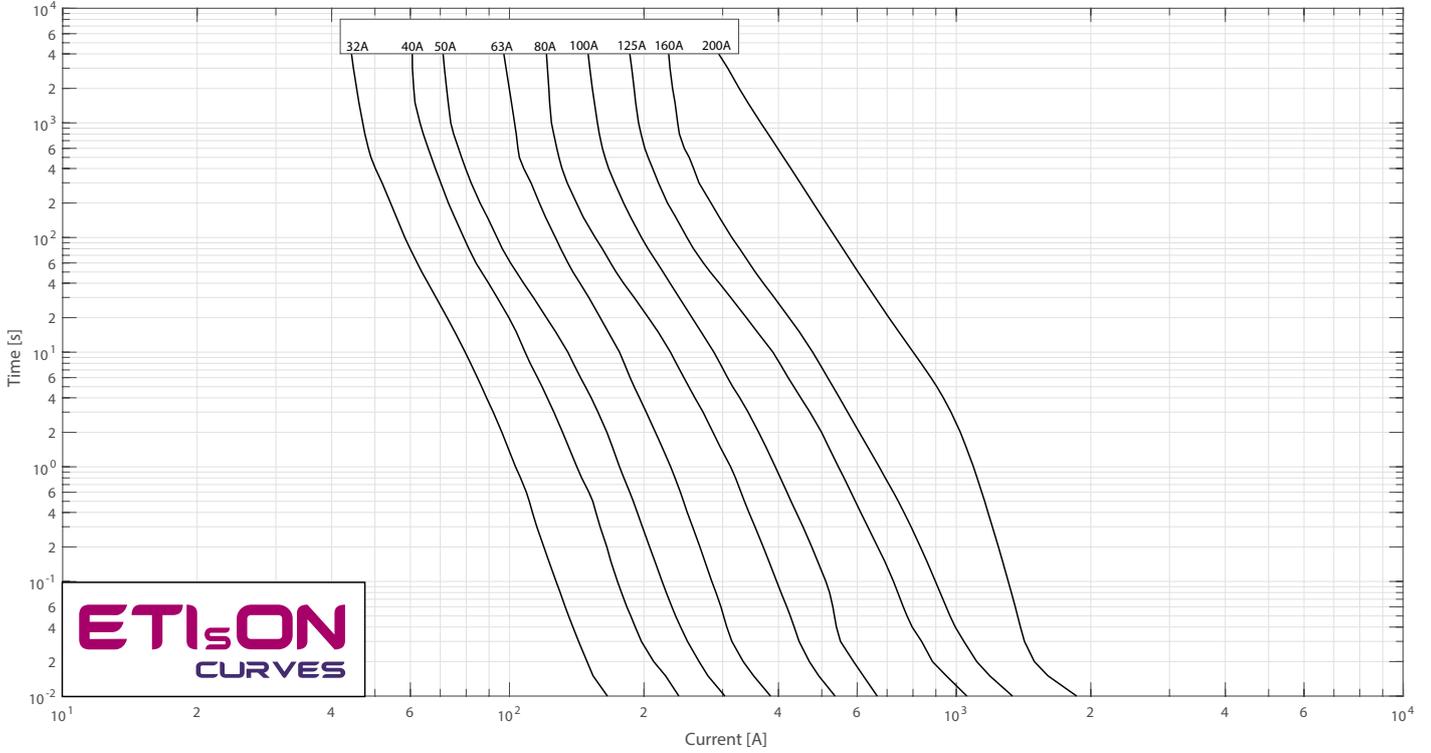


NH1 1000V

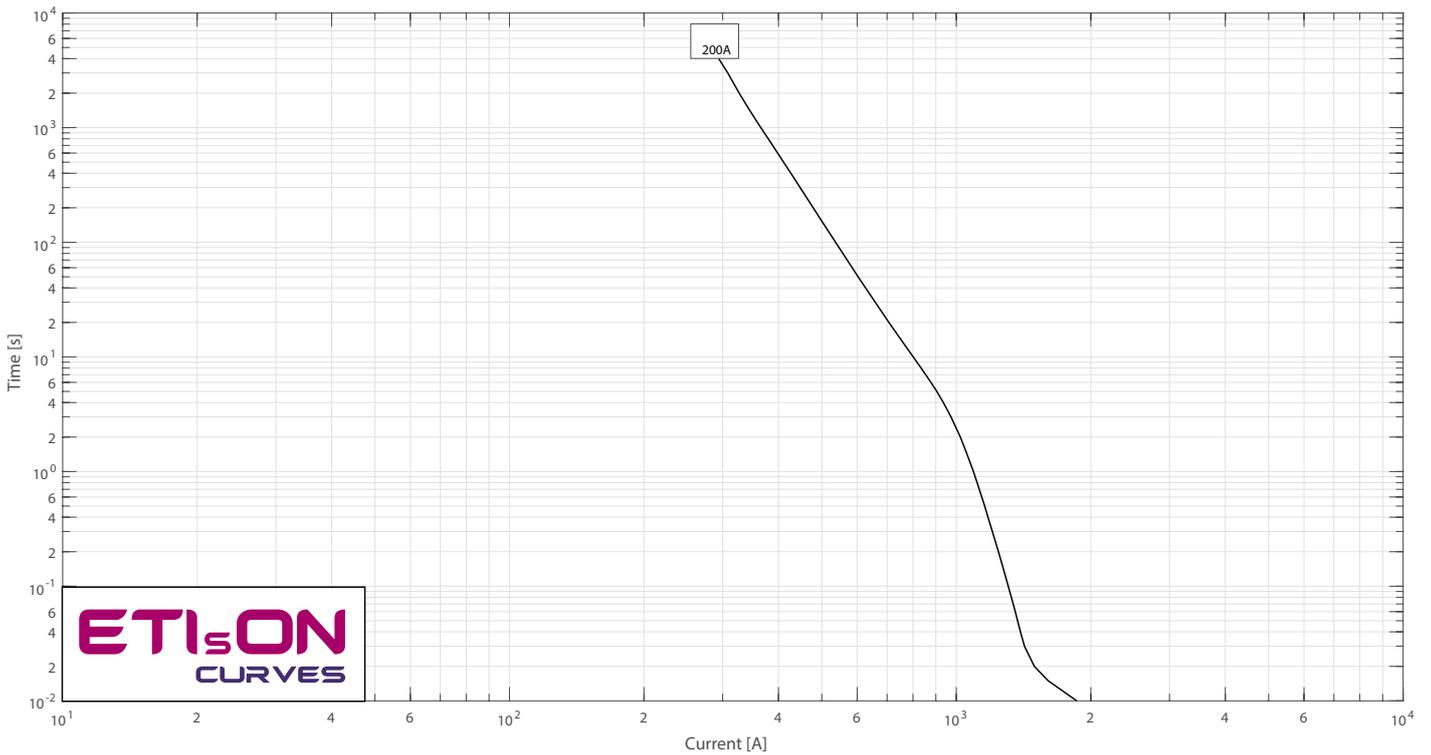




NH2 1000V

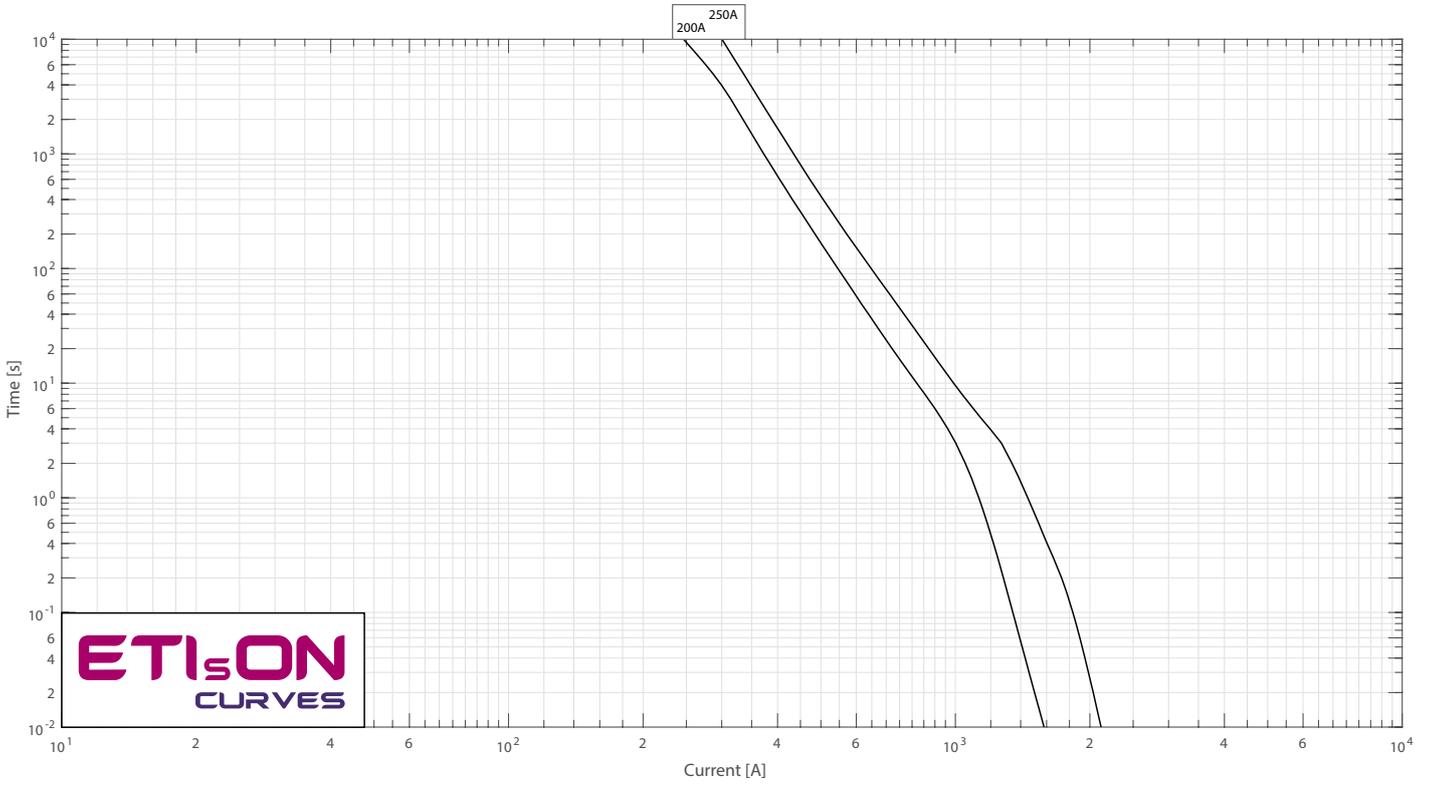

NH3 1000V

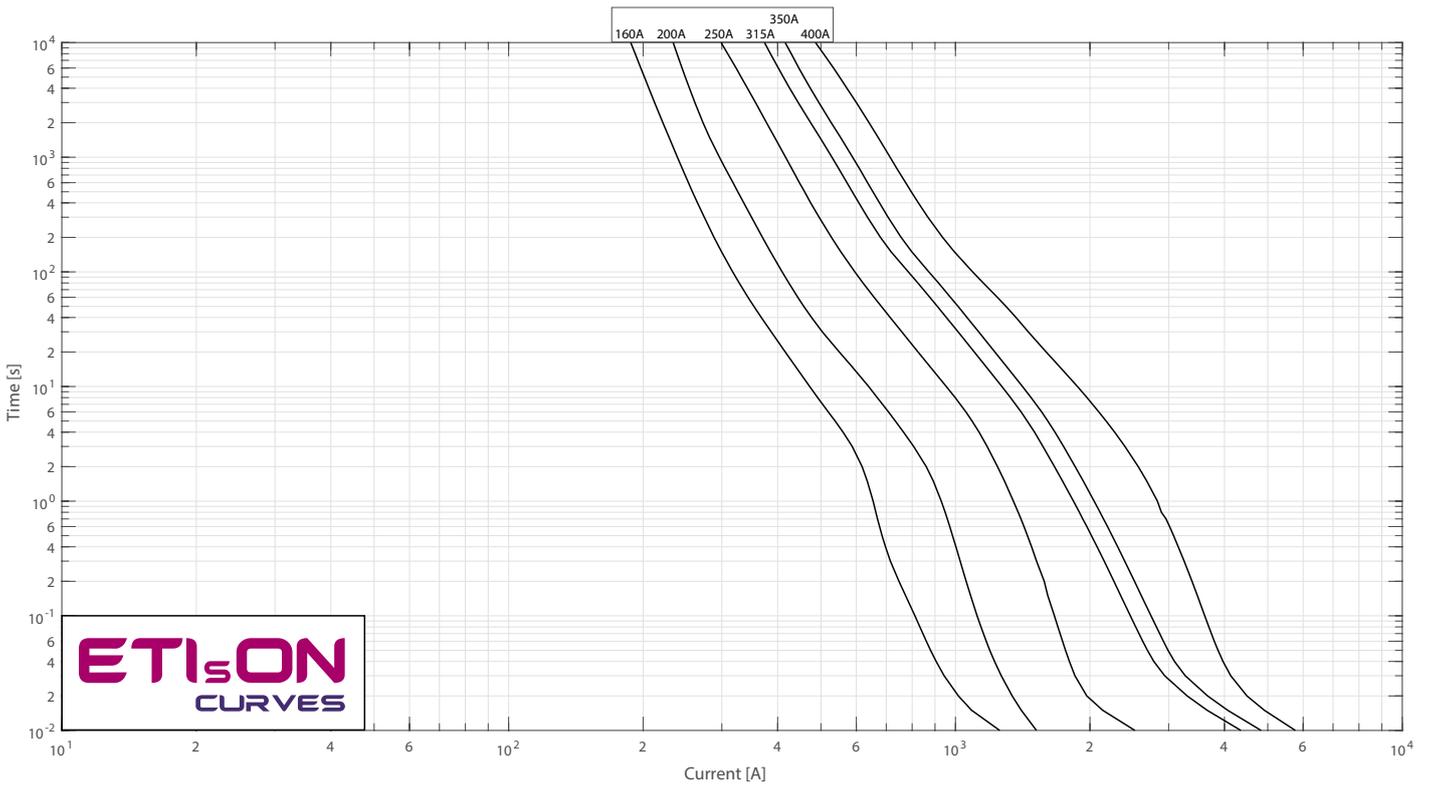

NH XL gBat fuse-link 1500V d.c.

General characteristics

Rated voltage	1500V d.c. (L/R=3ms)
Rated current	50 - 630A
Breaking capacity	100kA d.c.
Standard	IEC60269-7
Application	For battery protection. Applied in fuse base PK XL 1500V.




NH gBat fuse-link 1500V d.c.

Size	I_n [A]	Standard indicator	S_{170} screw contact	U_{170} screw contact	Power dissipation [W]	Power dissipation $0,7 \times I_n$ [W]	Pre-arcing Joule integral L/R=3ms [A ² s]	Operating Joule integral L/R=3ms [A ² s]	For use with		
01XL	50	004110698	004110782	004110788	18	7	1.100	6.500	PK1XL 1500V	450	3/30
	63	004110699	004110783	004110789	22	8,5	2.500	13.000			
	80	004110700	004110784	004110790	21	9	4.500	32.500			
	100	004110701	004110785	004110791	29	11	7.500	54.000			
	125	004110702	004110786	004110792	36	13	9.000	65.000			
	160	004110703	004110787	004110793	46	17	13.000	104.000			
1XL	50	004110650	004110657	004110664	14	6	1.000	8.000	PK1XL 1500V	950	1/15
	63	004110651	004110658	004110665	14	6,2	2.000	13.000			
	80	004110652	004110659	004110666	16	7	6.000	32.000			
	100	004110653	004110660	004110667	19	8,3	12.500	56.000			
	125	004110654	004110661	004110668	22	9,7	19.000	80.000			
	160	004110655	004110662	004110669	30	13,2	24.000	104.000			
2XL	200	004110671	004110673	004110675	36	15,9	50.000	165.000	PK2XL 1500V	1350	1/9
	250	004110672	004110674	004110676	44	19,3	90.000	286.000			
	315	004110677	004110682	004110687	57	22,2	60.000	350.000			
3L	350	004110678	004110683	004110688	61	23,7	70.000	400.000	PK3L 1500V	1970	1/9
	400	004110679	004110684	004110689	67	26,8	80.000	550.000			
	450	004110680	004110685	004110690	75	29	120.000	700.000			
	500	004110681	004110686	004110691	79	44,3	150.000	850.000			
	630	004110779	004110780	004110781	102	40	280.000	1.600.000			





NH 01XL


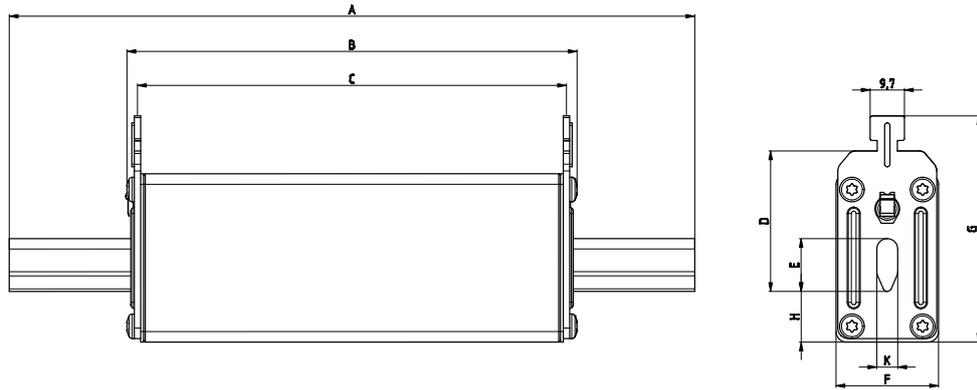


	A	B	C	D	E	F	G	H	K
01XL	194	128	123,2	40	15	29	65	15	6

NHS 01XL

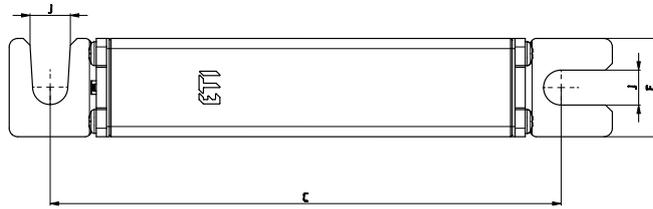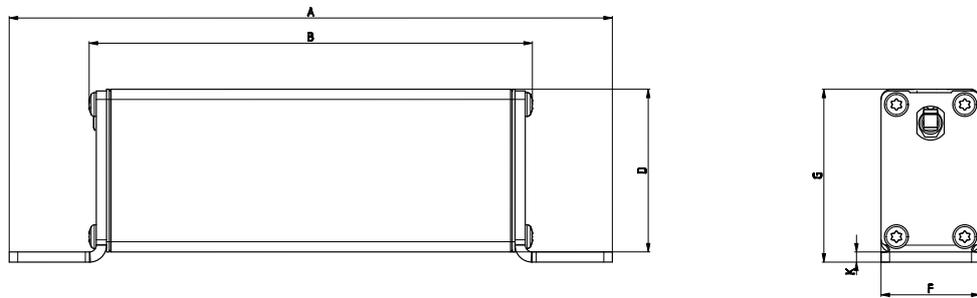


NHU 01XL

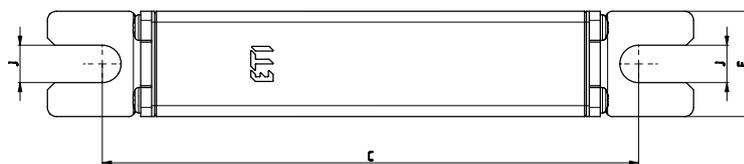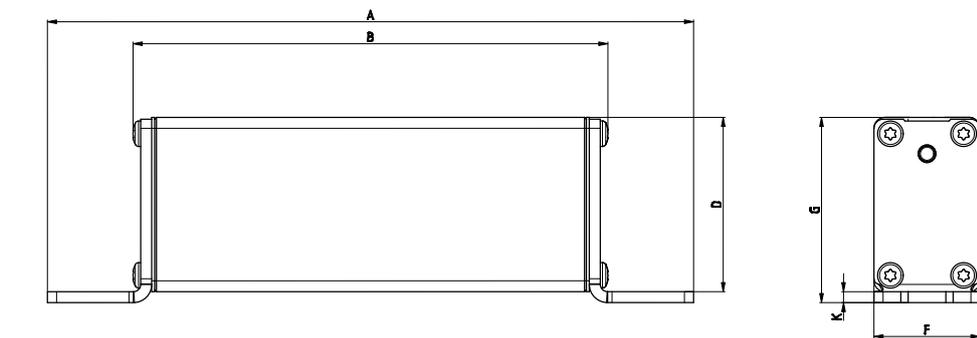

	A	B	C	F	G	K	J
01XLS,U	177	130	150	29	51	3	10


GREEN PROTECT / Battery Fuse

NH 1XL, 2XL, 3L

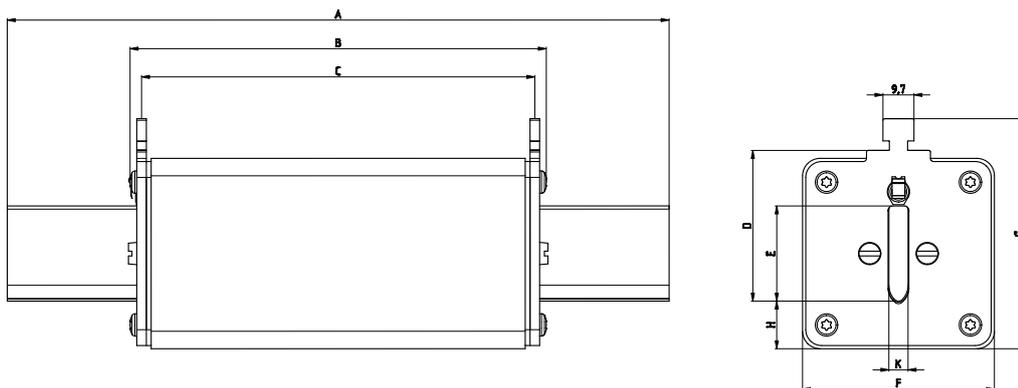


	A	B	C	D	E	F	G	H	K
1XL	192	131	125	42	24	51	67	13,5	6
2XL	208	130	126	48	30	61	71	15	6
3L	208	130	126	60	37	73	87	18	6

NHS 1XL, 2XL, 3L

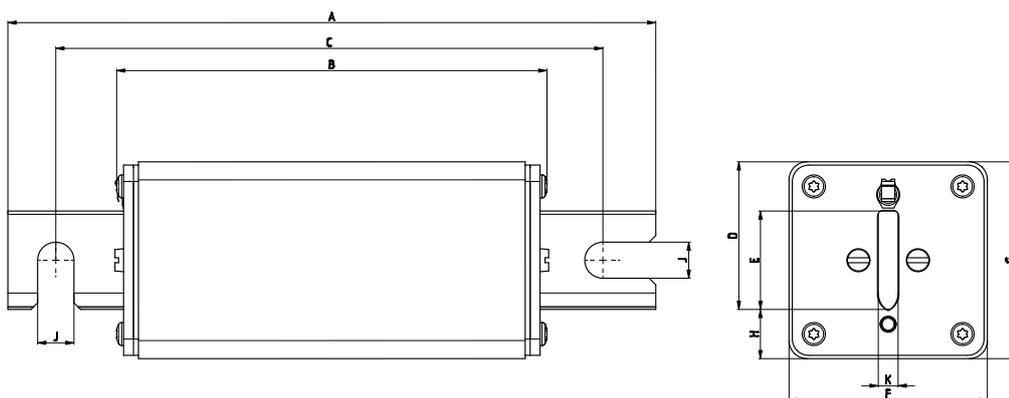


NHU 1XL, 2XL, 3L

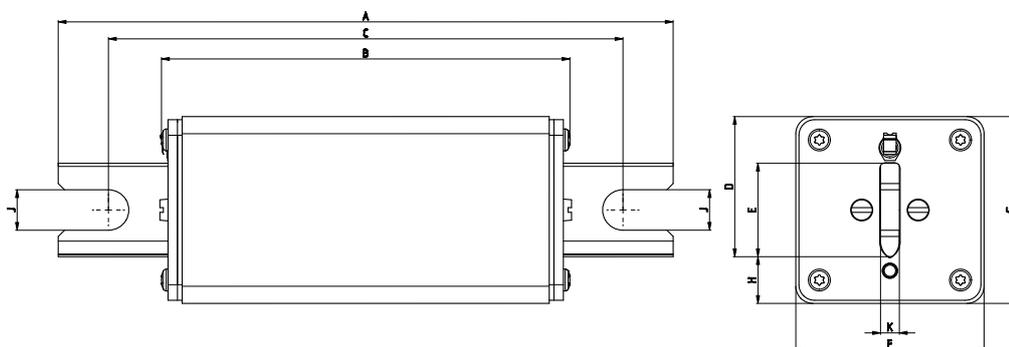


	A	B	C	D	E	F	G	H	K	J-NHS	J-NHU
1XL S,U	200	130	170	40	30	51	51	13,5	6	11	11
2XL S,U	200	130	170	45	30	61	61	15	6	11	13
3L S,U	200	130	170	55	37	73	73	18	6	11	13

Time current characteristics I/t


NH01XL

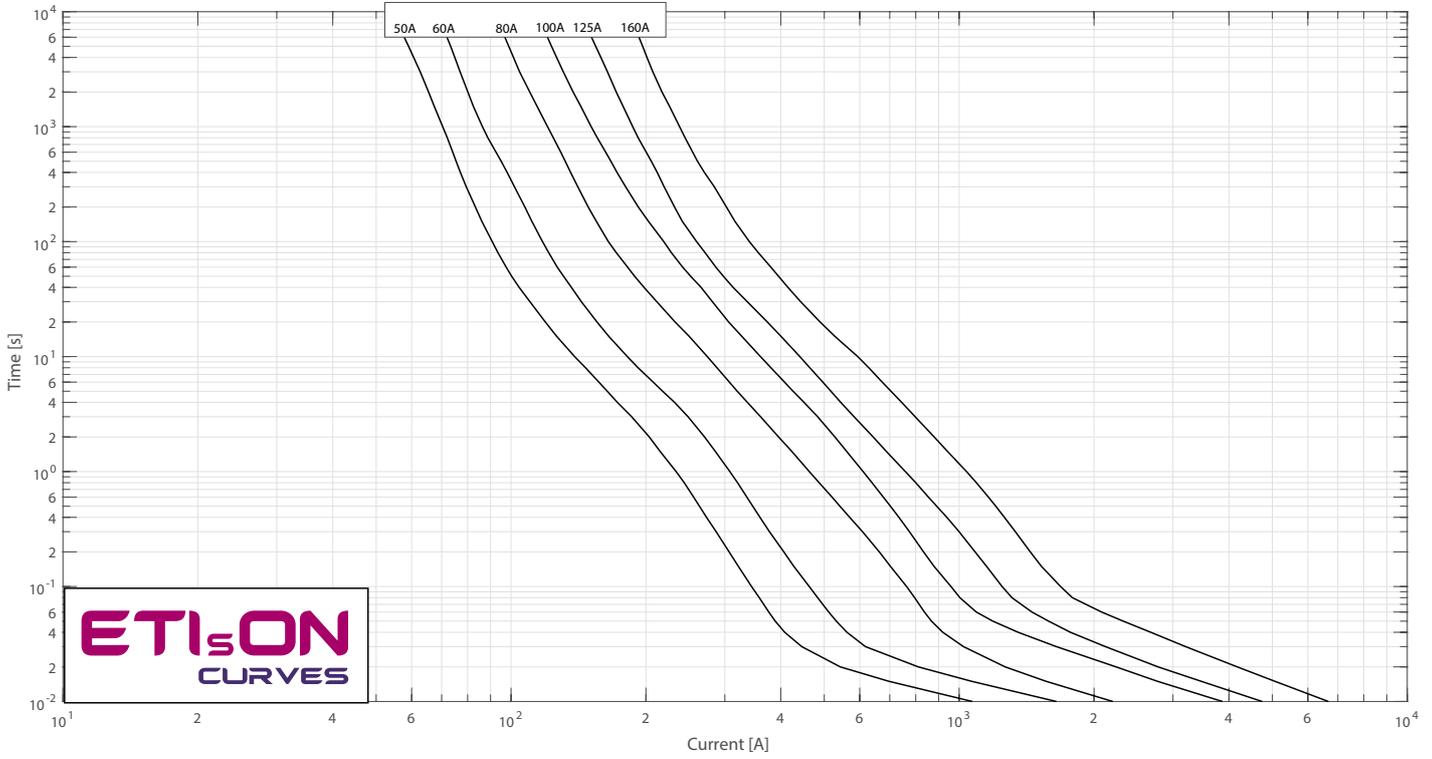


NH1XL

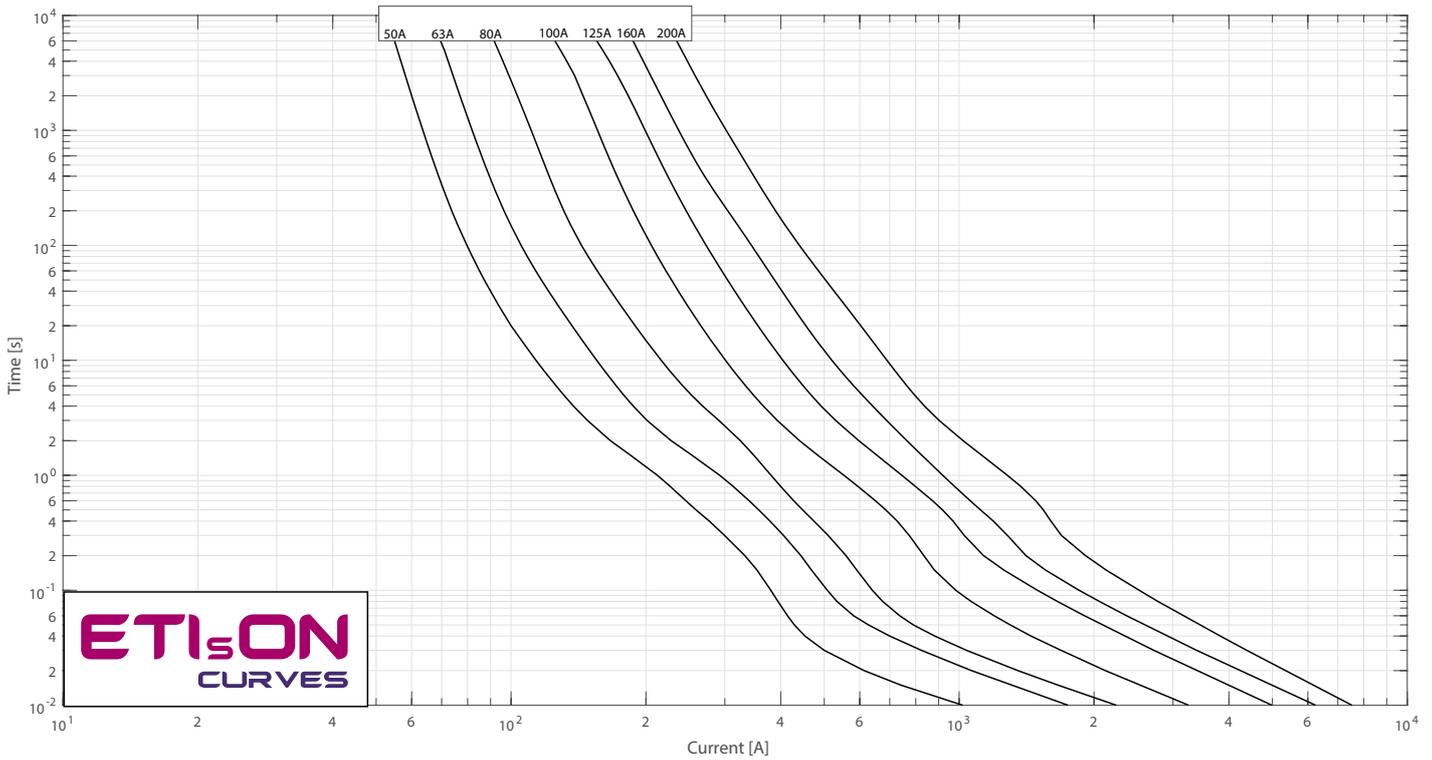

NH2XL, NH3L

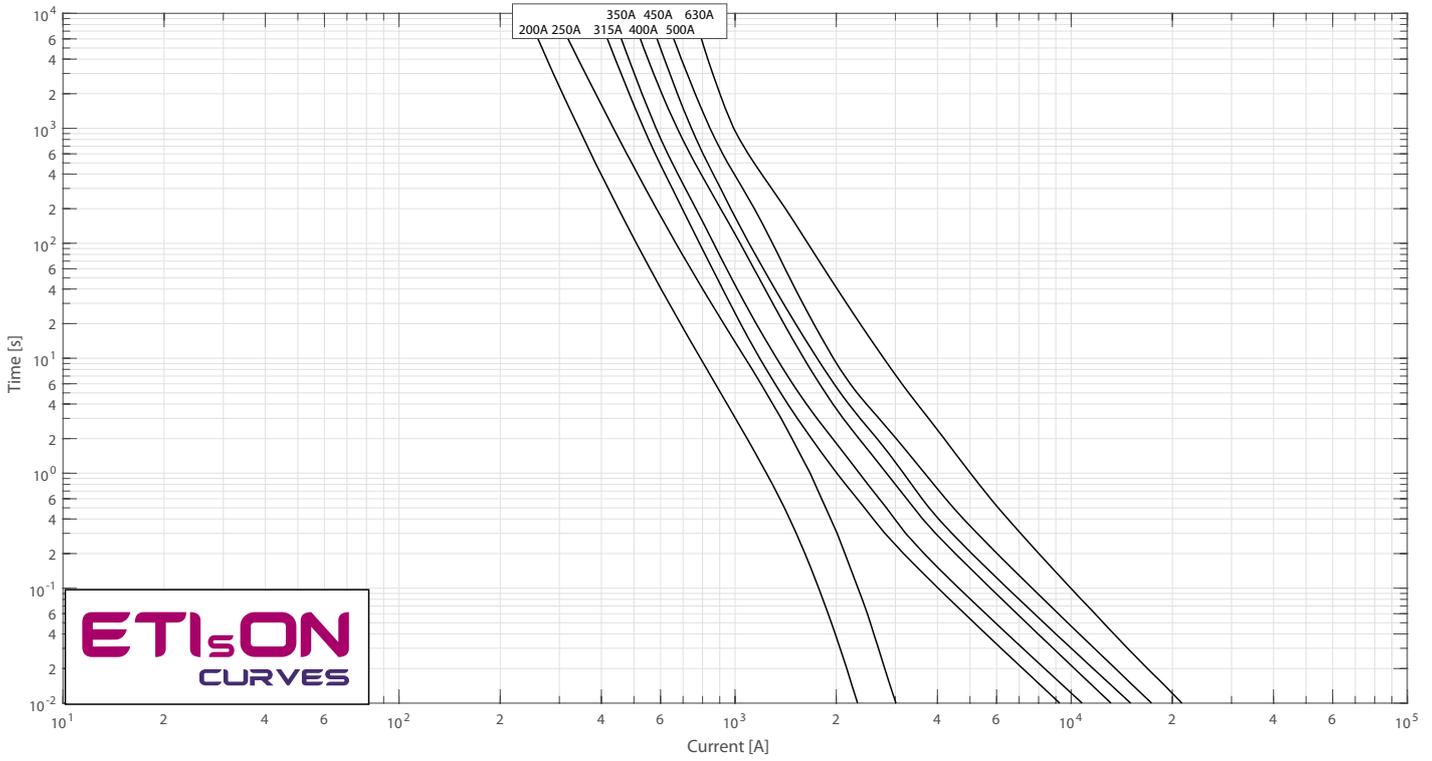

Ambient air temperature of fuse-link

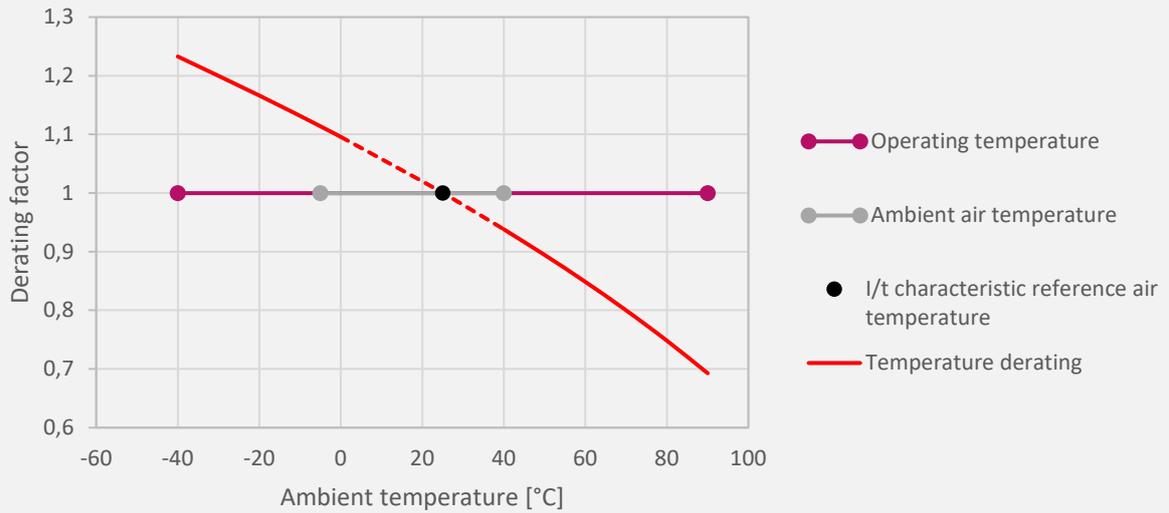

Legend:

T_{amb} – Ambient Temperature

TDF – Temperature Derating Factor

I_N – Nominal Current of Fuse-link

I_{TDF} – Nominal Current Including Temperature Derating Factor

Current calculation: $I_{TDF} = I_N \times TDF$

NH Renew Platform - Innovative Materials

Aluminum contacts and cover plates:
Aluminum is the third most abundant element in the earth's crust. It is the most common metal on earth, 800 times more common than copper.

Ceramics fuse-link body:
100% natural material.



Through-lay fuse-element:
Copper is 860 times more abundant element than silver.

Various connection types
U-screw
S-screw
E-screw
G-flush end



Certificates pending
UL recognized
IEC CB

Microswitch available
Designed and developed by ETI



- NH RENEW platform includes 4 patents
- Aluminum contacts
Specially shaped fastener and contact designed in one piece
- M-effect in combination with through-lay
Enables full-range characteristics
- Position of fuse-elements
Increased breaking capacity
- Fuse-element
Patented design of specially shaped fuse-elements which improves cycling operation



NH 3L aR / aBat Fuse-Link 1500V d.c.

General characteristics

Rated voltage	1500V d.c., L/R=3ms
Rated current	315 - 1250A
Breaking capacity	250kA
Characteristic	aR, aBat
Standard	IEC 60269-4, IEC 60269-7, UL 248-13, UL248-21
Application	For Ultra Quick protection in DC systems.


NH aR / aBat fuse-link 1500V d.c.

Size	I_n [A]	S_{170} screw contact	U_{170} screw contact	E_{170} screw contact	G_{140} flush end contact	Pre-arcing Joule integral [A ² s]	Operating Joule integral [A ² s]	Power dissipation [0,7 $\times I_n$] Pd [W]	Power dissipation [I_n] Pd [W]		
NH3L	315	004109000	004109020	004109120	004109040	70.000	630.000	25,6	68	1615	1/9
	350	004109001	004109021	004109121	004109041	125.000	1.125.000	25,4	64		
	400	004109002	004109022	004109122	004109042	150.000	1.350.000	31,2	82		
	450	004109003	004109023	004109123	004109043	130.000	1.170.000	28,9	73		
	500	004109004	004109024	004109124	004109044	215.000	1.935.000	27,5	67		
	630	004109005	004109025	004109125	004109045	290.000	2.610.000	38,2	98		
	750	004109006	004109026	004109126	004109046	380.000	3.012.000	53,9	147		
	800	004109007	004109027	004109127	004109047	430.000	3.365.000	60,9	170		
	900	004109008	004109028	004109128	004109048	475.000	3.620.000	78,6	239		
	1000	004109009	004109029	004109129	004109049	530.000	3.760.000	93,8	300		
	1100	004109010	004109030	004109130	004109050	670.000	3.900.000	109,3	375		
1250	004109011	004109031	004109131	004109051	740.000	4.683.000	-	-			
NH3L type with microswitch	315	004109060	004109080	004109140	004109100	70.000	630.000	25,6	68		
	350	004109061	004109081	004109141	004109101	125.000	1.125.000	25,4	64		
	400	004109062	004109082	004109142	004109102	150.000	1.350.000	31,2	82		
	450	004109063	004109083	004109143	004109103	130.000	1.170.000	28,9	73		
	500	004109064	004109084	004109144	004109104	215.000	1.935.000	27,5	67		
	630	004109065	004109085	004109145	004109105	290.000	2.610.000	38,2	98		
	750	004109066	004109086	004109146	004109106	380.000	3.012.000	53,9	147		
	800	004109067	004109087	004109147	004109107	430.000	3.365.000	60,9	170		
	900	004109068	004109088	004109148	004109108	475.000	3.620.000	78,6	239		
	1000	004109069	004109089	004109149	004109109	530.000	3.760.000	93,8	300		
	1100	004109070	004109090	004109150	004109110	670.000	3.900.000	109,3	375		
1250	004109071	004109091	004109151	004109111	740.000	4.683.000	-	-			


Accessories

Type	Max. current	Voltage range	Connection	Connection type	Code No.		
Microswitch	5A	250V a.c.	Fast-on terminals 6,3x0,8mm	C, NO, NC	422334100	15	12


NH3L G₁₄₀

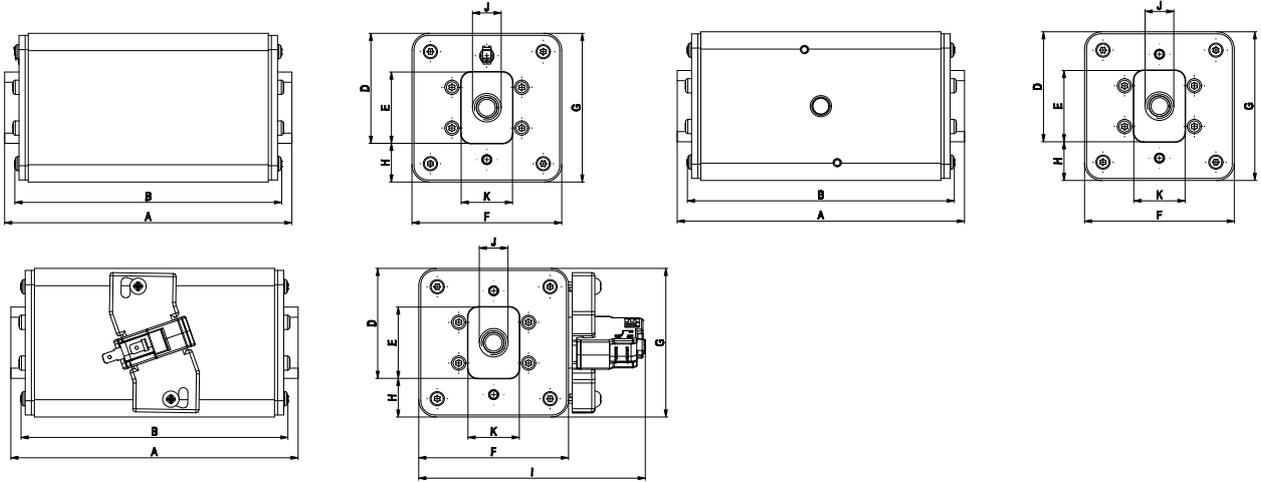

NH3L E₁₇₀

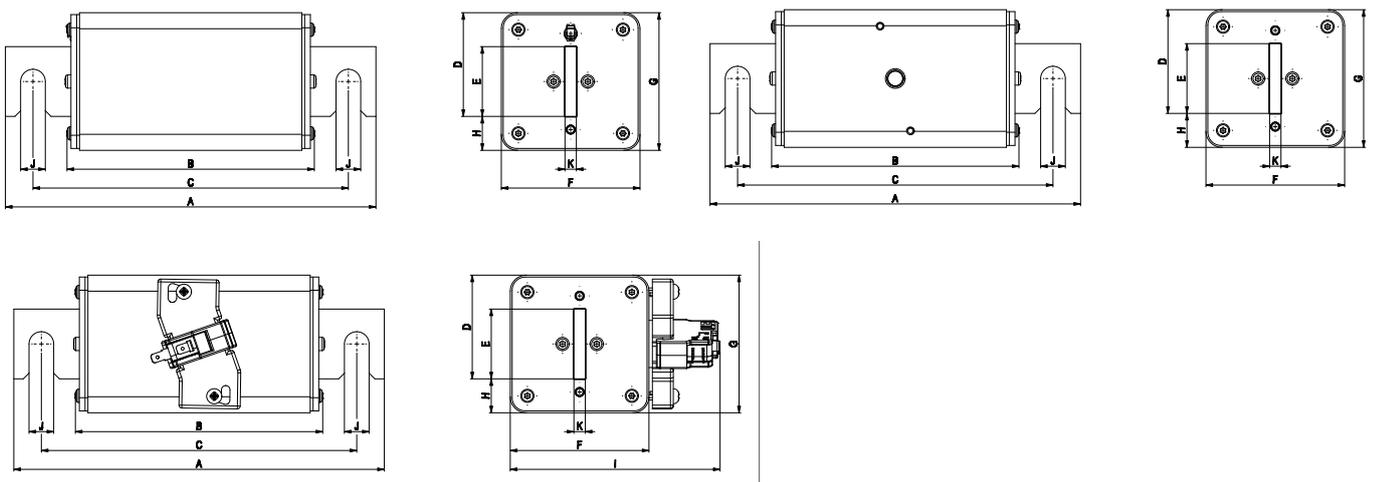


NH3L S₁₇₀

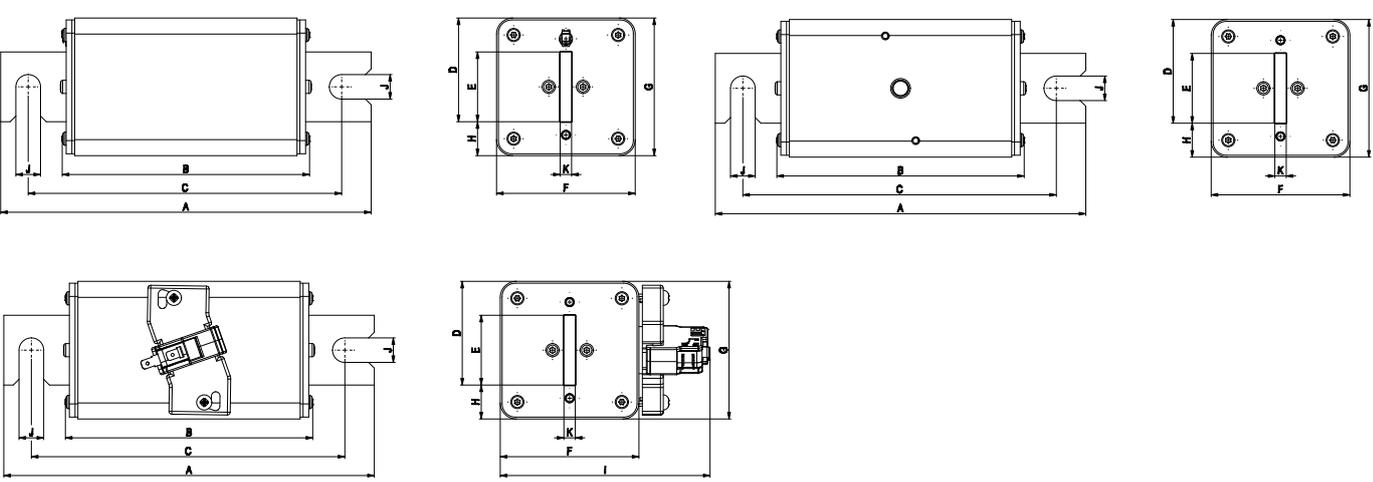


GREEN PROTECT / Battery Fuse

NH3L U₁₇₀

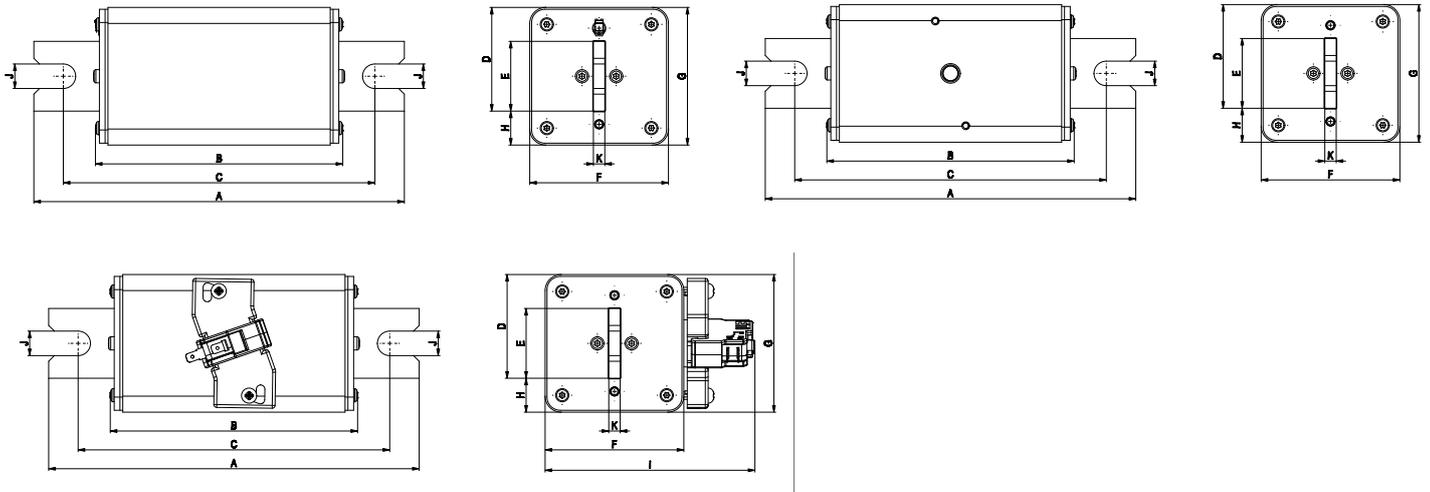


	A	B	C	D	E	F	G	H	I	J	K
NH3L S,U	195	130	165	55	37	73	73	18	111	13	6
NH3L G	140	130	/	54	35	73	73	19	111	M12	25

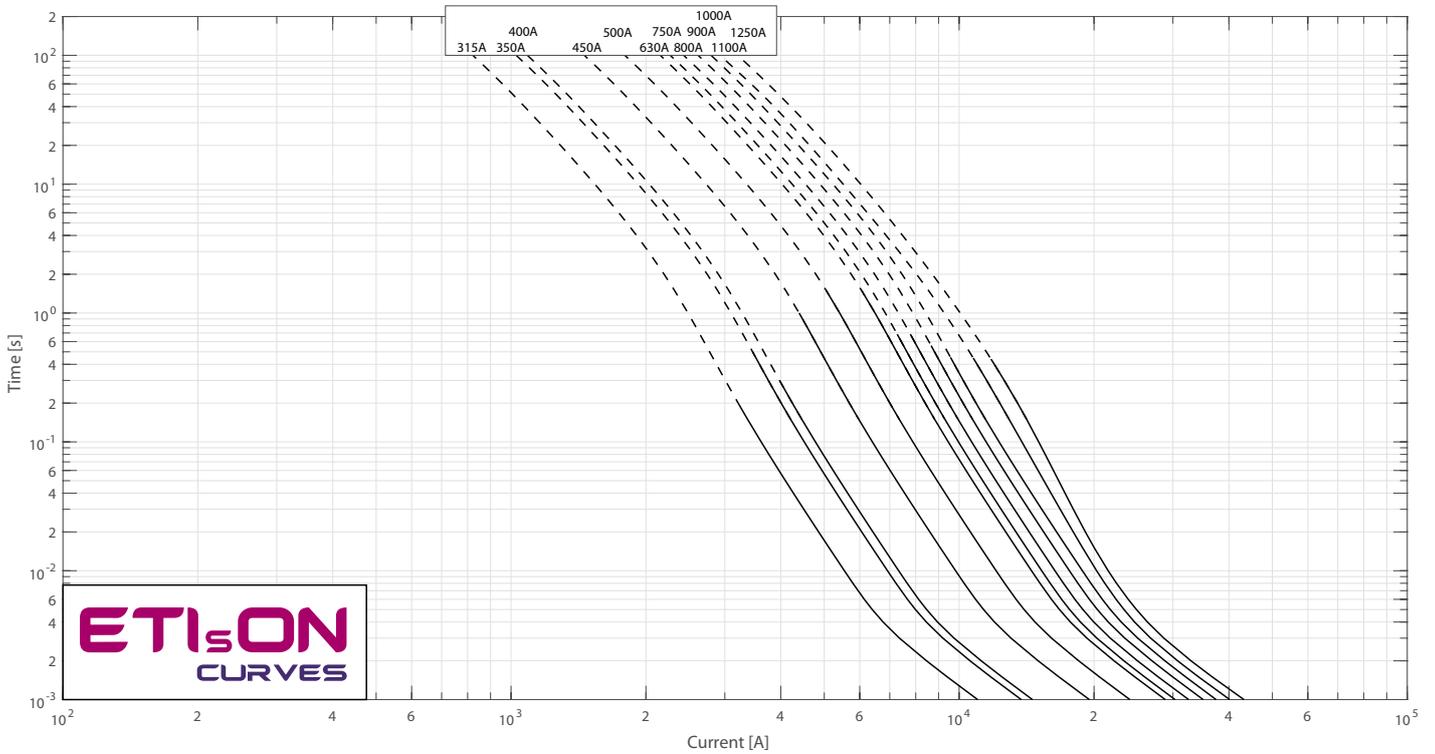

Parallel connection of fuse-links to increase the rated current

Rules for parallel connection of fuse-links:

- // The fuse-links have to be the same type, size, and rating.
- // The combination of parallel fuses must be selected by the manufacturer.
- // The current rating of parallel-connected fuse-links is lower than the sum of the single fuse-links ($n \times I_n > I_{n \text{ parallel}}$).
- // The current distribution on all parallel fuse-links must be the same.
- // Parallel fuse-links must be connected as prescribed by the manufacturer.
- // The incoming and outgoing connection must have prescribed cross-section.
- // The values of power dissipation are equal to the sum of values of power dissipation of a single fuse-link.
- // The Pre-arcing
- // Joule integral is approximately equal to $n^2 \times I^2 t_{\text{[single fuse-link]}}$
- // Breaking capacity is not larger than I1 of a single fuse-link.
- // The cut-off current is approximately equal $n \times I_{\text{cut-off [single fuse-link]}}$
- // The temperature rise of each parallel fuse-links is higher than the temperature rise of single fuse-link.

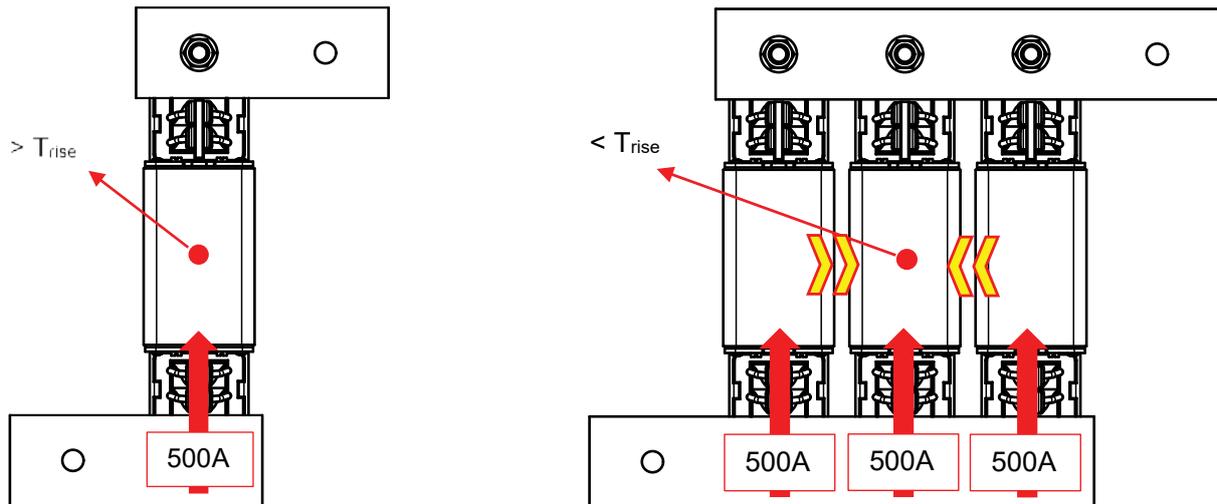

Parallel solutions

Type	Code No.
NH 550V	
NH 700V	
NH 800V	
NH 1000V	On request
NH 1100V	
NH 1500V	

CHARGER FUSE



ETI CHARGER
FUSE
CHARGE 2
SI-14111 (2024)
NHU3/150 1000V d.c.
600A 30kA
L/Rv3ms IEC60269
004110005
RoHS REACH CE
Made in Slovenia

 etigroup
www.etigroup.eu

**For protection of high
power DC EV chargers**

ETI
SWITCH TO
A SAFE FUTURE


NH XL Charger fuse-link 1000V d.c.

General characteristics

Rated voltage	1000V d.c. L/R=3ms
Rated current	50 - 600A
Breaking capacity	30kA
Characteristic	aR, gPV
Standard	IEC 60269-4, IEC 60269-6
Application	For protection on DC side of EV chargers


NH Charger Fuse 1000V d.c.

Size	Characteristic	I_n [A]	Code No.	Pre-arcing Joule integral [A ² s]	Operating Joule integral [A ² s]	Power dissipation (0,7 x I_n) Pd [W]	Power dissipation (I_n) Pd [W]	g	Box
NHU01XL/150	aR	50	004110809	280	2.000	8	17	450	3/30
		63	004110810	500	3.000	9	19		
		80	004110811	770	5.000	13	28		
		100	004110812	2.000	15.000	10	25		
		125	004110813	3.300	25.000	12	31		
		160	004110814	5.800	48.000	15	38		
		200	004110815	10.500	60.000	18	46		
		250	004110816	16.200	75.000	23	62		
NHU3L/150	gPV	300	004110800	30.500	150.000	19	47	1200	1/9
		350	004110801	48.000	170.000	22	54		
		400	004110802	65.300	220.000	24	63		
		450	004110803	89.000	300.000	26	65		
		500	004110804	120.000	450.000	29	72		
		600	004110805	350.000	870.000	32	83		

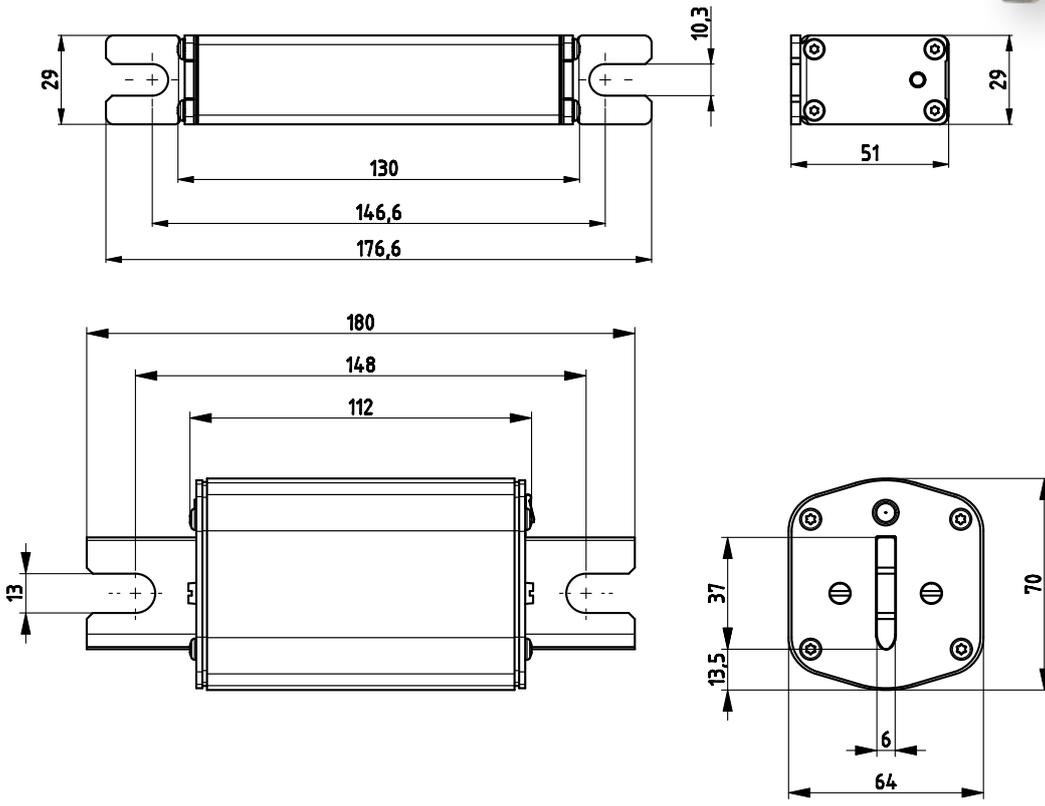


Time current characteristics I/t

NHU01XL 150 aR

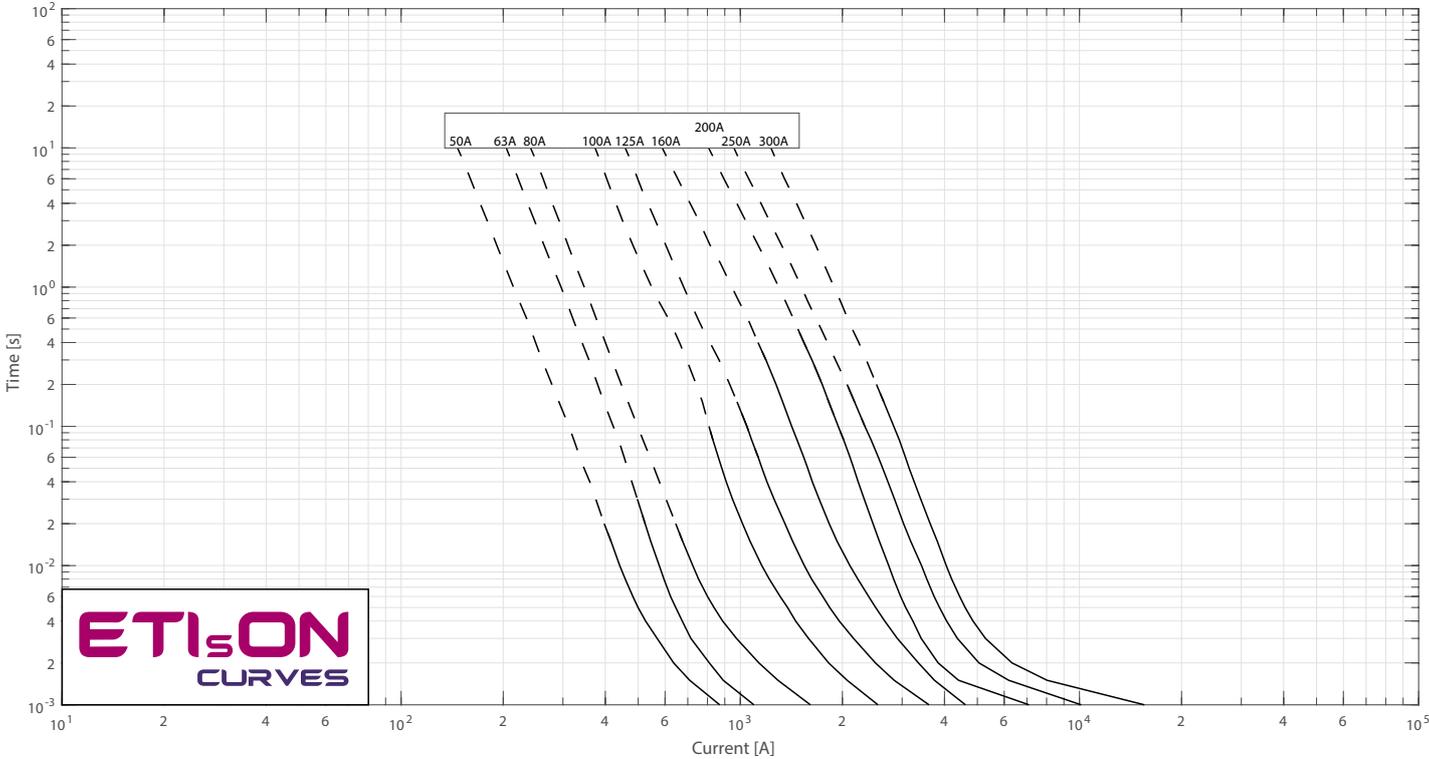

NHU3L 150 gPV

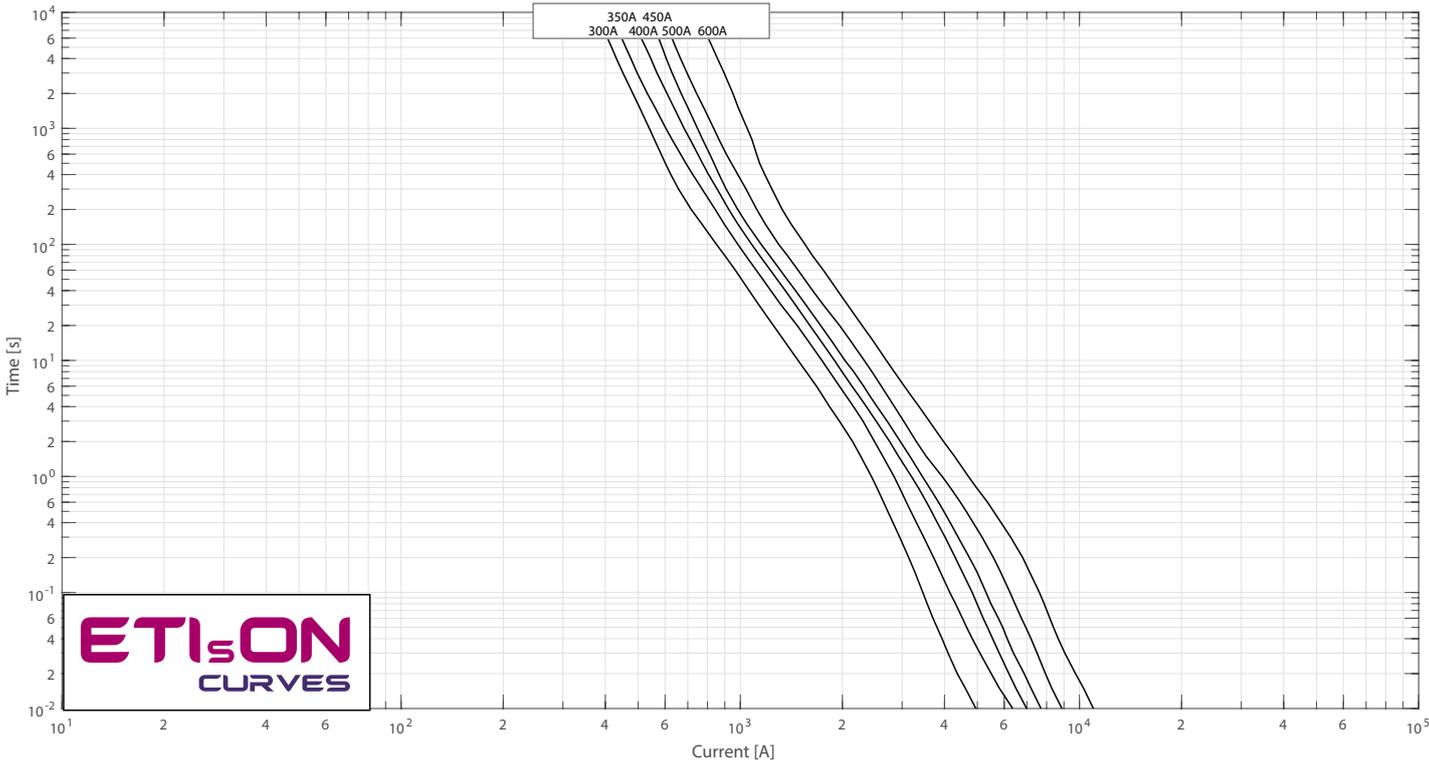

NH Charger fuse-link 1000V d.c.


General characteristics

Rated voltage	1000V d.c. (L/R=2ms)
Rated current	63 - 630A
Breaking capacity	30kA
Characteristic	aR
Standard	IEC 60269-4
Application	For protection on DC side of EV chargers

NH Charger Fuse 1000V d.c.

Size	I _n [A]	Code No.	Type with MK	Pre-arcing Joule integral [A ² s]	Operating Joule integral [A ² s]	Power dissipation (0,7 x I _n) Pd [W]	Power dissipation (I _n) Pd [W]		
NHU1/110	63	004110840	004110860	200	5.500	5,5	12,9	500	1/26
	80	004110841	004110861	300	11.500	6,9	17,1		
	100	004110842	004110862	500	19.000	9,2	24,1		
	125	004110843	004110863	1.000	27.000	10,8	28,1		
	160	004110844	004110864	2.000	31.000	14,9	41,8		
	200	004110845	004110865	4.000	70.000	16,7	45,4		
	250	004110846	004110866	9.000	80.000	21,0	53,7		
	315	004110847	004110867	16.000	130.000	25,8	66,2		
	350	004110848	004110868	23.500	170.000	25,2	69,3		
	400	004110849	004110869	31.000	245.000	28,8	83,2		
NHU3 /110	500	004110880	004110890	50.000	315.000	37,4	109	1250	3/15
	630	004110881	004110891	89.000	420.000	48,5	153		




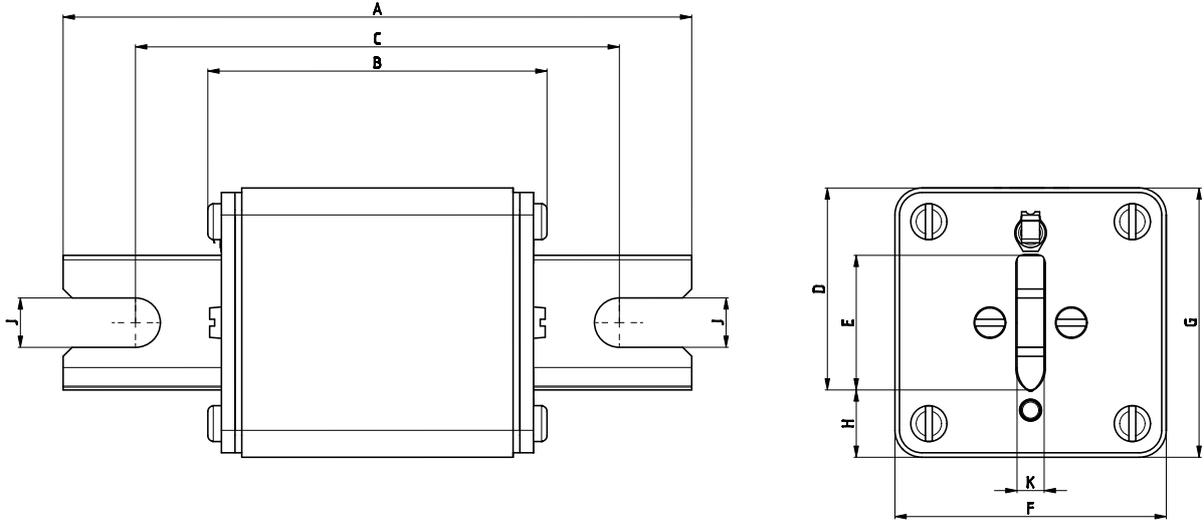


Size	Dimensions [mm]									
	A	B	C	D	E	F	G	H	K	J
1	140	73	110	38	24	51	51	12	6	11
3	140	73	110	55	37	73	73	18	6	11

Time current characteristics I/t


NHU1 110 aR

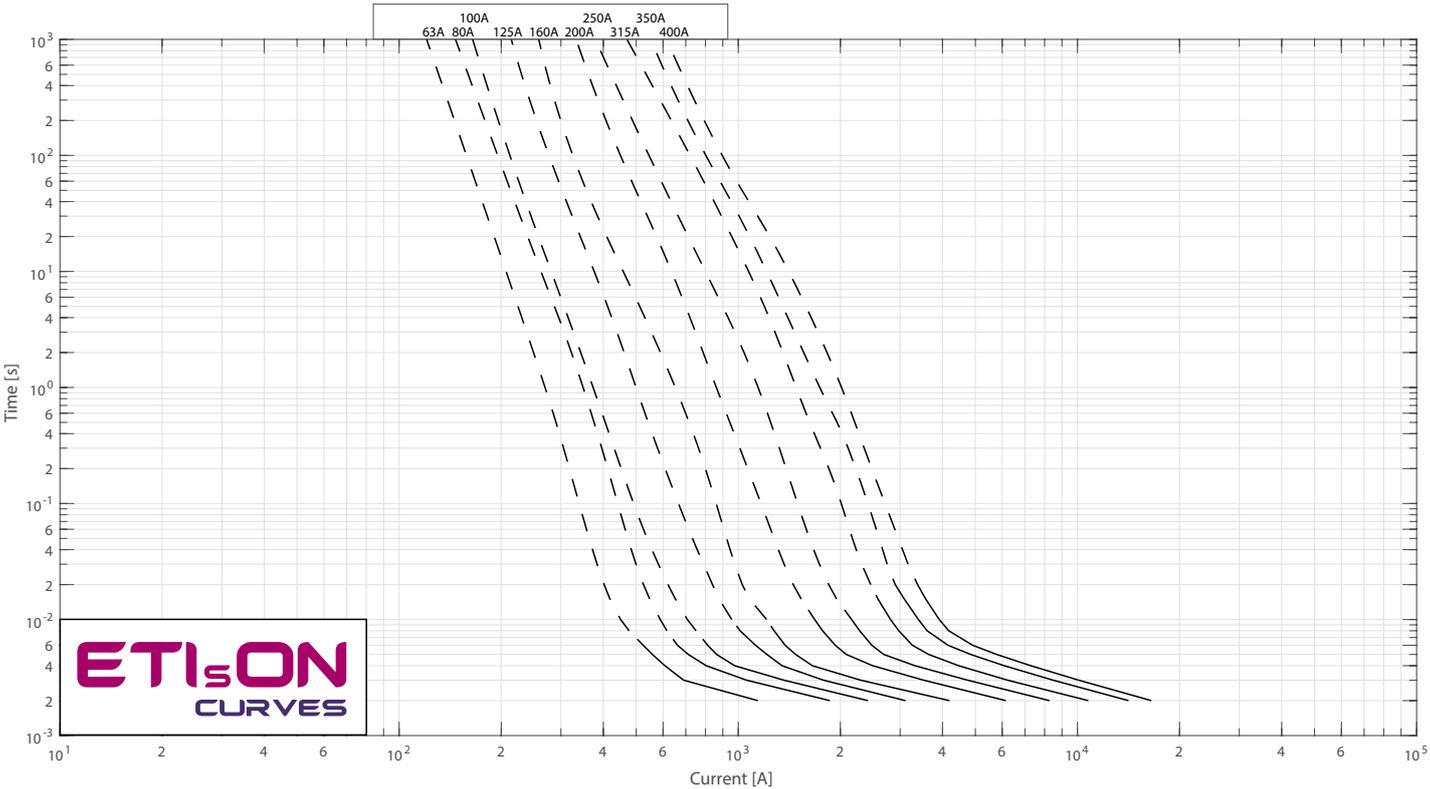

NHU3L 150 gPV

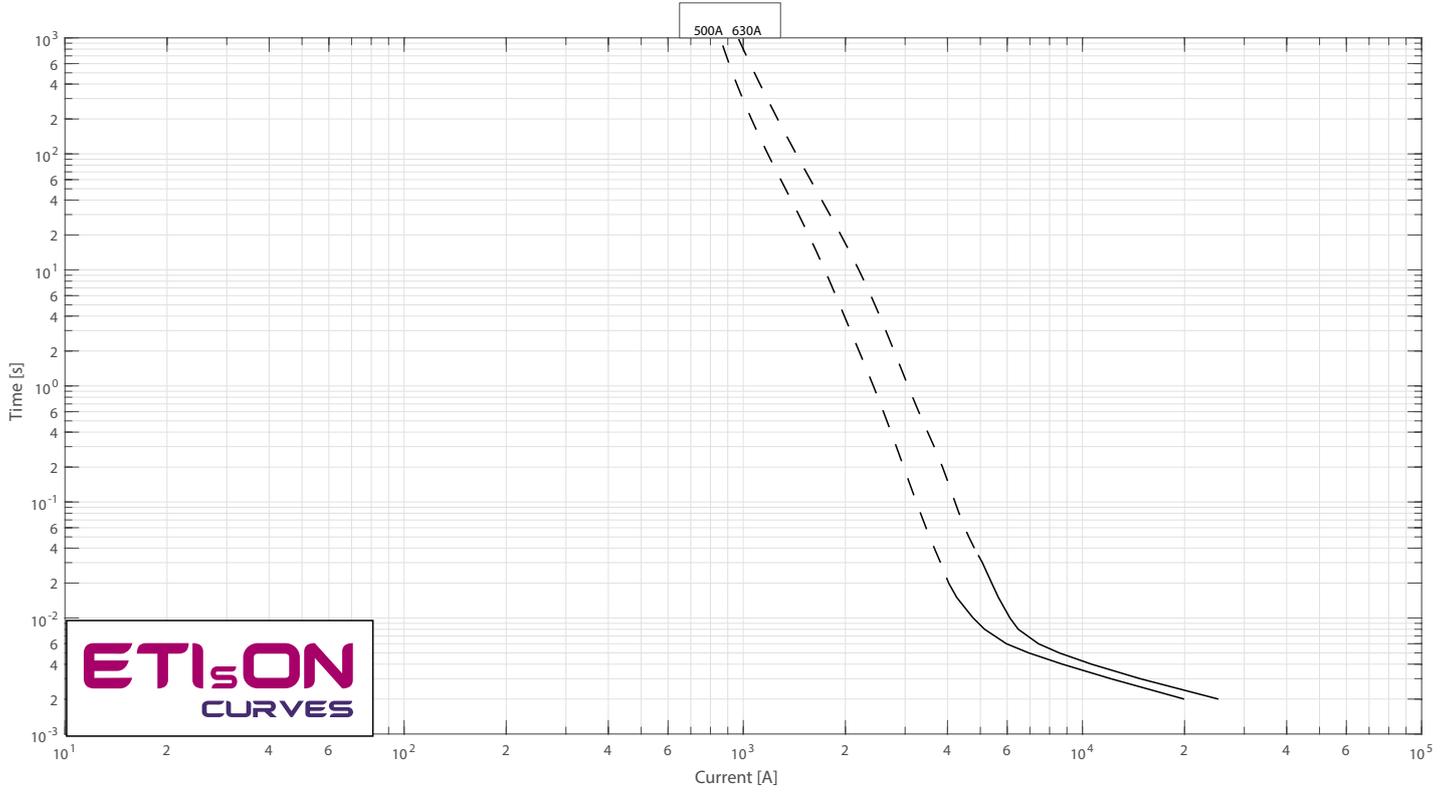

DC FUSE BASES

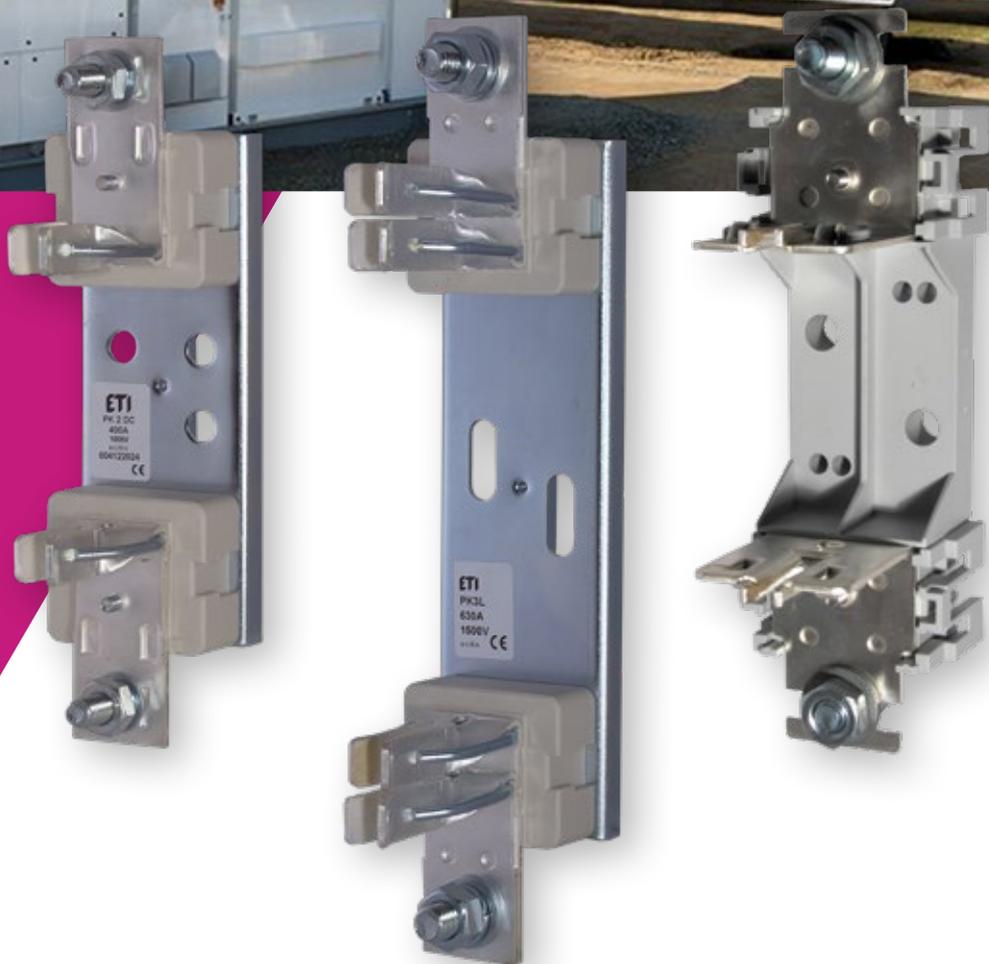

 etigroup
www.etigroup.eu

**Fuse Bases for
NH DC Fuse-links**

ETI
SWITCH TO
A SAFE FUTURE


Fuse base PK 00, 0, 1, 2, 3 1000V a.c./d.c.



General characteristics

Rated voltage	1000V a.c./d.c.
Rated current	160A, 250A, 400A, 630A
Insulation class	C-VDE 0110
Degree of protection	IP00
Standards	IEC 60269, DIN VDE 0636, DIN 43620, DIN 43623



Fuse base PK 1000V a.c./d.c.

Size	I_n [A]	No. of poles	Code No.	Cable lugs according to DIN 46235 [mm ²]	Tightening torque [Nm]	Max. power dissipation of the fuse-link per pole [W]	 g	
PK 00 M8-M8 DC 1000V 1p	160A	1p	004122044	6 - 95	10	12	173	3/75
PK 0 M8-M8 DC 1000V 1p	160A		004122033	6 - 95	10	12	258	3/90
PK 1 M10-M10 DC 1000V 1p	250A		004122025	25 - 150	32	32	605	3/18
PK 2 M10-M10 DC 1000V 1p	400A		004122024	25 - 240	32	45	845	3/15
PK 3 M12-M12 DC 1000V 1p	630A		004122023	25 - 300	32	60	1110	3/12

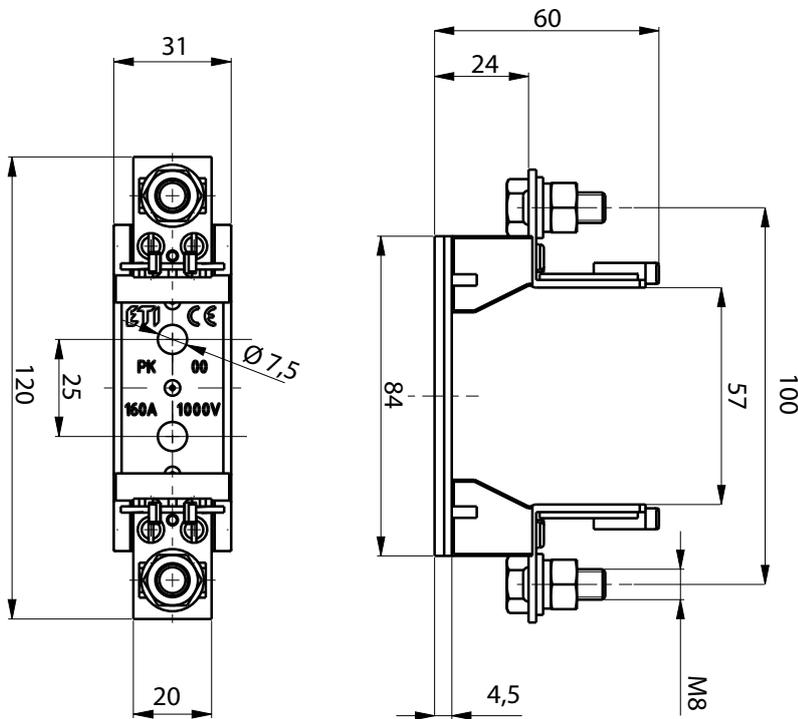

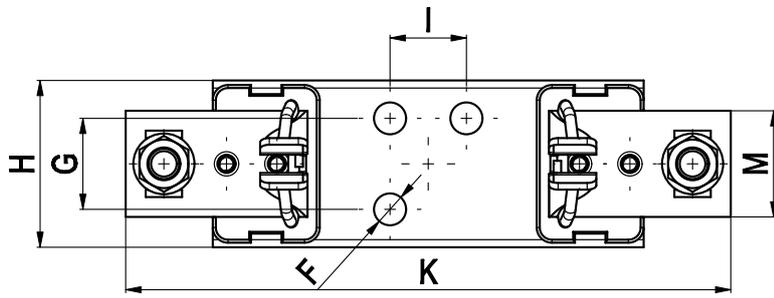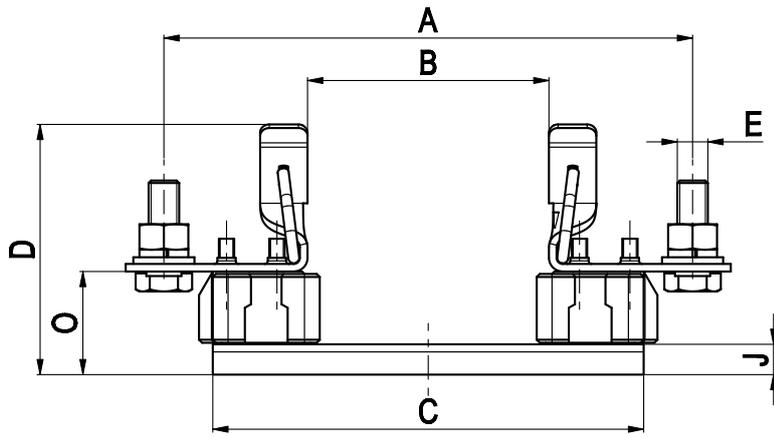


PK0,1 DC

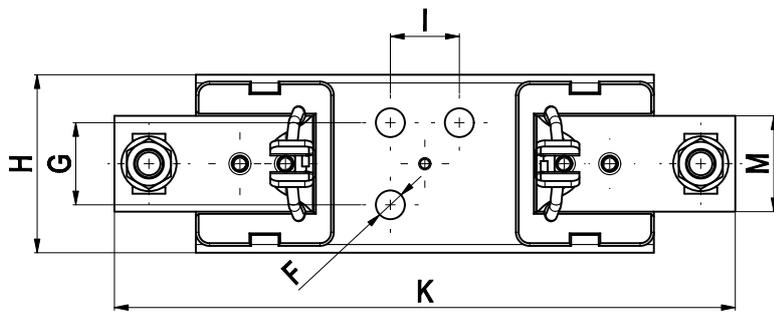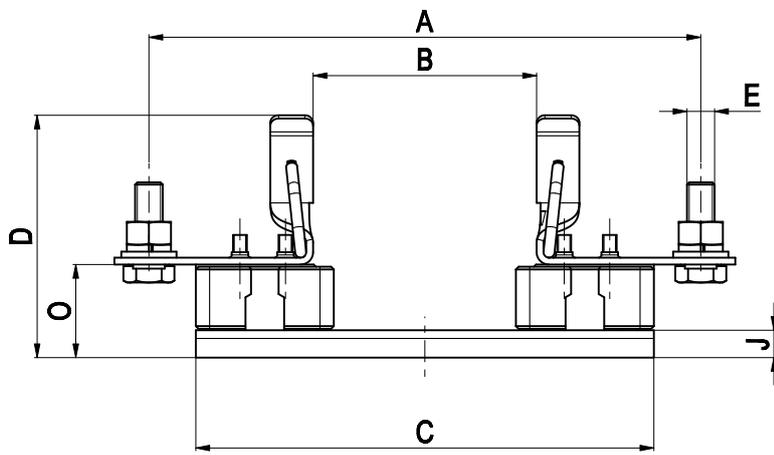

PK2 DC



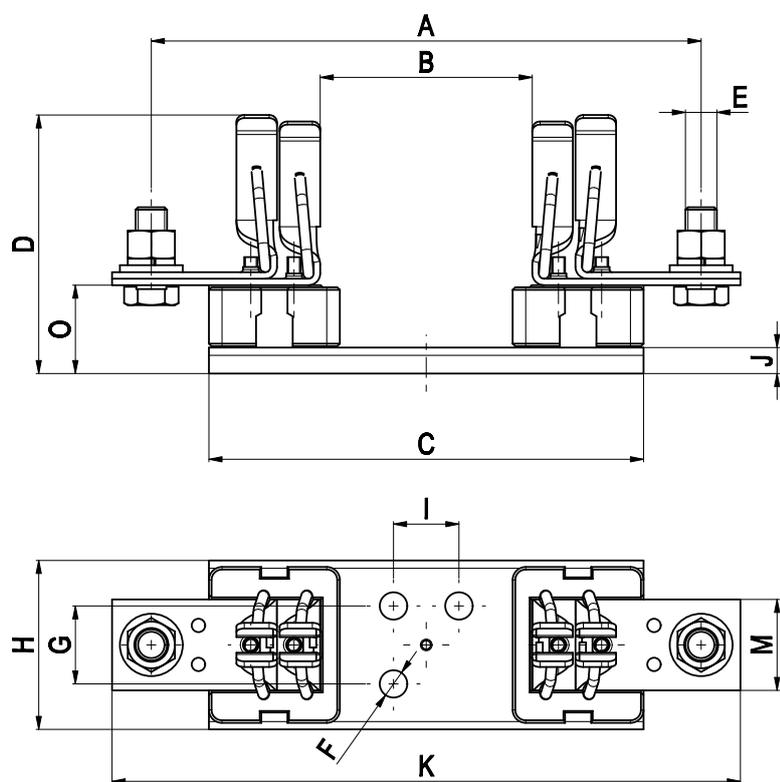

PK3 DC



Type	Dimensions [mm]												
	A	B	C	D	E	F	G	H	I	J	K	M	O
PK 00	100	57	84	60	M8-M8	Ø7,5	-	31	25	4,5	120	20	24
PK 0	150	74	130	60	M8-M8	Ø7,5	-	33	25	4,5	170	20	25
PK 1	175	80	141	82	M10-M10	Ø10,5	30	55,5	25	10	200	35	35
PK 2	200	80	166	87	M10-M10	Ø10,5	30	65	25	10	225	35	35
PK 3	210	80	166	99	M12-M12	Ø10,5	30	65	25	10	240	35	35



Fuse base PK XL 1500V d.c.

General characteristics

Rated voltage	1500V d.c.
Rated current	160A, 250A, 400A, 630A
Insulation class	C-VDE 0110
Degree of protection	IP00
Standards	IEC 60269, DIN VDE 0636, DIN 43620, DIN 43623

Fuse base PK XL 1500V d.c.



Size	I_n [A]	No. of poles	Code No.	Cable lugs according to DIN 46235 [mm ²]	Tightening torque [Nm]	Max. power dissipation of the fuse-link per pole [W]		
PK 01XL M8-M8 1500V 1p	160A	1p	004132029	6 - 95	10	12	300	3/75
PK 1XL M10-M10 1500V 1p	250A		004132017	25 - 150	32	32	675	3/90
PK 2XL M10-M10 1500V 1p	400A		004132019	25 - 240	32	45	921	3/18
PK 3L M12-M12 1500V 1p	630A		004132023	25 - 300	32	60	1184	3/15

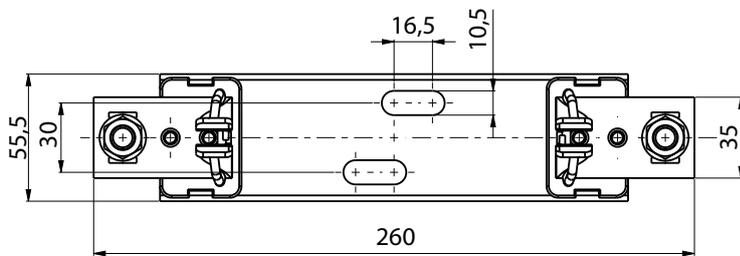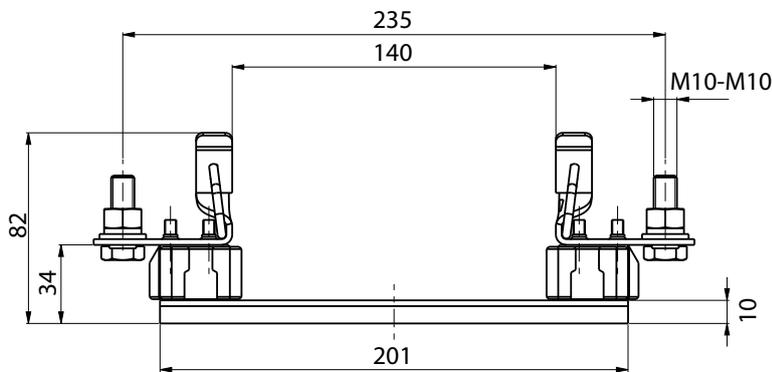



PK1XL



GREEN PROTECT / Fuse bases for NH DC fuse-links

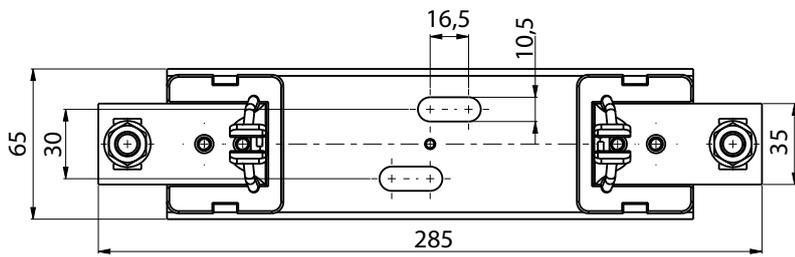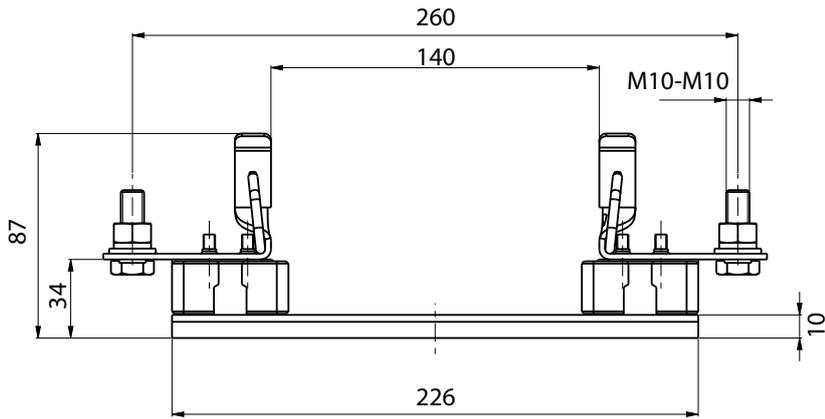

PK2XL

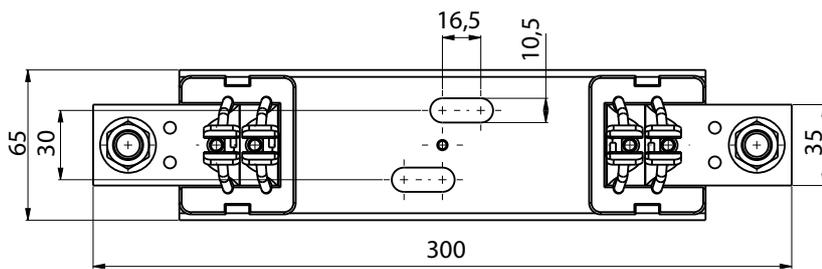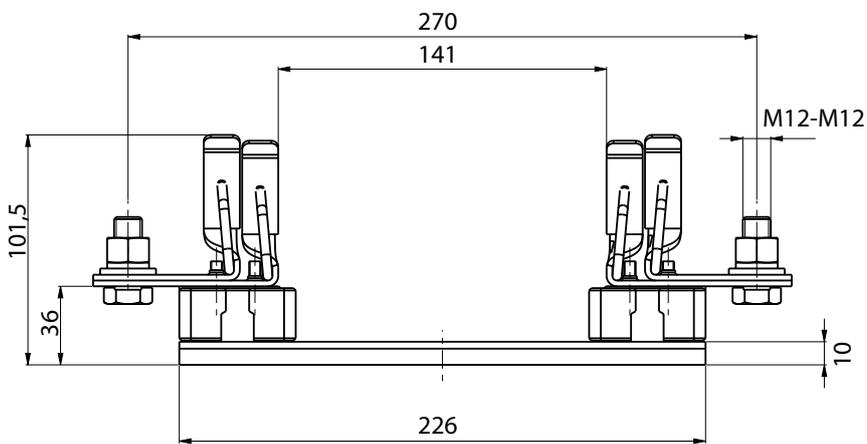

PK3L



Fuse base U1...3/GZ/1500/H

General characteristics

Type		U1XL-1IGZ/1500/H	U2XL-1IGZ/1500/H	U3L-1IGZ/1500/H	
Size		NH1XL	NH2XL	NH3L	
Rated voltage	V	1500	1500	1500	
Rated current	A	250	400	630	
Conv. free air thermal current with fuse-links	A	200	315	630	
Conv. free air thermal current with solid links	A	325	400	1000	
Rated frequency	Hz	40-60	40-60	40-60	
Max. permis. power dissipation per fuse-link	W	35	35*	70	
Cable terminal - Flat terminal	Screw	–	M10	M12	
	Cable lug (DIN 46235)	mm ²	25-240	25-240	25-300
	Flat termination	mmxmm	30x10	30x10	40x10
	Rated torque	Nm	30-35	30-35	30-35
Cable terminal - Terminal	Cross-section	mm ²	KM2G	KM2G	P32
	Rated torque	Nm			
Degree of protection - Front side, device fitted	Operating conditions	–	IP00	IP00	IP00
	Gripping lug cover A-U... (available separately) applied	–	IP2X	IP2X	IP2X
Operating conditions	Ambient temperature**	°C		-25 ... +55	
	Rated operating mode	–		Uninterrupted duty	
	Actuation	–		–	
	Mounting position	–		Vertical, horizontal	
	Altitude	m		< 2000	
	Pollution degree	–		3	
Overvoltage category	–		III		

* with application of gPV fuse-links max. 250A: 46W

** 35°C normal temperature, at 55°C with reduced operating current

Fuse base U1...3/GZ/1500/H

Type	I _n [A]	Code No.	Max. Connection [mm ²]		
U1XL-1IGZ/1500/H	250	004122060	240	600	1
U2XL-1IGZ/1500/H	400	004122061	240	600	1
U3L-1IGZ/1500/H	630	004122062	300	1000	1


Accessories

Type	Code No.	Description		
K-U1XL-3L	004122063	Mechanical fuse monitoring	9	1
A-U1XL-2XL	004122064	Gripping lug cover	13	1
A-U3L	004122065	Gripping lug cover	32	1



GREEN PROTECT / Fuse bases for NH DC fuse-links

Size	Dimensions [mm]										
	A	B	C	D	E	F	G	H	I	K	L*
U1XL-1IGZ/1500/H	59	257	300,5	30	37	102,5	175	92	22	M10	111
U2XL-1IGZ/1500/H	64	257	300,5	30	37	107	175	92	22	M10	119
U3L-1IGZ/1500/H	80	270	328	40	38	122,5	25	96	26	M12	1.345

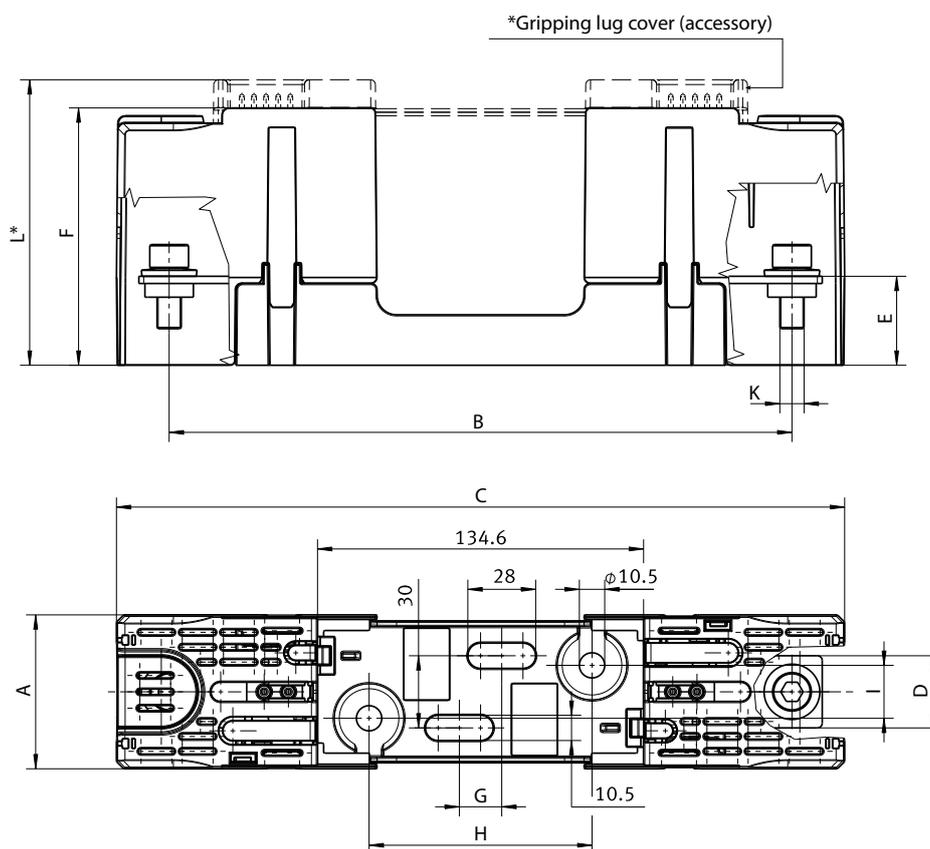

Fuse base U1-1/GZ/PV


General characteristics

Rated voltage	1000V d.c.	
Rated current	160A	
Fuse-link size	1C, 1	
Conv. free air thermal current with fuse-links	160A	
Conv. free air thermal current with solid links	325A	
Max. permis. power dissipation per fuse-link	31W	
Cable terminal - Flat terminal	Screw	M10
	Cable lug (DIN 46235)	25-150 mm ²
	Flat termination	30x10 mmx-mm
	Rated torque	30-35 Nm



Fuse base U1-1/GZ/PV

Type	I _n [A]	Code No.	Max. Connection [mm ²]	g	
U1-1/GZ/PV	160	004122035	150	387	1

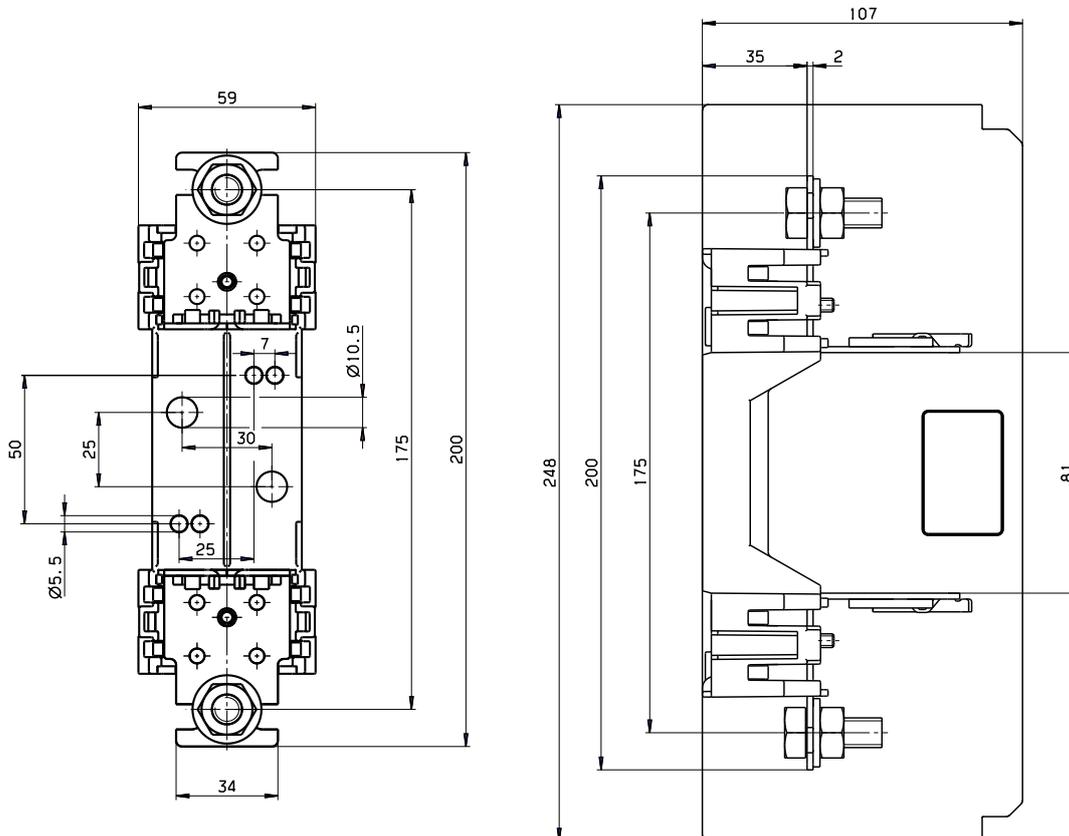

DC FUSEHOLDERS & DISCONNECTORS



 etigroup
www.etigroup.eu

**Fuseholders & Disconnectors
for NH DC Fuse-Links**

ETI
SWITCH TO
A SAFE FUTURE

Photovoltaic fuseholder TL1-1/9/1000V/PV

General characteristics


Number of poles	1	
Rated voltage	1000V d.c.	
Rated current	160A	
Conv. free air thermal current with fuse-links	160A	
Utilization category	DC-20B	
Fuse-links	Size to DIN 43620	1C, 1
	Max. rated current (gL/gG)	160A
	Max. permis. power loss per fuse-link	25W
Cable terminal - Flat terminal	Screw	M10
	Cable lug (DIN 46235)	25-240 mm ²
	Flat termination	30x10 mm
	Rated torque	30-35 Nm
Type of protection - front side, device fitted	IP20, IP10	
Operating conditions	Ambient temperature*	-25 ... +55
	Rated operating mode	Cont. operation
	Actuation	Dependent manual actuation
	Mounting position	Vertical, horizontal
	Altitude	≤ 2000 m
	Pollution degree	3
	Overvoltage category	III

*35°C normal temperature, 55°C with reduced operating current



Photovoltaic fuseholder TL1-1/9/1000V/PV

Type	I _n [A]	Code No.	Max. Connection [mm ²]	Terminal		
TL1-1/9/1000V/PV	160	004122038	150	M10	1070	1

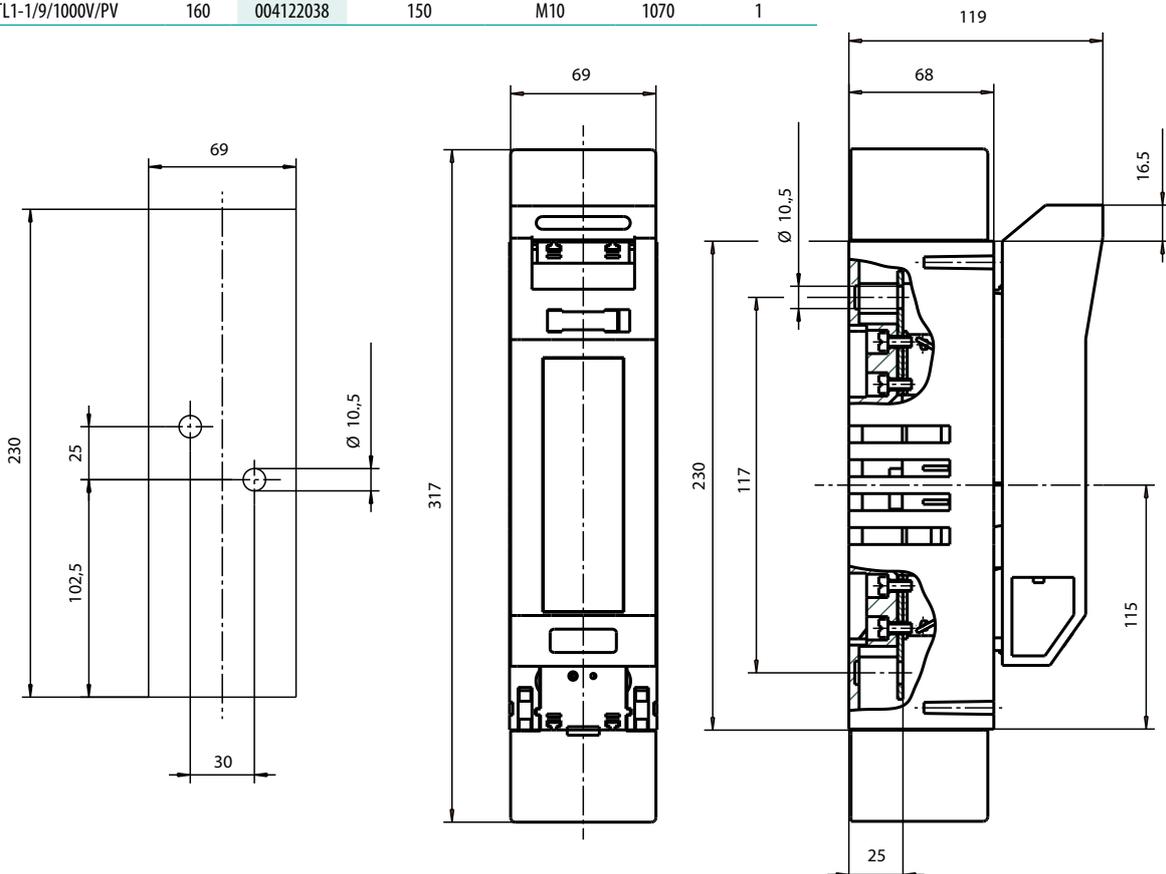

Photovoltaic fuseholder TL1,3-1/9/1200V

General characteristics

Type		TL1/1200V	TL3/1200V
For NH fuse-links/extended length/acc. to DIN VDE 0636-2	Size	a1=194mm, a4=124mm	a1=209mm, a4=124mm
Rated voltage		1200V a.c. / 1000V d.c.	1200V a.c. / 1000V d.c.
Rated current		250A	630A
fuse-link size		1XL	2XL, 3L
Conv. free air thermal current with fuse-links		250A	630A
Conv. free air thermal current with solid links		325A	1000A
Rated frequency		40-60 Hz	40-60Hz
Utilization category		AC-20B, DC-20B	AC-20B, DC-20B
Max. permis. power loss per fuse-link		25W	48W
Cable terminal - Flat terminal	Bolt diameter	M10	M12
	Cable lug (DIN 46235)	25-150 mm ²	25-300 mm ²
	Flat bar	30x10 mm	40x10 mm
	Rated torque	30-35 Nm	30-35 Nm
Type of protection - front side, device fitted	Switching cover close	IP20	IP20
	Switching cover open	IP10	IP10
Operating conditions	Ambient temperature*	-25 ... +55	
	Rated operating mode	Cont. operation	
	Actuation	Dependent manual operation	
	Mounting position	Vertical, horizontal	
	Altitude	≤ 2000 m	
	Pollution degree	3	
Overvoltage category	III		


*35°C normal temperature, 55°C with reduced operating current

Photovoltaic fuseholder TL1,3-1/9/1200V


Type	I _n [A]	Code No.	Max. Connection [mm ²]	Terminal		
TL1-1/9/1200V	250	004122036	150	M10	1485	1
TL3-1/9/1200V	630	004122037	300	M12	2535	1



TL1-1/9/1200V

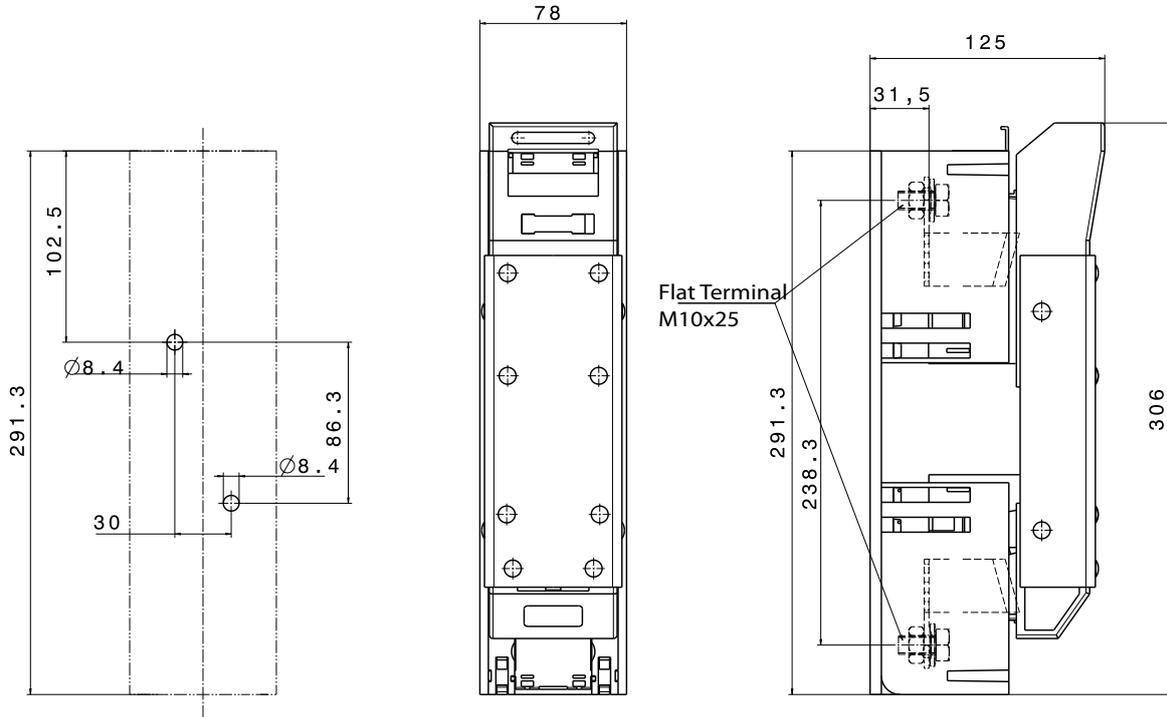

TL3-1/9/1200V

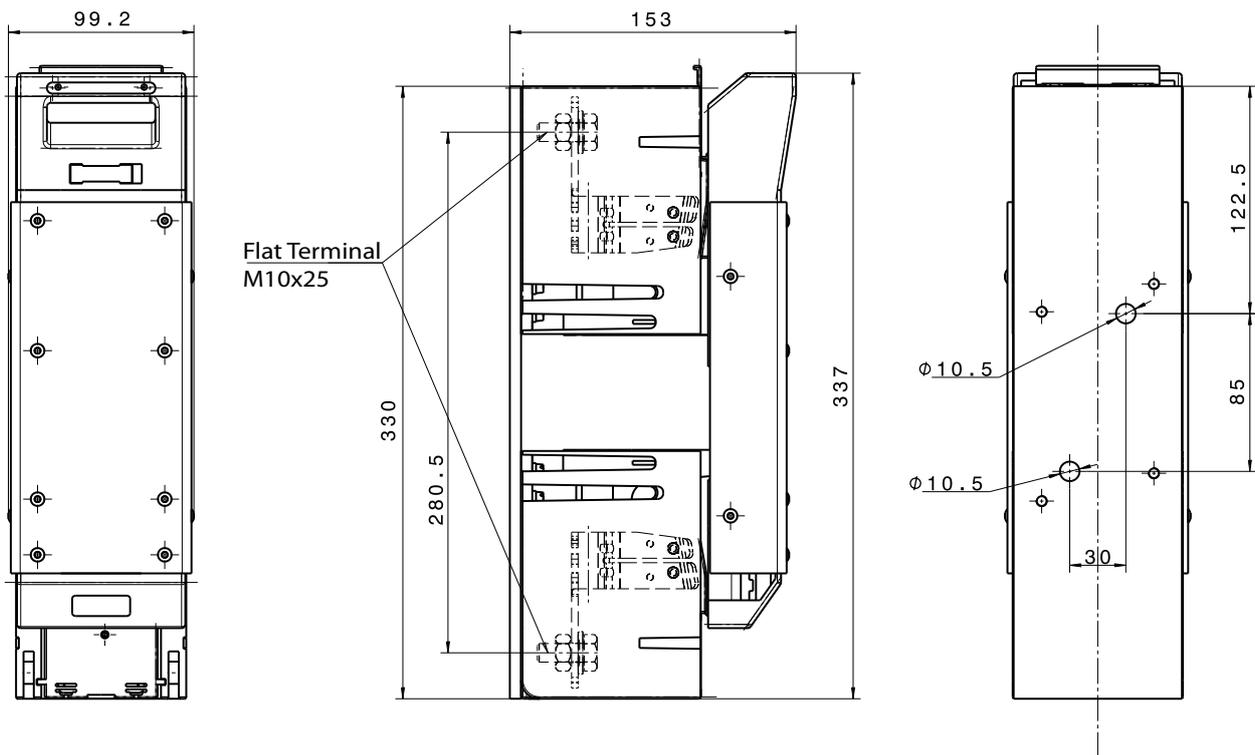

NH strip-fuseways L2,3-2/1500V



General characteristics

Type		L2	L3
For NH fuse-links acc. to IEC 60269-6	Size	2 (extended body)	3 (extended body)
Rated voltage		1500V d.c.	1500V d.c.
Rated current		250A	500A
fuse-link size		1XL, 2XL	3L
Conv. free air thermal current with fuse-links		250A	500A
Rated insulation voltage		1500V d.c.	1500V d.c.
Max. permis. power loss per fuse-link		46W	75W
Cable terminal	Flat terminal	Bolt diameter	M12
		Cable lug (DIN 46235)	1 x 25-240 mm ²
		Flat bar	30x10 mm
		Tightening torque	35-40 Nm
	Clamp KM2G	Clamping cross-section	25-150mm ² /185-300mm ²
		Tightening torque	32 Nm
	Clamp KM2G-F	Clamping cross-section	25-240 mm ²
		Tightening torque	32 Nm
Type of protection - front side, device fitted - with front side strip cover		IP10	IP10
Operating conditions	Ambient temperature*	-25 ... +55	
	Rated operating mode	Cont. operation	
	Actuation	Dependent manual operation	
	Mounting position	Vertical	
	Altitude	≤ 2000 m	
	Pollution degree	3	
Overvoltage category		III	



*35°C normal temperature, 55°C with reduced operating current

NH strip-fuseways L2,3-2/1500V

Type	I _n [A]	Code No.	Max. Connection [mm ²]	Terminal	 g	
L2-2/1500/3A/HA/PV	250	004122039	25-240	Flat terminal M12	3500	1
L2-2/1500/9/KM2G-F/HA/PV	250	004122040	25-240	Steel-frame clamp KM2G-F	3650	1
L3-2/1500/3A/HA/PV	500	004122041	25-240	Flat terminal M12	4110	1
L3-2/1500/9/KM2G-F/HA/PV	500	004122042	25-240	Steel-frame clamp KM2G-F	4260	1

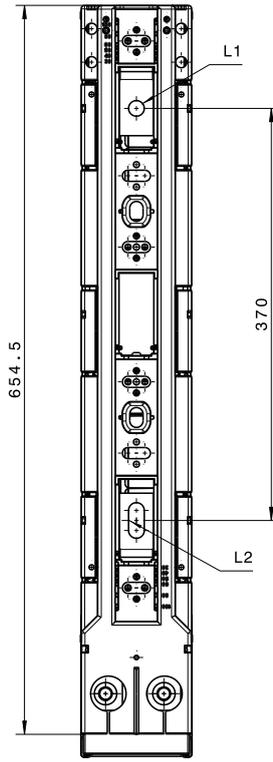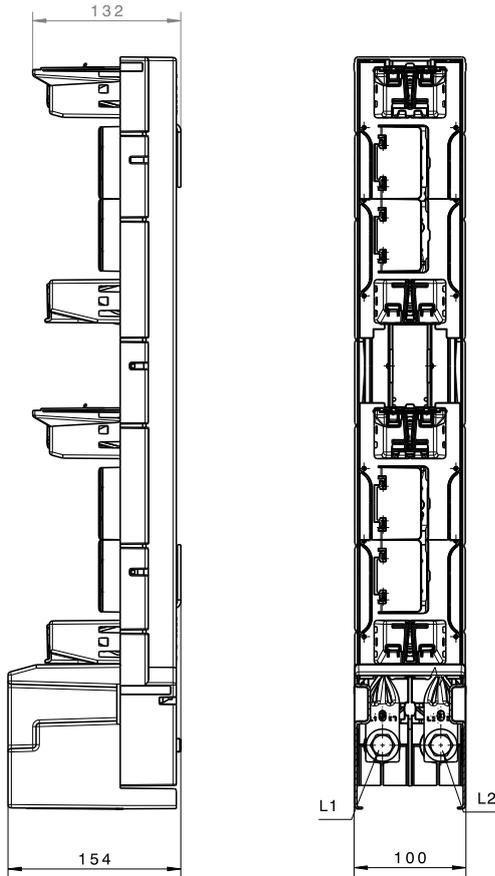

Flat terminal M12

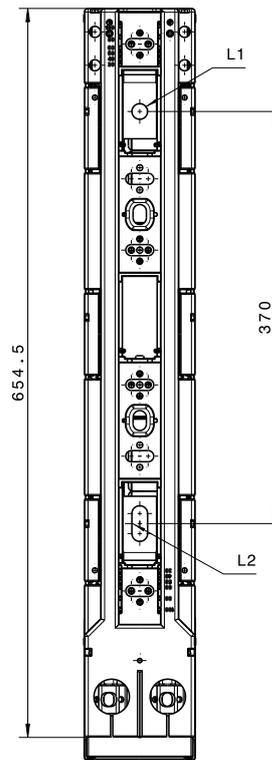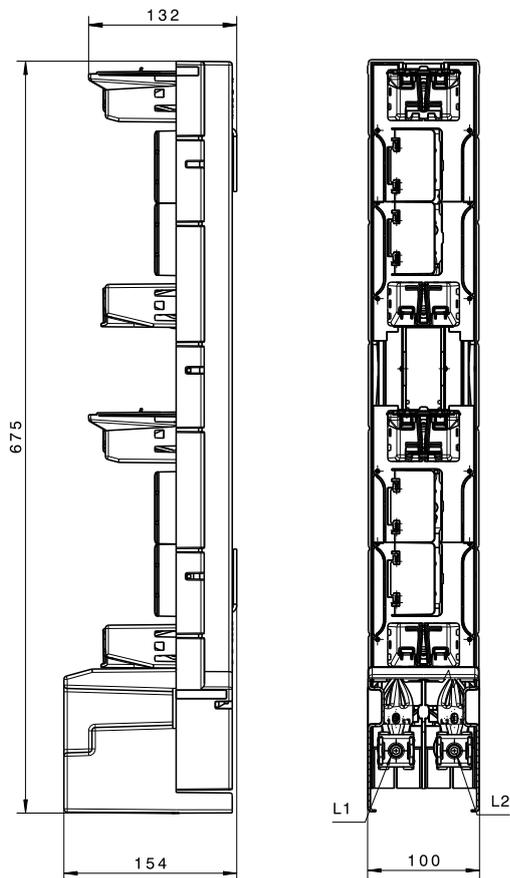

Steel-frame clamp KM2G-F



Horizontal fuse-switch disconnecter type KVL

General characteristics

Size	00									
Technical Characteristics										
Rated operational voltage	U_e	V	400 a.c.	500 a.c.	690 a.c.	800 a.c.	1000 a.c.	250 d.c.	1000 d.c.	
Rated operational current*	I_e	A	160	160	160	63	160	160	160	
Conv. free air thermal current with fuse-links*	I_{th}	A	160							
Conv. free air thermal current with solid-links*	I_{th}	A	210							
Rated frequency	f	Hz	40-60							
Rated insulation voltage	U_i	V	Baseplate mounting 1000 a.c., Busbar mounting 800 a.c.							
Total power loss (without fuse)	P_v	W	1Pole - 3W, 3Pole - 9W							
Power loss at 80% I_m (without fuse-links), **	P_v	W	1Pole - 1,9 W, 3Pole - 5,8 W							
Rated impulse withstand voltage	U_{imp}	kV	8							
Utilization category***			AC-23B	AC-22B	AC-21B	AC-21B	AC-20B	DC-22B	DC-20B	
Rated conditional short-circuit current****		kA	120 (500 a.c.), 100 (690 a.c.), 10 (800 a.c.), 35 (250 d.c.)							
Rated short-time withstand current	I_{cw}	kA	5/1s							
Fuse-links										
Size - DIN VDE 0636-2	-	-	000/00							
Max. permissible power loss per fuse-link	P_a	W	12							
Cable terminal										
Flat terminal-Screw			M8							
Tightening torque	Ma	Nm	12-15							
Clip terminal, Clamping cross-section		mm ²	(SP KVL00) Round conductor: 1,5-70 Cu, Strip conductor: 6 x 9 x 0,8 Cu							
Tightening torque	Ma	Nm	2,6							
Prism Clamp, Clamping cross-section		mm ²	(SP KVL00 P1) 10-70 Al/Cu, 35-95 Al/Cu							
Tightening torque	Ma	Nm	2,6							
Prism Clamp, Clamping cross-section		mm ²								
Tightening torque	Ma	Nm								
Frame clamp, Clamping cross-section		mm ²	1,5-95 Al/Cu, (Al 95: max. 125A), *****							
Torque	Ma	Nm	4,5							
Degree of Protection, front side device										
Front cover closed	-	-	IP20							
Front cover open	-	-	IP10							
With clamp- and lateral cover	-	-	IP2XC							
Operating condition										
Ambient temperature *****	T_{amb}	°C	-25 ... +55							
Operating condition	-	-	Continuous operation							
Mounting	-	-	vertical, horizontal							
Altitude	-	m	≤ 2000							
Pollution degree	-	-	3							
Overvoltage category	-	-	IV							
Endurance										
Mechanical cycles			1600							
Electrical cycles			200							

* Mounting of several units in low voltage switchgear-combinations, please think about rated diversity factors acc. to DIN EN 61439.

** Reference value for replacement of devices acc. to DIN EN 61439-1 clause 10.10.4.2.

*** minimum distance to earthed, conductive parts: Lateral: 20mm/Above: 50mm

**** Type tested with NH fuse-links characteristic gG

***** 35°C Normal temperature, at 55°C with reduced operating current

General characteristics

Size	1										
Technical Characteristics											
Rated operational voltage	U_e	V	400 a.c.	500 a.c.	690 a.c.	800 a.c.	1000 a.c.	250 d.c.	440 d.c. [‡]	1000 d.c.	
Rated operational current*	I_e	A	250	250	250	250	250	250	250	250	
Conv. free air thermal current with fuse-links*	I_{th}	A	250								
Conv. free air thermal current with solid-links*	I_{th}	A	350								
Rated frequency	f	Hz	40-60								
Rated insulation voltage	U_i	V	Baseplate mounting 1000 a.c., Busbar mounting 800 a.c.								
Total power loss (without fuse)	P_v	W	1Pole - 5W, 3Pole - 15W								
Power loss at 80% I_m (without fuse-links), **	P_v	W	1Pole - 3,2 W, 3Pole - 9,6 W								
Rated impulse withstand voltage	U_{imp}	kV	8								
Utilization category***			AC-23B	AC-22B	AC-21B	AC-21B	AC-20B	DC-22B	DC-21B	DC-20B	
Rated conditional short-circuit current****		kA	120 (500 a.c.), 100 (690 a.c.), 10 (800 a.c.), 35 (440 d.c.)								
Rated short-time withstand current	I_{cw}	kA	8,6/1s								
Fuse-links											
Size - DIN VDE 0636-2	-	-	1								
Max. permissible power loss per fuse-link	P_a	W	23								
Cable terminal											
Flat terminal-Screw			M10								
Tightening torque	M_a	Nm	30-35								
Clip terminal, Clamping cross-section		mm ²	0(SP KVL1)								
			Round conductor: 25-150 Cu, Strip conductor: 6 x 16 x 0,8 Cu0								
Tightening torque	M_a	Nm	9,5								
Prism Clamp, Clamping cross-section		mm ²	0(SP KVL1 P1)								
			10-150 Al/Cu0								
Tightening torque	M_a	Nm	4,5								
Prism Clamp, Clamping cross-section		mm ²	(SP KVL1 P2); 2 x (10-150) Al/Cu								
Tightening torque	M_a	Nm	4,5								
Frame clamp, Clamping cross-section		mm ²	35-150 Al/Cu								
Torque	M_a	Nm	12								
Degree of Protection, front side device											
Front cover closed	-	-	IP20								
Front cover open	-	-	IP10								
With clamp- and lateral cover	-	-	IP2XC								
Operating condition											
Ambient temperature *****	T_{amb}	°C	-25 ... +55								
Operating condition	-	-	Continuous operation								
Mounting	-	-	vertical, horizontal								
Altitude	-	m	≤ 2000								
Pollution degree	-	-	3								
Overvoltage category	-	-	IV								
Endurance											
Mechanical cycles			1600								
Electrical cycles			200								

* Mounting of several units in low voltage switchgear-combinations, please think about rated diversity factors acc. to DIN EN 61439.

** Reference value for replacement of devices acc. to DIN EN 61439-1 clause 10.10.4.2.

*** minimum distance to earthed, conductive parts: Lateral: 20mm/Above: 50mm

**** Type tested with NH fuse-links characteristic gG

***** 35°C Normal temperature, at 55°C with reduced operating current

3-pole only

General characteristics

Size	2								
Technical Characteristics									
Rated operational voltage	U_e	V	400 a.c.	500 a.c.	690 a.c.	1000 a.c.	250 d.c.	440 d.c.#	1000 d.c.
Rated operational current*	I_e	A	400	400	400	400	400	400	400
Conv. free air thermal current with fuse-links*	I_{th}	A	400						
Conv. free air thermal current with solid-links*	I_{th}	A	500						
Rated frequency	f	Hz	40-60						
Rated insulation voltage	U_i	V	Baseplate mounting 1000 a.c. , Busbar mounting 1000 a.c.						
Total power loss (without fuse)	P_v	W	1Pole - 9W, 3Pole - 28W						
Power loss at 80% I_m (without fuse-links), **	P_v	W	1Pole - 6 W, 3Pole - 17,9 W						
Rated impulse withstand voltage	U_{imp}	kV	8						
Utilization category***			AC-23B	AC-22B	AC-21B	AC-20B	DC-22B	DC-22B	DC-20B
Rated conditional short-circuit current****		kA	120 (500 a.c.), 100 (690 a.c.), 35 (440 d.c.)						
Rated short-time withstand current	I_{cw}	kA	15/1s						
Fuse-links									
Size - DIN VDE 0636-2	-	-	2						
Max. permissible power loss per fuse-link	P_a	W	34						
Cable terminal									
Flat terminal-Screw			M10						
Tightening torque	M_a	Nm	30-35						
Clip terminal, Clamping cross-section		mm ²	0(SP KVL2) Round conductor: 25-185 Cu , Strip conductor: 10 x 16 x 0,8 Cu0						
Tightening torque	M_a	Nm	23,0						
Prism Clamp, Clamping cross-section		mm ²	0(SP KVL2 P1) 120-240 Al/Cu0						
Tightening torque	M_a	Nm	11						
Prism Clamp, Clamping cross-section		mm ²	(SP KVL2 P2); 2 x (120-150) Al/Cu						
Tightening torque	M_a	Nm	11						
Frame clamp, Clamping cross-section		mm ²	95-300 Al/Cu						
Torque	M_a	Nm	20						
Degree of Protection, front side device									
Front cover closed	-	-	IP20						
Front cover open	-	-	IP10						
With clamp- and lateral cover	-	-	IP2XC						
Operating condition									
Ambient temperature *****	T_{amb}	°C	-25 ... +55						
Operating condition	-	-	Continuous operation						
Mounting	-	-	vertical, horizontal						
Altitude	-	m	≤ 2000						
Pollution degree	-	-	3						
Overvoltage category	-	-	IV						
Endurance									
Mechanical cycles			1000						
Electrical cycles			200						

* Mounting of several units in low voltage switchgear-combinations, please think about rated diversity factors acc. to DIN EN 61439.

** Reference value for replacement of devices acc. to DIN EN 61439-1 clause 10.10.4.2.

*** minimum distance to earthed, conductive parts: Lateral: 20mm/Above: 50mm

**** Type tested with NH fuse-links characteristic gG

***** 35°C Normal temperature, at 55°C with reduced operating current

3-pole only

General characteristics

Size	3										
Technical Characteristics											
Rated operational voltage	U_e	V	400 a.c.	500 a.c.	690 a.c.	800 a.c.	1000 a.c.	250 d.c.	440 d.c. [#]	1000 d.c.	
Rated operational current*	I_e	A	630	630	630	315	630	630	630	630	
Conv. free air thermal current with fuse-links*	I_{th}	A	630								
Conv. free air thermal current with solid-links*	I_{th}	A	785								
Rated frequency	f	Hz	40-60								
Rated insulation voltage	U_i	V	Baseplate mounting 1000 a.c. , Busbar mounting 1000 a.c.								
Total power loss (without fuse)	P_v	W	1Pole - 17W, 3Pole - 51W								
Power loss at 80% I_n (without fuse-links), **	P_v	W	1Pole - 10,9 W, 3Pole - 32,6 W								
Rated impulse withstand voltage	U_{imp}	kV	8								
Utilization category***			AC-23B	AC-22B	AC-21B	AC-21B	AC-20B	DC-22B	DC-22B	DC-20B	
Rated conditional short-circuit current****		kA	120 (500 a.c.), 100 (690 a.c.), 10 (800 a.c.), 35 (440 d.c.)								
Rated short-time withstand current	I_{cw}	kA	15/1s								
Fuse-links											
Size - DIN VDE 0636-2	-	-	3								
Max. permissible power loss per fuse-link	P_a	W	48								
Cable terminal											
Flat terminal-Screw			M10 / M12								
Tightening torque	M_a	Nm	30-35								
Clip terminal, Clamping cross-section		mm ²	(SP KVL3) Strip conductor: 11 x 21 x 1 Cu								
Tightening torque	M_a	Nm	23								
Prism Clamp, Clamping cross-section		mm ²	(SP KVL3 P1); 120-300 Al/Cu								
Tightening torque	M_a	Nm	11								
Prism Clamp, Clamping cross-section		mm ²	(SP KVL3 P2); 2 x (120-240) Al/Cu								
Tightening torque	M_a	Nm	11								
Frame clamp, Clamping cross-section		mm ²	95-300 Al/Cu								
Torque	M_a	Nm	20								
Degree of Protection, front side device											
Front cover closed	-	-	IP20								
Front cover open	-	-	IP10								
With clamp- and lateral cover	-	-	IP2XC								
Operating condition											
Ambient temperature *****	T_{amb}	°C	-25 ... +55								
Operating condition	-	-	Continuous operation								
Mounting	-	-	vertical, horizontal								
Altitude	-	m	≤ 2000								
Pollution degree	-	-	3								
Overvoltage category	-	-	IV								
Endurance											
Mechanical cycles			1000								
Electrical cycles			200								

* Mounting of several units in low voltage switchgear-combinations, please think about rated diversity factors acc. to DIN EN 61439.

** Reference value for replacement of devices acc. to DIN EN 61439-1 clause 10.10.4.2.

*** minimum distance to earthed, conductive parts: Lateral: 20mm/Above: 50mm


**** Type tested with NH fuse-links characteristic gG

***** 35°C Normal temperature, at 55°C with reduced operating current

3-pole only

3-pole, Baseplate mounting

Size	Code No.	Type	 g	
00	001690870	KVL-00 3p M8-M8	630	1
	001690871	KVL-00 3p BC95-BC95	670	1
1	001690872	KVL-1 3p M10-M10	2030	1
2	001690873	KVL-2 3p M10-M10	3420	1
3	001690874	KVL-3 3p M10-M10	3950	1



BC95-BC95



1-pole, Baseplate mounting

Size	Code No.	Type	 g	
00	001690890	KVL-00 1p M8-M8	310	2
1	001690891	KVL-1 1p M10-M10	930	1
3	001690892	KVL-3 1p M10-M10	1570	1



2-pole, Baseplate mounting

Size	Code No.	Type	 g	
00	001690895	KVL-00 2p M8-M8	720	1
1	001690896	KVL-1 2p M10-M10	1880	1
3	001690897	KVL-3 2p M10-M10	3190	1



4-pole, Baseplate mounting

Size	Code No.	Type	 g	
00	001690900	KVL-00 4p M8-M8	1190	1
1	001690901	KVL-1 4p M10-M10	2910	1
3	001690902	KVL-3 4p M10-M10	5760	1



Accessories

Type	Code No.	Description	
SP KVL00	001692701	Clip terminal, 1,5 – 70 mm ² Cu	set=3
SP KVL1	001692702	Clip terminal, 25– 150 mm ² Cu	set=3
SP KVL2	001692703	Clip terminal, 25– 240 mm ² Cu	set=3
SP KVL3	001692704	Clip terminal, 11x21 mm ² Cu	set=3
SP KVL00 P1	001692760	Prism clamp, 10 – 70 mm ² Al/Cu	set=3
SP KVL1 P1	001692761	Prism clamp, 70 – 150 mm ² Al/Cu	set=3
SP KVL2 P1	001692762	Prism clamp, 120 – 240 mm ² Al/Cu	set=3
SP KVL3 P1	001692763	Prism clamp, 120 – 300 mm ² Al/Cu	set=3
SP KVL1 P2	001692764	Prism clamp for 2-conductors connection, 2x70 – 95 mm ² Al/Cu	set=3
SP KVL2 P2	001692765	Prism clamp for 2-conductors connection, 2x120 – 150 mm ² Al/Cu	set=3
SP KVL3 P2	001692766	Prism clamp for 2-conductors connection, 2x120 – 240 mm ² Al/Cu	set=3
SP KVL-1 V	001690940	Frame clamp, 35-150mm ² Al/Cu	set=3
SP KVL-23 V	001690941	Frame clamp, 95-300mm ² Al/Cu	set=3
SP KVL-00 FC95	001690942	Feeding clamp, 25-95mm ² Cu/Al, isolated, terminal M8,*	set=3
I2Z KVL-00 3p	001690943	Phase busbars, 2 x 3pole KVL-00 50mm ²	5
I23 KVL-00 3p	001690944	Phase busbars, 3 x 3pole KVL-00 50mm ²	5
I24 KVL-00 3p	001690945	Phase busbars, 4 x 3pole KVL-00 50mm ²	3
I25 KVL-00 3p	001690946	Phase busbars, 5 x 3pole KVL-00 50mm ²	3
MST KVL-00 1p	001690947	Switch position indicator, 1-pole, size 00, **	1
MST KVL-00 3p	001690948	Switch position indicator, 3-pole, size 00, **	1
MST KVL-123 1p/2p/3p	001690949	Switch position indicator, 1/2/3 -pole, size 1, 2, 3, **	1
MFM KVL-00 1p/2p/3p	001690950	Mechanical fuse monitor, size 00, **	3
MFM KVL-123 1p/2p/3p	001690951	Mechanical fuse monitor, size 1, 2, 3, **, ****	3
PRS KVL-00 3p L	001690952	Terminal cover, 3-pole, variable to open, Length 66mm, size 00	2
PRS KVL-00 3p S	001690953	Terminal cover, 3-pole, variable to open, Length 36mm, size 00	2
PRS KVL-1 3p	001690954	Terminal cover, 3-pole, variable to open, Length 42mm, size 1	2
PRS KVL-2 3p	001690955	Terminal cover, 3-pole, variable to open, Length 42mm, size 2	2
PRS KVL-3 3p	001690956	Terminal cover, 3-pole, variable to open, Length 42mm, size 3	2
PRS KVL-00 1p L	001690957	Terminal cover, 1-pole, variable to open, Length 66mm, size 00	2
PRS KVL-00 1p S	001690958	Terminal cover, 1-pole, variable to open, Length 36mm, size 00	2
PRS KVL-1 1p	001690959	Terminal cover, 1-pole, variable to open, Length 42mm, size 1	2
PRS KVL-3 1p	001690960	Terminal cover, 1-pole, variable to open, Length 42mm, size 3	2
DIN KVL-00 100-150	001690964	DIN rail fixing parts, For mounting on DIN rails, size 00	1
DIN KVL-1 100-150	001690965	DIN rail fixing parts, For mounting on DIN rails, size 1	1
EFMU KVL-00 3p	001690966	Electronic fuse monitoring unit, 3-pole, size 00, ****	1
EFMU KVL-1 3p	001690967	Electronic fuse monitoring unit, 3-pole, size 1, ****	1
EFMU KVL-2 3p	001690968	Electronic fuse monitoring unit, 3-pole, size 2, ****	1
EFMU KVL-3 3p	001690969	Electronic fuse monitoring unit, 3-pole, size 3, ****	1
MPF MU KVL-00 3p	001690974	Elektromechanical fuse monitoring unit (AM), 3-pole, size 00, ****	1
MPF MU KVL-1 3p	001690975	Elektromechanical fuse monitoring unit (AM), 3-pole, size 1, ****	1
MPF MU KVL-2 3p	001690976	Elektromechanical fuse monitoring unit (AM), 3-pole, size 2, ****	1
MPF MU KVL-3 3p	001690977	Elektromechanical fuse monitoring unit (AM), 3-pole, size 3, ****	1
CK KVL-00 2p/4p	001690970	Connecting kit 2- and 4-pole, For making of 2- and 4-pole disconnectors, size 00	1
CK KVL-123 2p/4p	001690971	Connecting kit 2- and 4-pole, For making of 2- and 4-pole disconnectors, size 1, 2, 3	1
LP KVL-00123	001690972	Interlock device, locking with padlock, diameter 6mm max., size 00, 1, 2, 3	10
IC KVL-00123	001690973	Contact cover interlock, only be operated by tool, size 00-3	10

* Feeding clamp, AC690V/DC1000V-250A

** 1 Changeover, AC250V, 10/3A (ohmic/ind.)

*** Only in combination with ETI fuse-links with striker-pin; not in combination with frame-clamp or 2-wire-prism clamp.

**** For monitoring of fuse-links with live gripping lugs



SP KVL



SP KVL...P1



DIN KVL-00 100-150



SP KVL-1 V



SP KVL-23 V



SP KVL-00 FC95



I2Z KVL-00 3p





MST KVL- ...





MFM KVL-123 1p 2p 3p




PRS KVL-... 3p

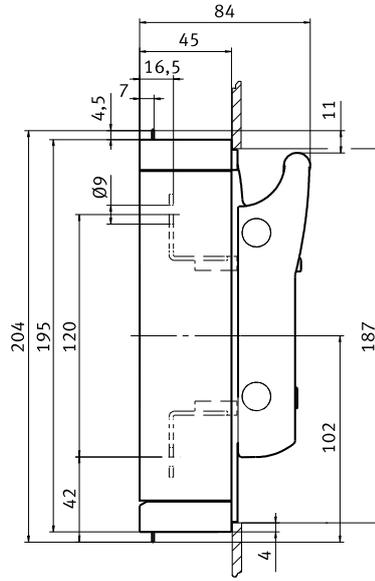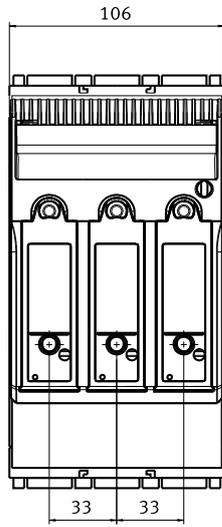


KVL-00 3p M8-M8
KVL-00 3p BC95-BC95
KVL-00 3p M8-M8 LED
KVL-00 3p BC95-BC95 LED

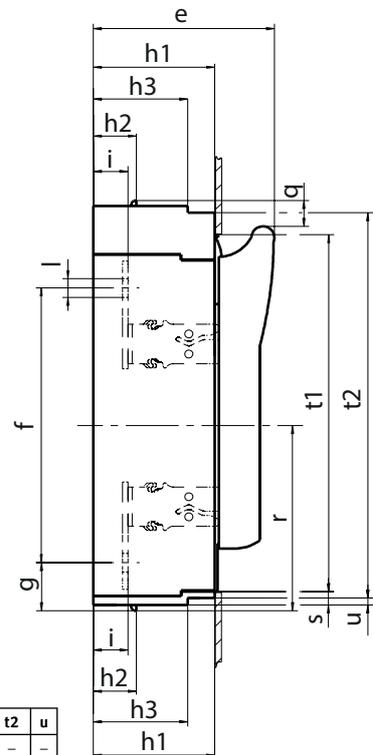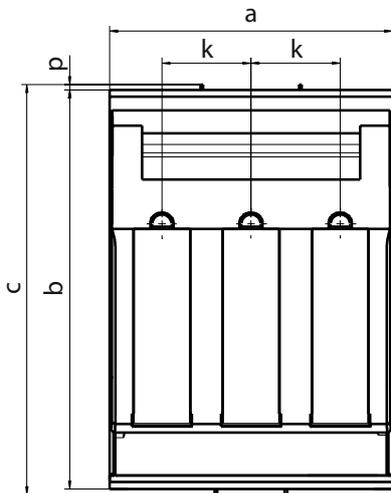


	a	b	c	e	f	g	h1	h2	h3	i	k	l	p	q	r	s	t1	t2	u
KVL-1 3p M10-M10 (LED)	184	298	306	117	185	46	70	32	-	25	58	Ø10,5	4	19	138	5	272	-	-
KVL-2 3p M10-M10 (LED)	210	298	306	134	205	36	90	32	70	26	66	Ø14	4	19	138	10	268	288	5
KVL-3 3p M10-M10 (LED)	250	298	306	143	205	36	90	32	70	26	82	Ø14	4	19	138	10	268	288	5

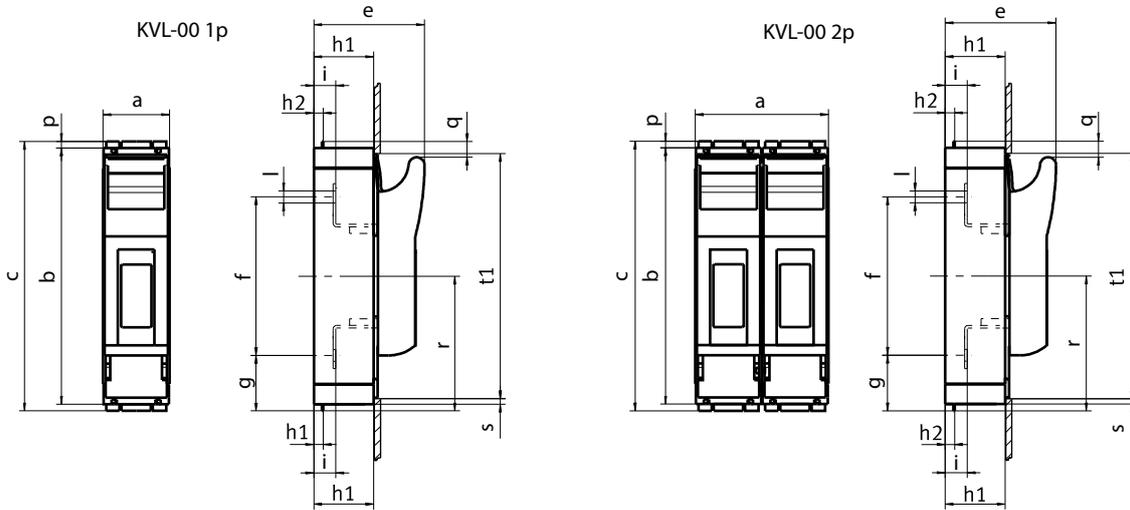


	a	b	c	e	f	g	h1	h2	h3	i	l	p	q	r	s	t1
KVL-00 1p M8-M8	50	195	204	84	120	42	45	7	-	16,5	∅9	4,5	12	102	5	187
KVL-00 2p M8-M8	100	195	204	84	120	42	45	7	-	16,5	∅9	4,5	12	102	5	187

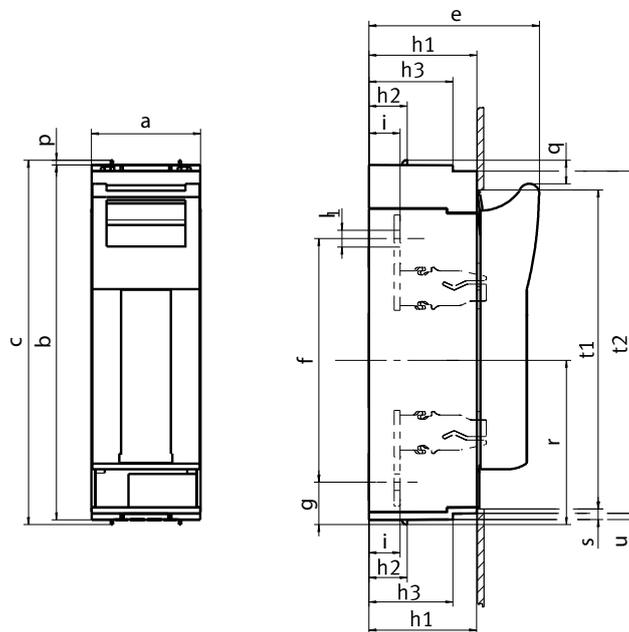


	a	b	c	e	f	g	h1	h2	h3	i	l	p	q	r	s	t1	t2	u
KVL-1 1p M10-M10	69	298	306	117	185	46	70	32	-	25	∅10,5	4	19	138	5	272	-	-
KVL-3 1p M10-M10	91	298	306	143	205	36	90	32	70	26	∅14	4	19	138	10	268	288	5

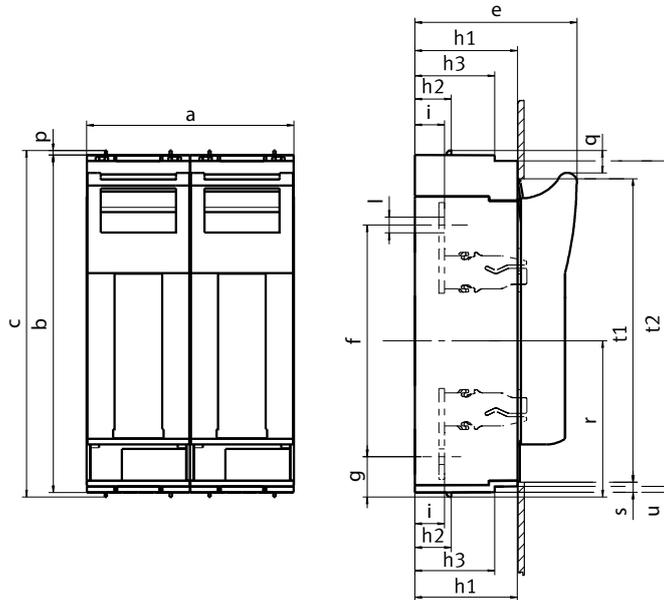

	a	b	c	e	f	g	h1	h2	h3	i	l	p	q	r	s	t1	t2	u
KVL-1 2p M10-M10	138	298	306	117	185	46	70	32	-	25	∅10,5	4	19	138	5	272	-	-
KVL-3 2p M10-M10	182	298	306	143	205	36	90	32	70	26	∅14	4	19	138	10	268	288	5

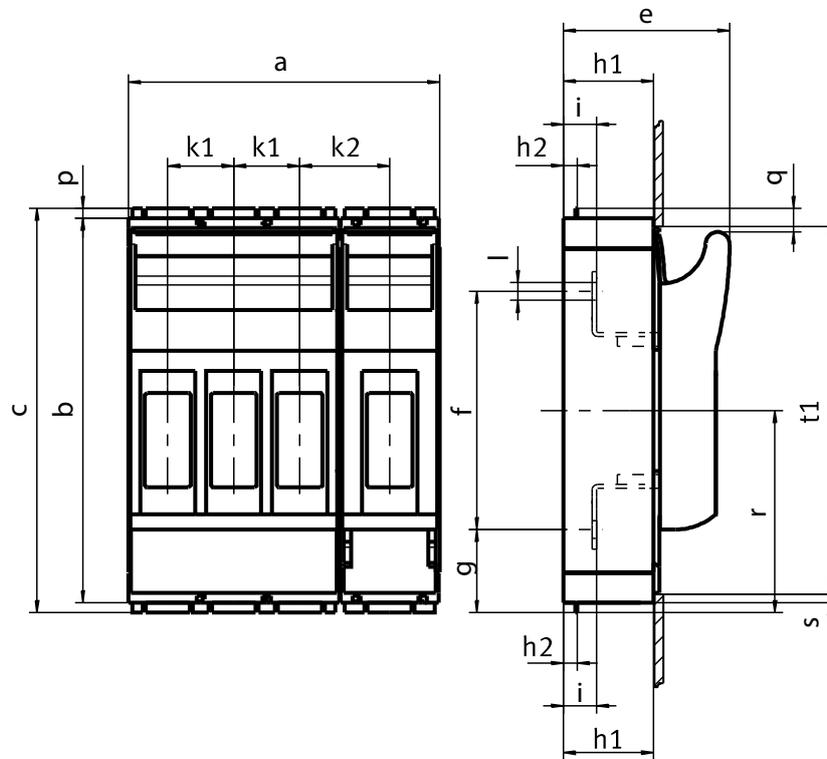

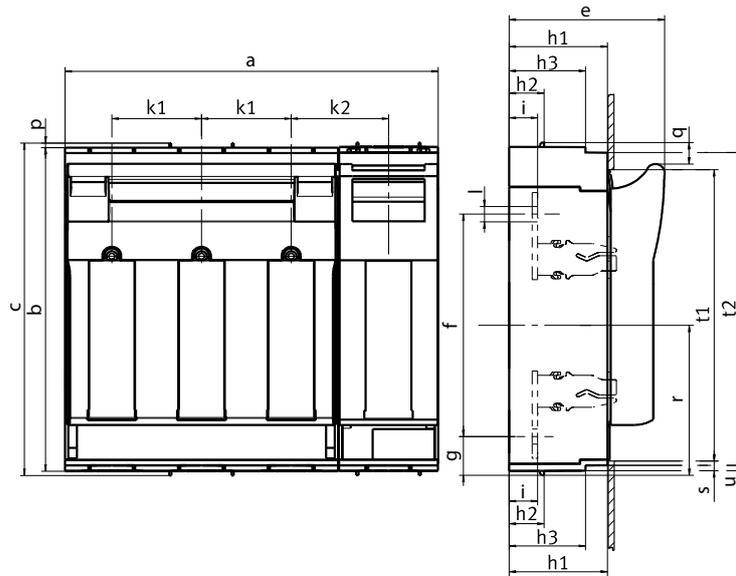

	a	b	c	e	f	g	h1	h2	h3	k1	k2	i	l	p	q	r	s	t1	t2	u
KVL-1 4p	254	298	306	117	185	46	70	32	-	58	69	25	∅10,5	4	19	138	5	272	-	-
KVL-3 4p	341,5	298	306	143	205	36	90	32	70	82	89	26	∅14	4	19	138	10	268	288	5

Technical data - Feeding clamps

Technical Characteristics			
Max. electrical load			690V a.c. / 1000V d.c. -250A
Heat deflection temp.			125°C UL94: V0
Comparative tracking index			600
Cross sections			
Conductor - Max. Diameter ∅14 mm			
single wire		mm ²	25 - 95
multi wire		mm ²	25 - 95
fine wire (with end sleeve)		mm ²	25 - 70
Torque	Ma	Nm	13
Degree of protection			IP20
Regulations			EN 60998-1:2004; EN 60998-2:2004; EN 60999-1:2000; EN 60999-2:2003



Important

This Terminal is suitable for Al and Cu conductors. Please pay attention to the common handling guidelines when connecting the Aluminium conductors. Clean and brush the contact surfaces and lubricate them with an appropriate grease.


Technical data - Phase busbars

Technical Characteristics			
Rated operational voltage		mm ²	50
Impulse voltage strenght		kV	≥8,5
Min. air distance		mm	>8
Min. creeping distance		mm	>9
Max. operating voltage		V	AC690
Protection class			IP20
Short circuit rating			$I_{pk} = 25kA/0,1s$, Surge energy capacity $I_{pk} I_{cc} 100kA - NH3 355A gG 500V$
Dielectric strenght		kV/mm	≥32
Capacity at 35°C ambient temperature depending of feeding point cross section		mm ²	50
Busbar lenght		mm	Max. 300
Feeding at beginning/ending			
Max. current Is /Phase		A	250
Connection cross current		mm ²	95
Other feedings			
Max. feeding current Ie /Phase		A	250
Connection cross current		mm ²	95
Insulation coordination			III / 2
Regulations			IEC 60947-1:2007


GREEN PROTECT / Fuse bases for NH DC fuse-links

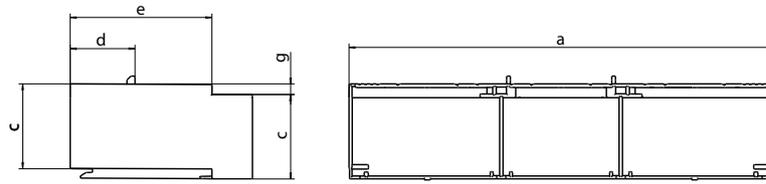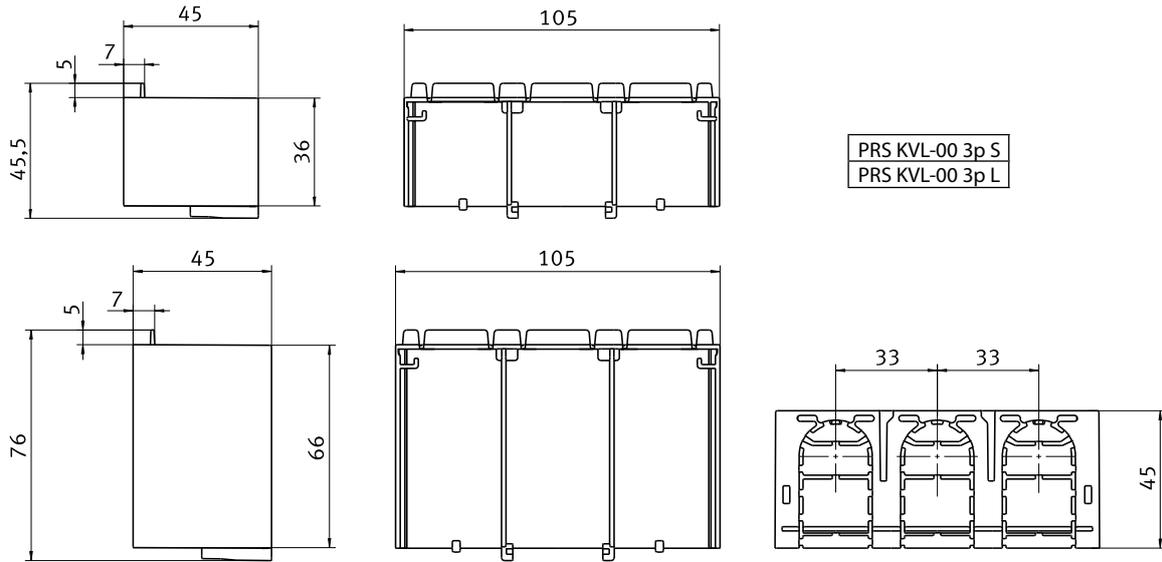


	a	b	c	d	e	f	g
PRS KVL-1 3p	184	70	42	32	-	58	-
PRS KVL-2 3p	210	90	42	32	70	66	5
PRS KVL-3 3p	250	90	42	32	70	82	5

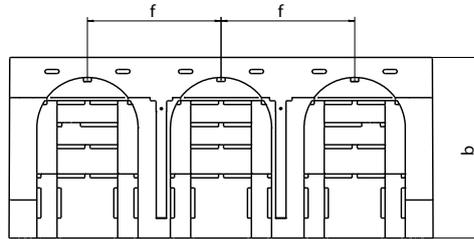

PRS KVL-00 1p L

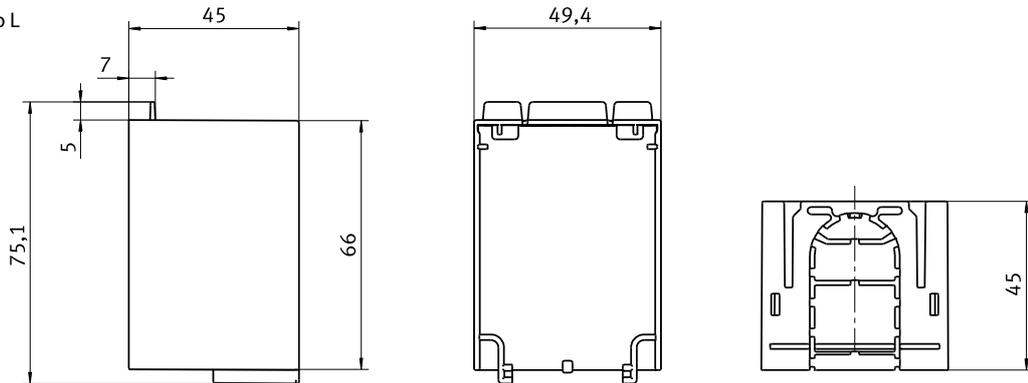


PRS KVL-00 1p S

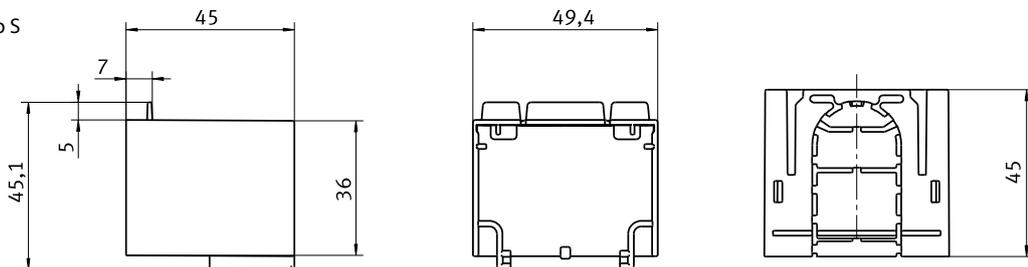


GREEN PROTECT / Fuse bases for NH DC fuse-links

PRS KVL-1 1p

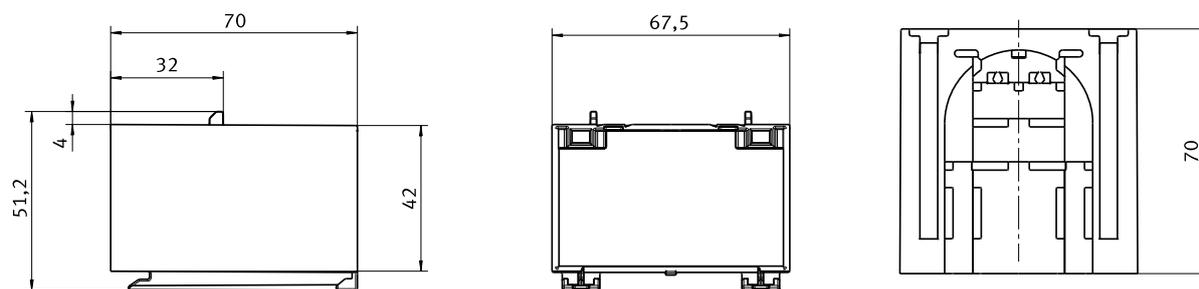

PRS KVL-3 1p

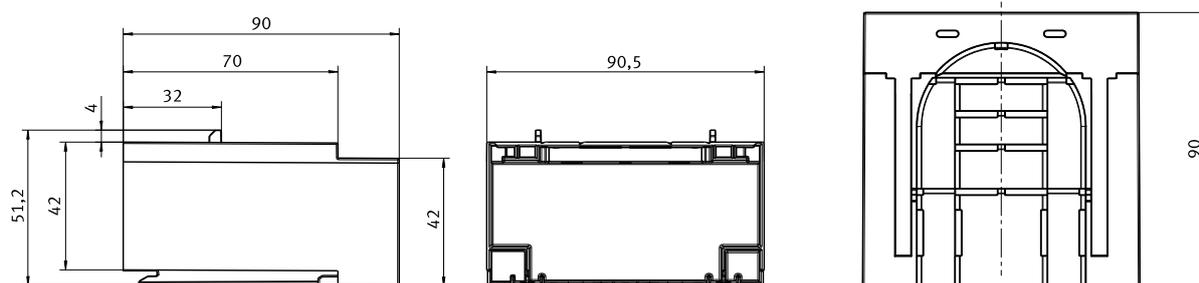

Fuse-switch disconnecter type SL 800V

General characteristics


Size			SL00/100	SL00/185	SL1	SL3
Technical Characteristics						
Rated operational voltage	U_e	V	800 a.c.	800 a.c.	800 a.c.	800 a.c.
Rated operational current	I_e	A	160	160	250	630
Rated frequency	f	Hz	40-60	40-60	40-60	40-60
Rated insulation voltage	U_i	V	800 a.c.	800 a.c.	1000 a.c.	1000 a.c.
Total power loss at I_n (without fuse)	P_v	W	18	23	23	115
Utilisation category			AC-21B (160A/800V)	AC-21B (160A/800V)	AC-21B (250A/800V)	AC-21B (315A/800V)
Fuse-links						
Size - DIN 43620, IEC 60269-2	-	-	000/00		1	3
Max. permissible power loss per fuse-link	P_a	W	12		32	48
Dimensions						
Mass	-	kg	100mm=0,85	185mm=1,79	4,66	5,48
Bubars (distance)	-	mm	100	185	185	185
Cable connection						
Screw			M8		M10	M12
Protection						
Operational state	-	-	IP30		IP30	IP30
Cover open	-	-	IP10		IP10	IP10
Operating condition						
Ambient temperature	T_{amb}	°C	-25 ... +55		-25 ... +55	-25 ... +55
Operating condition	-	-	Continuous operation			
Mounting	-	-	vertical, horizontal			
Altitude	-	m	≤ 2000			
Pollution degree	-	-	3			
Overvoltage category	-	-	III	III	III	III

SL 800V


Size	Code No.	Busbar system	Type	Connection description		
00	001690860	100	SL00/100 3P M8 800AC	flat connection – screw M8	850	1
	001690861	185	SL00 3P M8 800AC	flat connection – screw M8	1790	1
1	001690862	185	SL1 3P M10 800AC	flat connection – screw M10	4660	1
3	001690863	185	SL3 3P M12 800AC	flat connection – screw M12	5480	1




GREEN PROTECT / Fuse bases for NH DC fuse-links

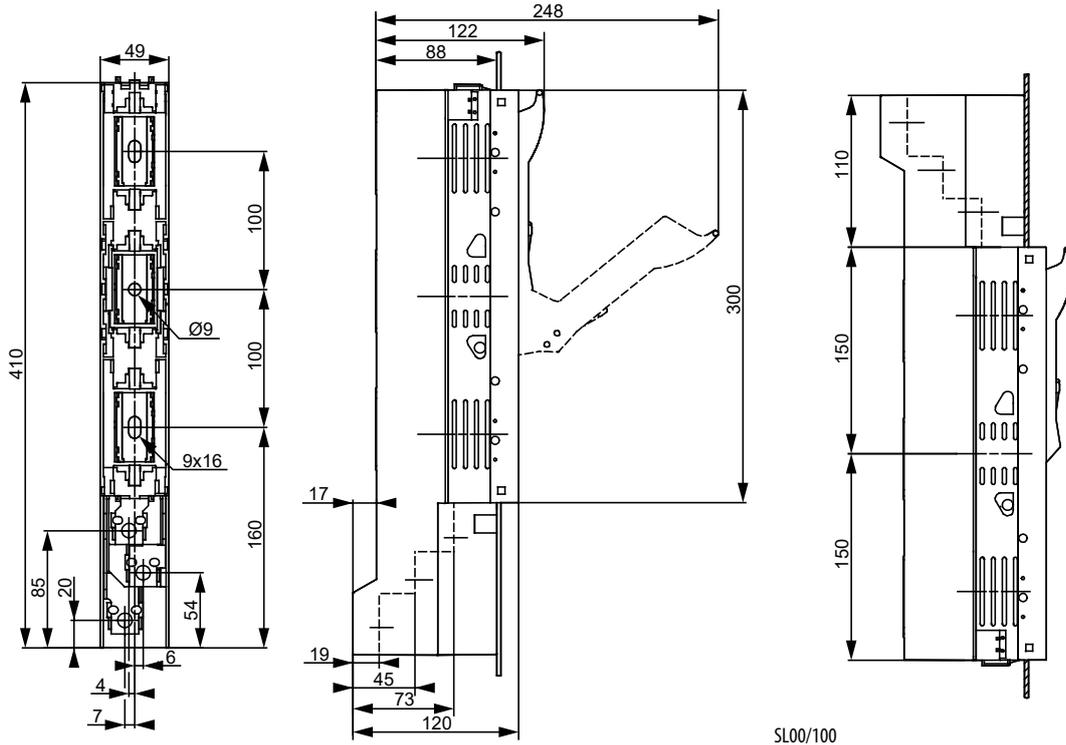

SL00/100

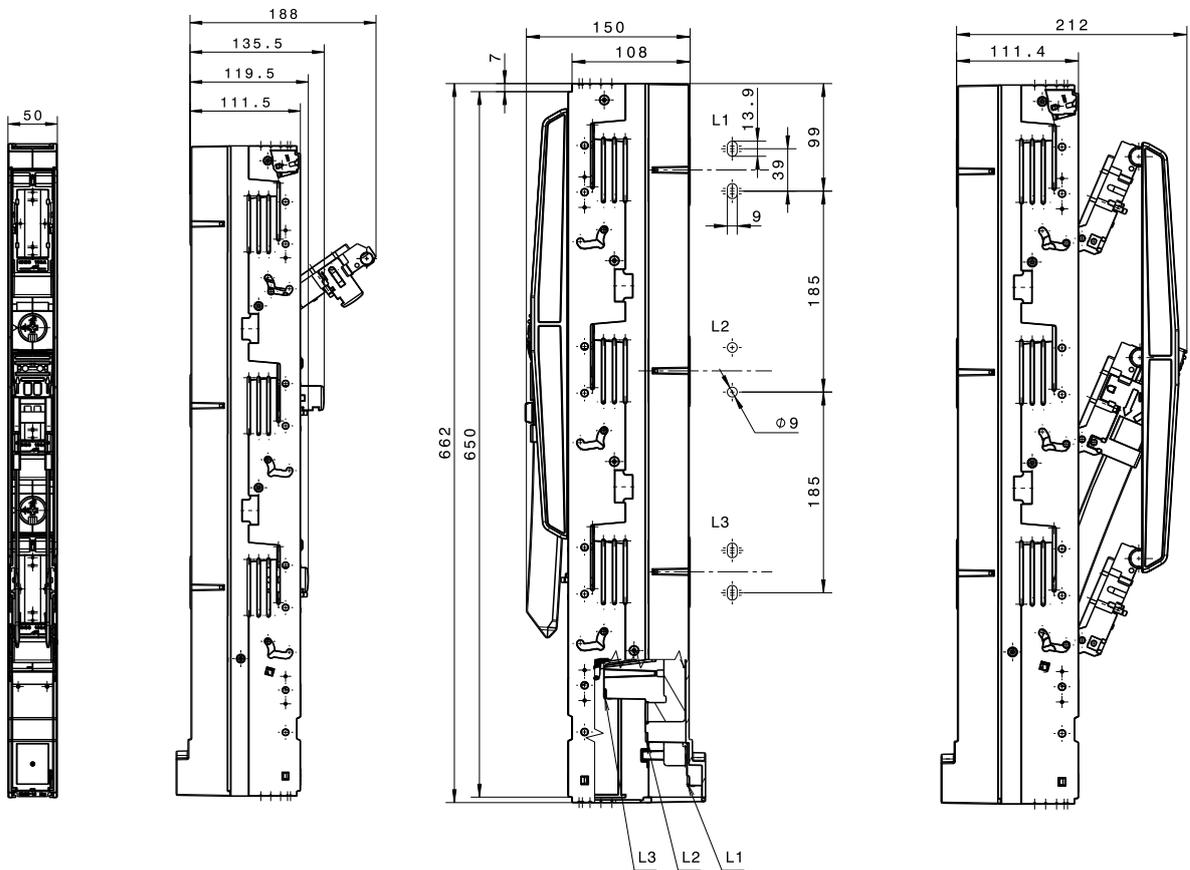

SL00/185



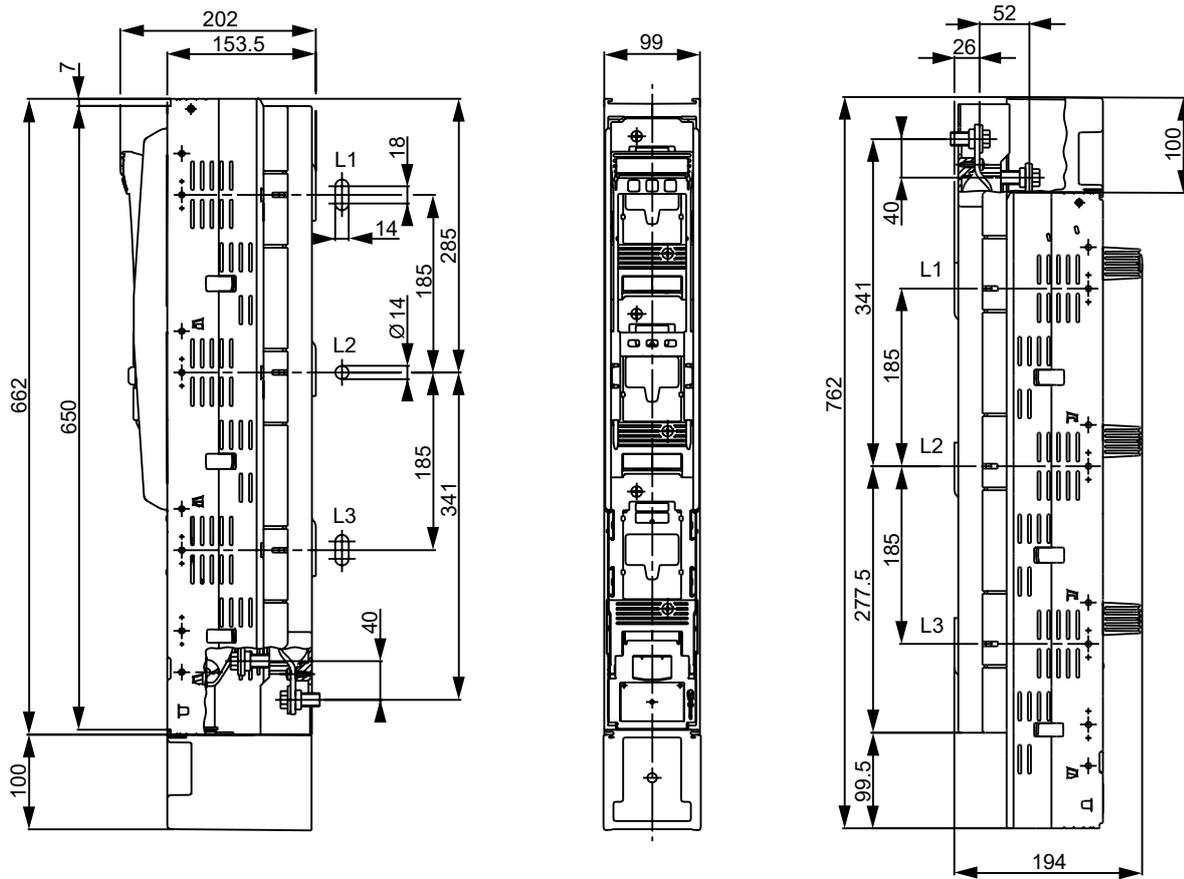


SL1, SL3

NH handle

NH handle for fuse-link DC 1100V and DC 1500V

Code	Type	 g	
001691062	GPN 1500	590	1

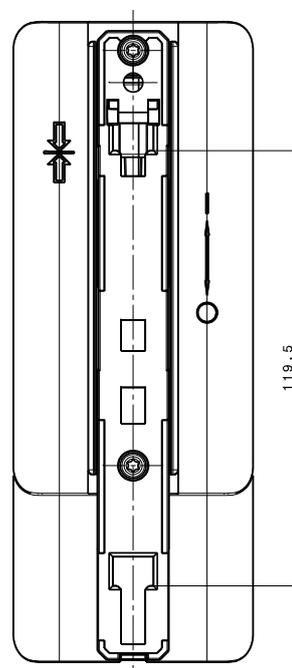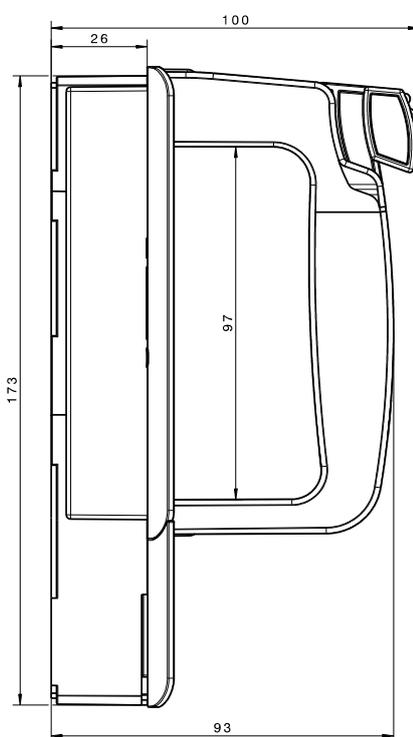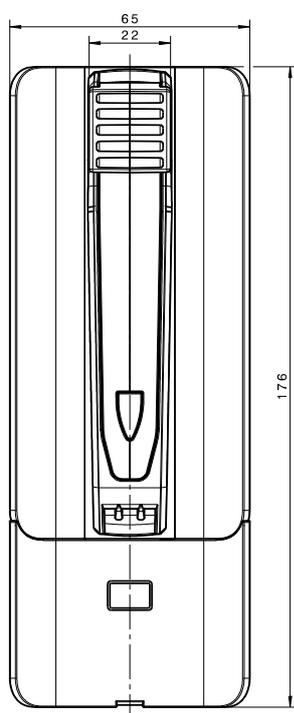

OVERVOLTAGE PROTECTION FOR PV SYSTEMS




 etigroup
www.etigroup.eu

**Lightning and Surge
Arresters ETITEC**

ETI
SWITCH TO
A SAFE FUTURE

Overvoltage protection selection

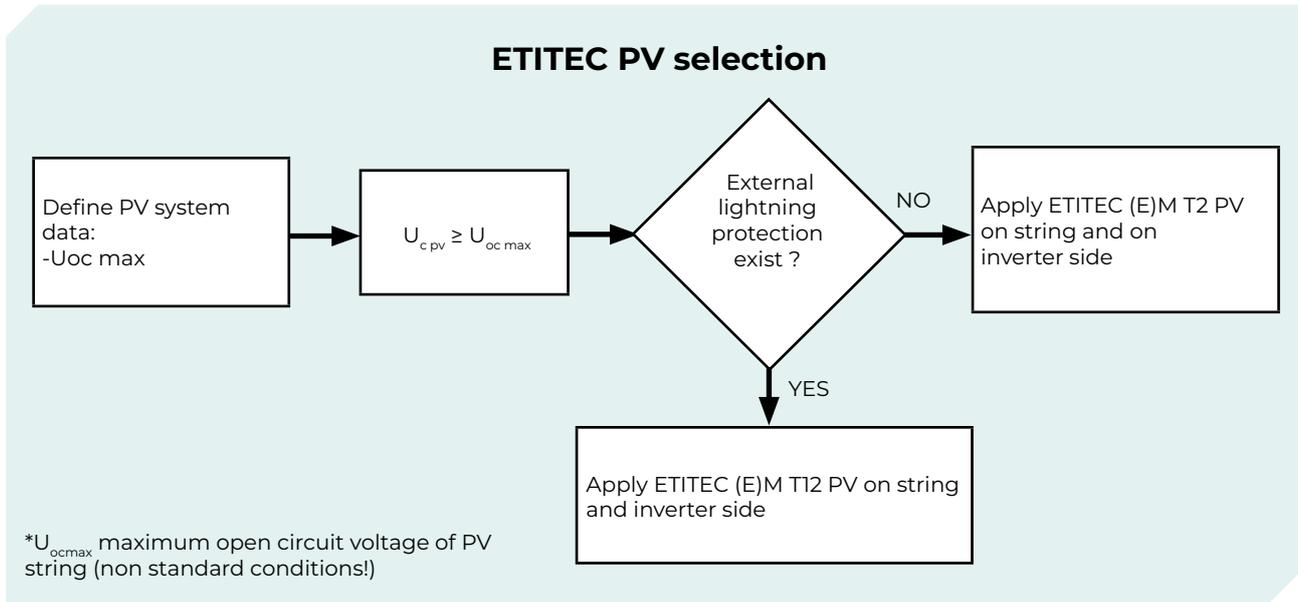

PV surge arrester comparison according to IEC/EN 61643-31:2018

Type	ETITEC M T12 PV		ETITEC EM T12 PV		ETITEC M T2 PV				ETITEC EM T2 PV	
	1100/12,5 Y	1500/12,5 Y	1100/6,25 Y	1500/5 Y	250/20 Y	600/20 Y	1100/20 Y	1500/20 Y	1100/20 Y	1500/15 Y
Class (IEC/EN/VDE)	T1, T2 / I, II / B, C				T2 / II / C					
Max Continuous Operating DC Voltage U _{cpv}	1100 V	1500 V	1100 V	1500 V	250 V	600 V	1100 V	1500 V	1100 V	1500 V
Nominal discharge current I _n (8/20)	20 kA		20 kA		20 kA				20 kA	15 kA
Total discharge current I _{total} (8/20)	50 kA	60 kA	65 kA	50 kA	50 kA	40 kA	30 kA	40 kA		
Impulse Discharge Current I _{imp} (10/350)	6,25 kA	6,25 kA	6,25 kA	5 kA	-	-	-	-	-	-
Total Discharge current I _{total} (10/350)	12,5 kA	6,25 kA	6,25 kA	5 kA	-	-	-	-	-	-
Specific energy W/R	9,77 kJ/Ω		9,77 kJ/Ω		6,25 kJ/Ω		-	-	-	-
Charge	3,125 As	2,5 As	3,125 As	2,5 As	-	-	-	-	-	-
Max discharge current I _{max} (8/20)	40 kA	60 kA	40 kA	30 kA	50 kA	40 kA	30 kA	40 kA		
Voltage Protection Level U _p at I _n (8/20)	< 3,8 kV	< 5 kV	< 3,8 kV	< 5 kV	< 1 kV	< 2 kV	< 3,8 kV	< 5 kV	< 4,2 kV	< 4,8 kV
Response time t _a	< 25 ns									
Thermal protection	✓									
Short-Circuit Current Rating SCCR I _{scpv}	11 kA	30 kA	11 kA		6 kA		11 kA		9 kA	
Operating temperature range Ta	- 40°C ... +85°C									
Permissible Operating Humidity RH	5% ... 95%									
Altitude (max)	4000 m						2000 m			
Operating State / Fault Indication	working - green flag / faulty - red flag									
Cross section of conductors	35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)									
Terminal Screw Torque Mmax	max. 4,5 Nm						max. 3 Nm			
Mounting	35 mm DIN Rail, EN 60715									
Degree of protection	IP20									
Housing Material	Thermoplastic: Extinguishing Degree UL 94 V-0									
Size	3 modules									
Standards	IEC 61643-31:18+A1:20144									
Installation in boards/cabinets	ECH, EPC, GT, SOLID GSX, HXS					ECH, EPC, GT, SOLID GSX, HXS, ECM, ECT, ACT				

Each arrester is equipped with thermal protection, which disconnects it from the electrical network in case of exceeding the permissible value



Quick module replacement with a latch lock to prevent accidental removal of the module and resistance to vibration




Additional protection against contact with current-carrying parts and conductors contacting each other



Protection against installation of incompatible modules



Spring-loaded retainer for quick mounting on a DIN rail

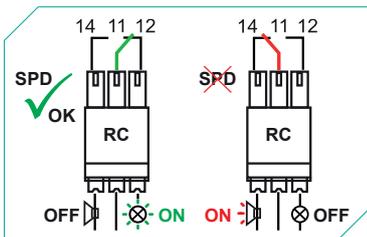

Remote signaling (RC) contacts of varistor damage (screwless)



All important technical data is printed on the front and side of the arrester



Visual indicator of varistor failure (red flag - damage; green flag - OK)



ETITEC (E)M T12 PV

ETITEC (E)M T12 PV Y series of overvoltage surge protective devices has been developed to protect against direct and indirect discharges and is intended to protect photovoltaic systems.

The circuit topology consist of three varistors stages each protected by a thermal disconnection device.

Advantages:

- // optical indication of faulty device (green ok, red false)
- // remote signalisation (RC version only)
- // DIN rail mounting (EN 60715)
- // high discharge currents and high degree of protection
- // MOV varistor is the protective element
- // metal snapper, new way of mounting on DIN rail (easier, quicker)
- // modular design
- // RoHS compliant
- // connection up to 35mm²

ETITEC M T12 PV

Suitable for green field installations (IEC/EN 61643-32)

Location of Use: String box, Inverter

Mode of Protection:(+) - PE, (-) - PE, (+) - (-)

Surge Ratings: I_{Total} = up to 12.5 kA (10/350 μ s)

I_{Total} = up to 60 kA (8/20 μ s)

EN Category: Type 1+2

Protective Elements: High Energy MOV

Housing: Pluggable Design

Compliance: IEC 61643-31:2018+A1:2014

ETITEC EM T12 PV

Suitable for roof installations (IEC/EN 61643-32)

Location of Use: String box, Inverter

Mode of Protection:(+) - PE, (-) - PE, (+) - (-)

Surge Ratings: I_{Total} =up to 6.25 kA (10/350 μ s)

I_{Total} =up to 65 kA (8/20 μ s)





EN Category: Type 1, Type 2

Protective Elements: High Energy MOV

Housing: Pluggable Design

Compliance: IEC 61643-31:2018+A1:2014


ETITEC (E)M T12 PV Y for photovoltaic system on a building with External Lightning Protection

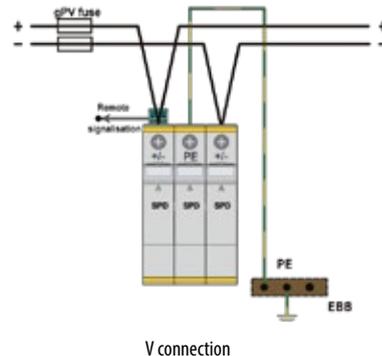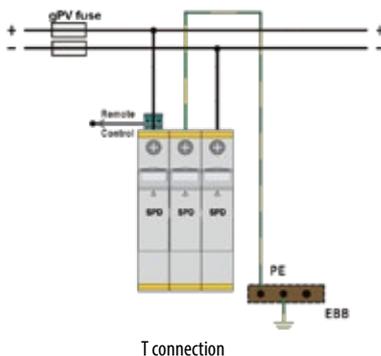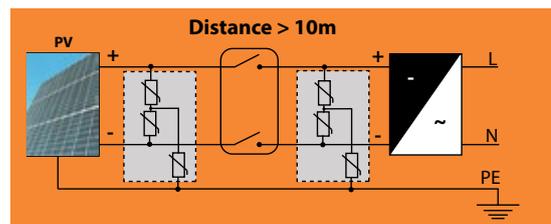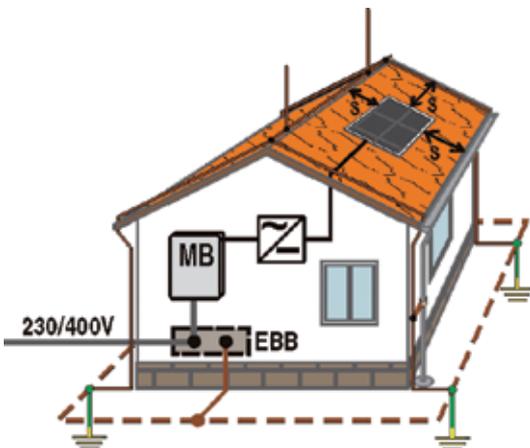


Note: If distance between string and inverter is less than 10 m, then you need only one ETITEC.

ETITEC M T12 PV technical data


Type	ETITEC M T12 PV 1100/12,5 Y	ETITEC M T12 PV 1500/12,5 Y
	T1,T2 / I,II / B,C	
Maximum Continuous Operating DC Voltage U_{CPV}	1100 V	1500V
Nominal Discharge Current (8/20 μ s) I_n	20 kA	20 kA
Total Discharge Current (8/20 μ s) I_{total}	50 kA	60 kA
Impulse Discharge Current (10/350)	6,25 kA	5 kA
Total Discharge Current (10/350 μ s) I_{total}	12,5 kA	10 kA
Specific Energy W/R	9,77 kJ/ Ω	9,77 kJ/ Ω
Charge	3,125 As	2,5 As
Voltage Protection Level U_p	< 3,8 kV	< 5 kV
Response Time t_A	< 25 ns	
Number of Ports	1	
Thermal Protection	✓	
Short-Circuit Current Rating SCCR I_{SCPV}	11 kA	
Operating Temperature Range T_a	- 40°C ... +85°C	
Permissible Operating Humidity R_h	5% - 95%	
Altitude (max)	4000 m	
Operating State / Fault Indication	Green Flag / Not Green Flag	
Conductor Cross Section (max)	35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)	
Terminal Screw Torque Mmax	max. 4,5 Nm	
Mounting	35 mm DIN Rail, EN 60715	
Degree Of Protection	IP20	
Housing Material	Thermoplastic: Extinguishing Degree UL 94 V-0	
Size	3 modules	
Remote contacts - type ...RC		
Contacts ratings	AC: 250V/1A; 125V/1A; DC: 48V/0,5A, 24V/0,5A, 12V/0,5A	
Terminal cross section	Max. 1,5 mm ²	
Terminal Screw Torque Mmax	0,25 Nm	
Standards	IEC 61643-31:2018+A1:2014	



ETITEC MT12 PV ... Y



ETITEC M T12 PV ... Y RC

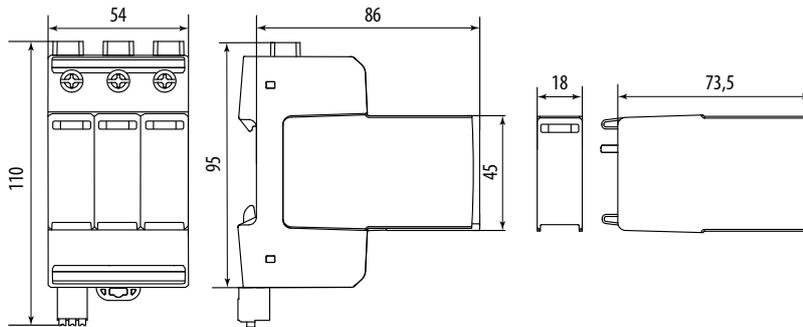

ETITEC M T12 PV 1500/12,5 Y

ETITEC M T12 PV

Type	Code No.	Max PV voltage U_{gr} [V DC]	I_{scpv} [kA]	I_{total} (10/350) [kA]	I_{imp} [kA]	I_n [kA]		
ETITEC M T12 PV 1100/12,5 Y	002440511	1100	11	12,5	6,25	20	453	1/5
ETITEC M T12 PV 1100/12,5 Y RC	002440512	1100	11	12,5	6,25	20	462	1/5
ETITEC M T12 PV 1500/12,5 Y	002440513	1500	30	12,5	6,25	20	488	1/5
ETITEC M T12 PV 1500/12,5 Y RC	002440514	1500	30	12,5	6,25	20	497	1/5

*RC - remote contact for remote signalisation of bad module (to be replaced)

Spare (replacement) modules


Type	Code No.	Compatible with		
MOD. MT12 PV 550/12,5	002440519	ETITEC MT12 PV 1100/12,5 Y (RC)	71	1/28
MOD. MT12 PV 550/6,25*	002440520	ETITEC MT12 PV 1100/12,5 Y (RC)	127	1/28
MOD. MT12 PV 750/10	002440521	ETITEC MT12 PV 1500/10 Y (RC)	87	1/28
MOD. MT12 PV 750/5*	002440522	ETITEC MT12 PV 1500/10 Y (RC)	130	1/28

*left or right module (Y connection)


Due to serial connection of modules (Y topology), U_{cpv} voltage of single module is 1/2 of total U_{cpv} between each pole

ETITEC EM T12 PV technical data


Type	ETITEC EM T12 PV 1100/6,25 Y (RC)	ETITEC EM T12 PV 1500/5 Y (RC)
	T1,T2 / I,II / B,C/1CA	
Maximum Continuous Operating DC Voltage U_{cpv}	1100 V	1500V
Nominal Discharge Current (8/20 μ s) I_n	20 kA	20 kA
Total Discharge Current (8/20 μ s) I_{total}	65 kA	50 kA
Impulse Discharge Current (10/350)	6,25 kA	5 kA
Total Discharge Current (10/350 μ s) I_{total}	6,25 kA	5 kA
Specific Energy W/R	9,77 kJ/ Ω	6,25 kJ/ Ω
Charge	3,125 As	2,5 As
Maximum Discharge Current (8/20 μ s) I_{max}	40 kA	30 kA
Voltage Protection Level U_p	3,8 kV	5 kV
Response Time t_A	< 25 ns	
Number of Ports	1	
Thermal Protection	✓	
Short-Circuit Current Rating $SCCR I_{scpv}$	11 kA	
Maximum Permitted DC Voltage V_{pvdcc}	1100 V	1500 V
Voltage Protection Rating V_{pr}	2500 V	4000 V
Nominal Discharge Current (8/20 μ s) I_n	20 kA	20 kA
Short-Circuit Current Rating $SCCR I_{scpv}$	50 kA	65 kA
Operating Temperature Range T_o	- 40°C ... +85°C	
Permissible Operating Humidity R_h	5% - 95%	
Altitude (max)	4000 m	
Operating State / Fault Indication	Green Flag / Not Green Flag	
Conductor Cross Section (max)	35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)	
Terminal Screw Torque M_{max}	max. 4,5 Nm	
Mounting	35 mm DIN Rail, EN 60715	
Degree Of Protection	IP20	
Housing Material	Thermoplastic: Extinguishing Degree UL 94 V-0	
Size	3 modules	
Remote contacts - type ...RC		
Contacts ratings	AC: 250V/1A; 125V/1A; DC: 48V/0,5A, 24V/0,5A, 12V/0,5A	
Terminal cross section	Max. 1,5 mm ²	
Terminal Screw Torque M_{max}	0,25 Nm	
Standards	IEC 61643-31:2018+A1:2014	



ETITEC EM T12 PV ... Y



ETITEC EM T12 PV ... Y RC

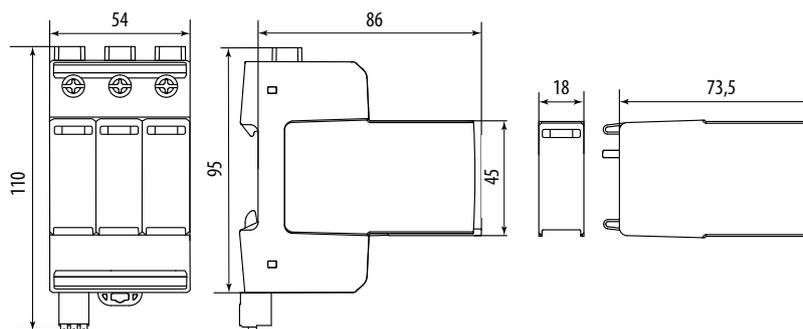

ETITEC EM T12 PV

Type	Code No.	Max PV voltage U_{opv} [V DC]	I_{sgv} [kA]	I_{total} (10/350) [kA]	I_{imp} [kA]	I_n [kA]	 g	
ETITEC EM T12 PV 1100/6,25 Y	002440580	1100	11	6,25	6,25	20	397	1/5
ETITEC EM T12 PV 1100/6,25 Y RC	002440581	1100	11	6,25	6,25	20	406	1/5
ETITEC EM T12 PV 1500/5 Y	002440582	1500	11	5	5	20	488	1/5
ETITEC EM T12 PV 1500/5 Y RC	002440583	1500	11	5	5	20	497	1/5

*RC - remote contact for remote signalisation of bad module (to be replaced)

Spare (replacement) modules

Type	Code No.	Compatible with	 g	
MOD. EM T12 PV 550/6,25	002440584	ETITEC EM T12 PV 1100/6,25 Y (RC)	79	1/28
MOD. EM T12 PV 750/5	002440585	ETITEC EM T12 PV 1500/5 Y (RC)	87	1/28

Due to serial connection of modules (Y topology), U_{opv} voltage of single module is 1/2 of total U_{opv} between each pole



ETITEC EM T12 PV 1100/6,25 Y RC

ETITEC (E)M T2 PV

ETITEC (E)M T2 PV Y series of overvoltage surge protective devices has been developed to protect against indirect discharges and is intended to protect photovoltaic systems.

The circuit topology consist of two (three) varistors stages each protected by a thermal disconnection device.

Advantages:

- // optical indication of faulty device (green ok, red false)
- // remote signalisation (RC version only)
- // DIN rail mounting (EN 60715)
- // high discharge currents and high degree of protection
- // MOV varistor is the protective element
- // metal snapper, new way of mounting on DIN rail (easier)
- // modular design
- // IEC 61643-31:2018
- // RoHS compliant
- // connection up to 35mm²

ETITEC (E)M T2 PV

Suitable for installations (IEC/EN 61643-31:2018)

Location of Use: String box, Inverter

Mode of Protection:(+) - PE, (-) - PE, (+) - (-)

Surge Ratings: I_{Total} = up to 20 kA (8/20 μ s)

I_{Total} = up to 50 kA (8/20 μ s)




EN Category: Type 2

Protective Elements: High Energy MOV


Housing: Pluggable Design

Compliance: IEC 61643-31:2018+A1:2014

ETITEC (E)M T2 PV Y for photovoltaic system on a building without External Lightning Protection

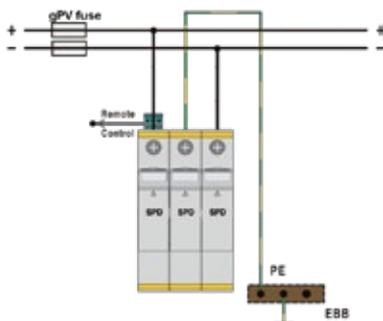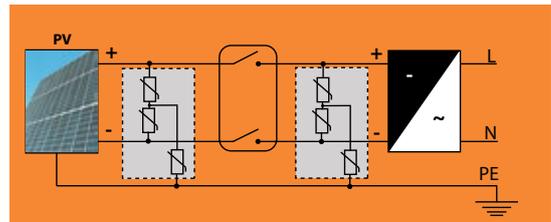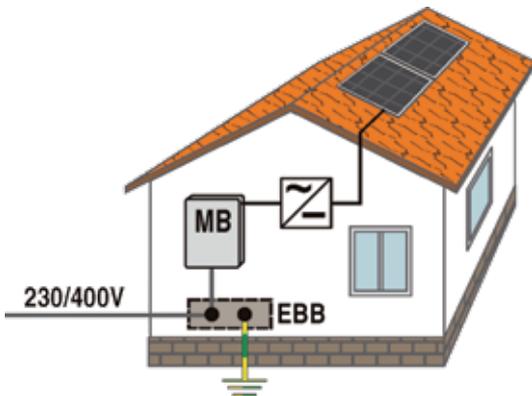

T connection

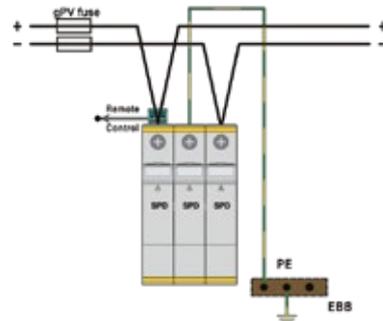

V connection

Note: If distance between string and inverter is less than 10 m, then you need only one ETITEC.

Difference between ETITEC M T2 PV and ETITEC EM T2 PV


ETITEC EM T2 PV is the economic version without module latching mechanism, easily distinguishable from ETITEC M T2 PV by the grey color of ETI logo on the device.

ETITEC M T2 PV technical data


Type	ETITEC M T2 PV 250/20 Y	ETITEC M T2 PV 600/20 Y	ETITEC M T2 PV 1100/20 Y	ETITEC M T2 PV 1500/20 Y
	T2 / II / C			
Maximum Continuous Operating DC Voltage U_{CPV}	250 V	600 V	1100 V	1500V
Nominal Discharge Current (8/20 μ s) I_n	20 kA			
Maximum Discharge Current (8/20 μ s) I_{max}	50 kA		40 kA	30 kA
Total Discharge Current I_{total}	50 kA		40 kA	
Voltage Protection Level U_p	1 kV	2 kV	< 3,8 kV	< 5 kV
Response Time t_A	< 25 ns			
Number of Ports	1			
Thermal Protection	✓			
Short-Circuit Current Rating I_{SCPV}	11 kA			
Operating Temperature Range T_a	- 40°C ... +85°C			
Permissible Operating Humidity R_H	5% - 95%			
Altitude (max)	4000 m			
Operating State / Fault Indication	Green Flag / Not Green Flag			
Conductor Cross Section (max)	35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)			
Terminal Screw Torque Mmax	max. 4,5 Nm			
Mounting	35 mm DIN Rail, EN 60715			
Degree Of Protection	IP20			
Housing Material	Thermoplastic: Extinguishing Degree UL 94 V-0			
Size	3 modules			
Remote contacts - type ...RC				
Contacts ratings	AC: 250V/1A; 125V/1A; DC: 48V/0,5A, 24V/0,5A, 12V/0,5A			
Terminal cross section	Max. 1,5 mm ²			
Terminal Screw Torque Mmax	0,25 Nm			
Standards	IEC 61643-31:2018+A1:2014			

Legend

- +/-, -/+ Terminal for +/-, -/+ Conductor
- ⊥ Terminal for PE /G Conductor
- RC Remote Contacts Optional
- TD Thermal Disconnecter




ETITEC M T2 PV ... Y




ETITEC M T2 PV ... Y RC

Plug Internal Configuration



Spare Plug



ETITEC M T2 PV

Type	Code No.	Max PV voltage U_{opv} [V DC]	I_{sgv} [kA]	I_n/I_{max} [kA]	 g	
ETITEC M T2 PV 250/20 Y	002440732	250	11	20/50	294	1/5
ETITEC M T2 PV 250/20 Y RC	002440733	250	11	20/50	300	1/5
ETITEC M T2 PV 600/20 Y	002440735	600	11	20/50	347	1/5
ETITEC M T2 PV 600/20 Y RC	002440736	600	11	20/50	353	1/5
ETITEC M T2 PV 1100/20 Y	002440515	1100	11	20/40	396	1/5
ETITEC M T2 PV 1100/20 Y RC	002440516	1100	11	20/40	406	1/5
ETITEC M T2 PV 1500/20 Y	002440517	1500	11	20/30	444	1/5
ETITEC M T2 PV 1500/20 Y RC	002440518	1500	11	20/30	454	1/5

*RC - remote contact for remote signalisation of bad module (to be replaced)


Spare (replacement) modules

Type	Code No.	Compatible with	 g	
MOD. M T2 PV 125/20	002440734	ETITEC M T2 PV 250/20 Y (RC)	50	1/24
MOD. M T2 PV 300/20	002440737	ETITEC M T2 PV 600/20 Y (RC)	61	1/24
MOD. M T2 PV 550/20	002440523	ETITEC M T2 PV 1100/20 Y (RC)	0,071	1/28
MOD. M T2 PV 750/20	002440524	ETITEC M T2 PV 1500/20 Y (RC)	0,087	1/28

*Due to serial connection of modules (Y topology), U_{opv} voltage of single module is 1/2 of total U_{opv} between each pole




ETITEC M T2 PV 1100/20 Y

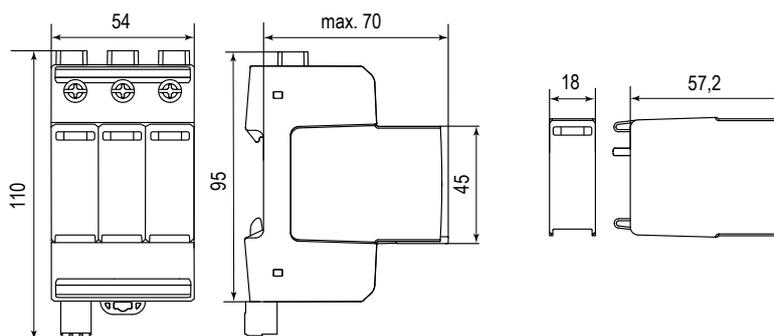


ETITEC EM T2 PV technical data


Type		ETITEC EM T2 PV 1100/20 Y	ETITEC EM T2 PV 1500/15 Y
		T2 / II / C	
Maximum Continuous Operating DC Voltage U_{CPV}		1100 V	1500V
Nominal Discharge Current (8/20 μ s) I_n		20 kA	15 kA
Maximum Discharge Current (8/20 μ s) I_{max}		40 kA	40 kA
Total Discharge Current I_{total}		40 kA	40 kA
Voltage Protection Level U_p	(+)(-)	< 4,2 kV	< 4,8 kV
	(+)(-)-PE	< 4,2 kV	< 4,8 kV
Response Time t_A		< 25 ns	
Thermal Protection		✓	
Number of Ports		1	
Short-Circuit Current Rating I_{SCPV}		9 kA	
Maximum Permitted DC Voltage V_{pVDC}		1000V	1500V
Voltage Protection Rating V_{PR}		2500V	3000V
Short-Circuit Current Rating $SCCR I_{SCPV}$		50kA	65kA
Operating Temperature Range T_a		- 40°C ... +85°C	
Permissible Operating Humidity R_h		5% - 95%	
Altitude (max)		2000 m	
Operating State / Fault Indication		Green Flag / Not Green Flag	
Conductor Cross Section (max)		35 mm ² (Solid) / 25 mm ² (Stranded)	
Terminal Screw Torque M_{max}		max. 4,5 Nm	
Mounting		35 mm DIN Rail, EN 60715	
Degree Of Protection		IP20	
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0	
Size		3 modules	
Remote contacts - type ...RC			
Contacts ratings		AC: 250V/1A; 120V/1A; DC: 48V/0,5A, 24V/0,5A, 12V/0,5A	
Terminal cross section		Max. 1,5 mm ²	
Terminal Screw Torque M_{max}		0,25 Nm	
Standards		IEC 61643-31:2018+A1:2014	



ETITEC EM T2 PV ... Y



ETITEC EM T2 PV ... Y RC

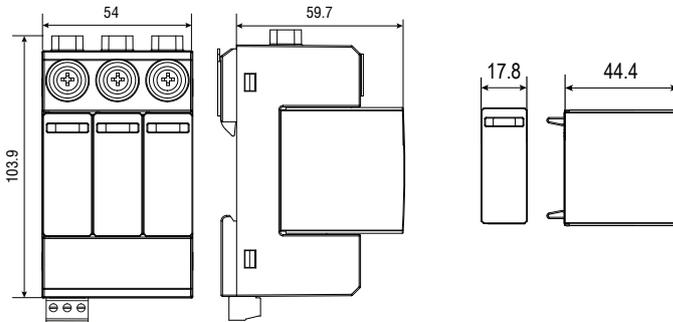

ETITEC EM T2 PV

Type	Code No.	Max PV voltage U_{CPV} [V DC]	I_{SCPV} [kA]	I_n / I_{max} [kA]		
ETITEC EM T2 PV 1100/20 Y	002440623	1100	9	20/40	329	1/5
ETITEC EM T2 PV 1100/20 Y RC	002440624	1100	9	20/40	333	1/5
ETITEC EM T2 PV 1500/20 Y	002440625	1500	9	20/40	358	1/5
ETITEC EM T2 PV 1500/20 Y RC	002440626	1500	9	20/40	363	1/5

*RC - remote contact for remote signalisation of bad module (to be replaced)

Spare (replacement) modules

Type	Code No.	Compatible with		
MOD. EM T2 PV 550/20	002440627	ETITEC EM T2 PV 1100/20 Y (RC)	60	1/12
MOD. EM T2 PV 750/20	002440628	ETITEC EM T2 PV 1500/20 Y (RC)	71	1/12



ETITEC EM T2 PV 1500/15 Y

Overvoltage protection of PV inverters

ETITEC M T12 950/12,5 4Y


ETITEC M T12 950/12,5 4Y series of overvoltage surge protective devices has been developed to protect against direct and indirect discharges the new generation of PV inverters with an output voltage of 800V AC (line voltage).
Class I · Class II · Type 1 · Type 2

Features:


- // Type 1 and Type 2 SPD
- // Uc up to 950V
- // Discharge capacity – Iimp 12,5 kA
- // Discharge capacity - I_{max} up to 50 kA
- // Housing: Pluggable Design
- // Compliance: IEC 61643-11:2011, EN 61643-11:2012+A11:2018

Technical data

Type	ETITEC M T12 950/12,5 4Y T1,T2 / I,II / B,C
Nominal AC voltage (50/60Hz)	800 V
Maximum Continuous Operating Voltage (AC)	950 V
Nominal Discharge Current (8/20 μs)	20 kA
Maximum Discharge Current (8/20 μs)	50 kA
Impulse Discharge Current (10/350)	12,5 kA
Specific Energy W/R	39 kJ/Ω
Charge	6,25 As
Voltage Protection Level	4000 V
Residual voltage at 5kA (8/20 μs)	3100 V
Response Time	< 25 ns
Number of Ports	1
Overcurrent protection (max)	160 A gG
Short-Circuit Current Rating	25 kA
Operating Temperature Range	- 40°C ... +85°C
Permissible Operating Humidity	5% - 95%
Altitude (max)	2000 m
Terminal screw torque	4,5Nm
Conductor Cross Section (max)	35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting	35 mm DIN Rail, EN 60715
Degree Of Protection	IP20
Housing Material	Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal protection	✓
Operating state / fault indication	Green Flag / Not Green Flag
Remote contacts - type ...RC	
RC switching capacity	AC: 250V/1A; 125V/1A; DC: 48V/0,5A, 24V/0,5A, 12V/0,5A
Terminal cross section	Max. 1,5 mm ²




ETITEC M T12 950/12,5 4Y



ETITEC M T12 950/12,5 4Y RC

Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⊥ PE /G Conductor Terminal
- RC Remote Contacts (Optional)Terminal
- TD Thermal Disconnecter

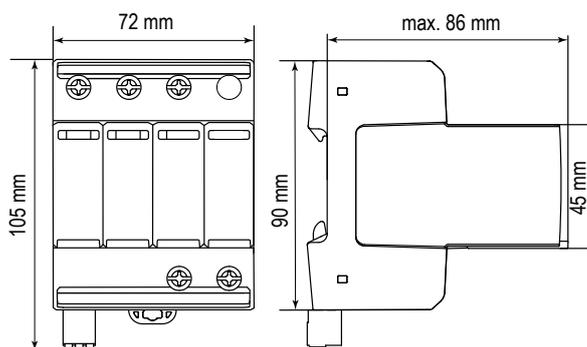

ETITEC M T12 950/12,5 4Y

Type	Code No.	I_{imp} (10/350) [kA]	I_{IT}^{max} (8/20) [kA]	U_c [V AC]	Network	g	Box
ETITEC M T12 950/12,5 4Y	002440810	12,5	20 / 50	950	TNC / IT	775	1 / 4
ETITEC M T12 950/12,5 4Y RC	002440811	12,5	20 / 50	950	TNC / IT	78	1 / 4

Spare (replacement) modules

Type	Code No.	Compatible with	g	Box
MOD.ETITEC M T12 400/12,5	002440812	ETITEC M T12 950/12,5 4Y (RC)	13	1 / 28
MOD.ETITEC M T12 550/12,5 PE/N*	002440813	ETITEC M T12 950/12,5 4Y (RC)	128	1 / 28

*4th pole without indication window, needs to be replaced each time as any of other modules is being replaced



ETITEC M T12 950/12,5 4Y

ETITEC M T2 950/20 4Y

ETITEC M T2 950/20 4Y series of overvoltage surge protective devices has been developed to protect against indirect discharges the new generation of PV inverters with an output voltage of 800V AC (line voltage).


Class II · Type 2

Features:


- // Type 2 SPD
- // Uc up to 950V
- // Discharge capacity - I_{max} up to 40 kA
- // Housing: Pluggable Design
- // Compliance: IEC 61643-11:2011, EN 61643-11:2012+A11:2018

Technical data

Type	ETITEC M T2 950/20 4Y T2 / II / C
Nominal AC voltage (50/60Hz)	800 V
Maximum Continuous Operating Voltage (AC)	950 V
Nominal Discharge Current (8/20 μs)	20 kA
Maximum Discharge Current (8/20 μs)	40 kA
Total Discharge Current (10/350)	5 kA
Voltage Protection Level	4500 V
Residual voltage at 5kA (8/20 μs)	3400 V
Response Time	< 25 ns
Number of Ports	1
Overcurrent protection (max)	160 A gG
Short-Circuit Current Rating	25 kA
Operating Temperature Range	-40°C ... +85°C
Permissible Operating Humidity	5% - 95%
Altitude (max)	2000 m
Terminal screw torque	4,5Nm
Conductor Cross Section (max)	35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting	35 mm DIN Rail, EN 60715
Degree Of Protection	IP20
Housing Material	Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal protection	✓
Operating state / fault indication	Green Flag / Not Green Flag
Remote contacts - type ...RC	
RC switching capacity	AC: 250V/1A; 125V/1A; DC: 48V/0,5A, 24V/0,5A, 12V/0,5A
Terminal cross section	Max. 1,5 mm ²




ETITEC M T2 950/20 4Y



ETITEC M T2 950/20 4Y RC

Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⊥ PE /G Conductor Terminal
- RC Remote Contacts (Optional) Terminal
- TD Thermal Disconnect

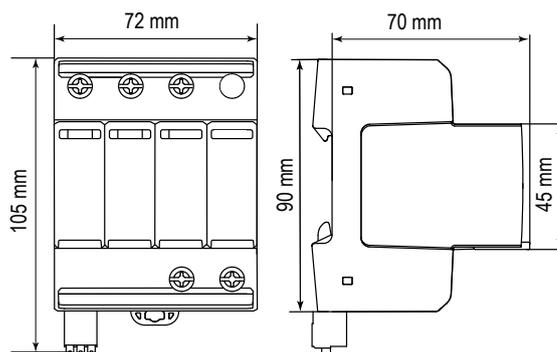

ETITEC M T2 950/20 4Y

Type	Code No.	I_n/I_{max} (8/20) [kA]	U_c [V AC]	Network	g	Box
ETITEC M T2 950/20 4Y	002440820	20 / 40	950	TNC / IT	759	1 / 4
ETITEC M T2 950/20 4Y RC	002440821	20 / 40	950	TNC / IT	764	1 / 4

Spare (replacement) modules

Type	Code No.	Compatible with	g	Box
MOD.ETITEC M T2 400/20 PE/N *	002440822	ETITEC M T2 950/20 4Y (RC)	93	1 / 28
MOD.ETITEC M T2 550/20	002440823	ETITEC M T2 950/20 4Y (RC)	75	1 / 28

*4th pole without indication window, needs to be replaced each time as any of other modules is being replaced



ETITEC M T2 950/20 4Y

ETITEC V T2 690V (EN/IEC/VDE: T2/II/C)

ETITEC V series of overvoltage surge protective devices has been developed to protect the new generation PV network inverters with an output voltage of 800V (line voltage). The circuit topology consist of three (four) parallel-connected varistor modules. Each pole is equipped with a visual indication.

Advantages:

- // Type 2 AC Surge Protector
- // I_n : 20 kA
- // I_{max} : 40 kA
- // Pluggable module for each phase
- // Remote signaling option
- // IEC 61643-11 and EN 61643-11 compliance
- // UL1449 ed.4

Designation:

ETITEC V T2 xxx/20 p+c RC

xxx - voltage U_c (max. operating voltage AC), must be above the mains voltage

20 - 20kA (8/20us)



p - number of poles with varistors MOV


c - 0 varistors MOV at the NPE pole, 1 gas-discharge GDT (TT systems)

RC - Remote signaling contact

Technical data

Type	ETITEC V T2 690/20
Class (IEC/EN/VDE)	II/T2/C
Network (TN)	690 V/1f
Max. AC operating voltage (AC) U_c	760 V
Temporary Over Voltage Characteristics (TOV) U_T (AC)	1000V/5s withstand 1300V/120 min safe turn off
Residual current I_{pe}	< 1 mA
Follow current I_f	none
Nominal discharge current I_n (15 imp. x 8/20)	20 kA
Max. discharge current I_{max} (8/20)	40 kA
Protection level U_p	3,5 kV
Admissible short-circuit current I_{SCCR}	25 000A
Thermal disconnecter	internal
Fuses	125 A gG
Installation ground fault breaker	Type «S» or delayed
Connection to Network	By screw terminals: 2,5-25 mm ² / by bus
Disconnection indicator	1 mechanical indicator
Remote signaling of disconnection (RC)	✓
Mounting	Symmetrical rail 35 mm (EN60715)
Operating temperature	- 40°C ...+85°C
Protection rating	IP 20
Housing material	Thermoplastic UL94-V0
Standards	IEC 61643-11 / EN 61643-11

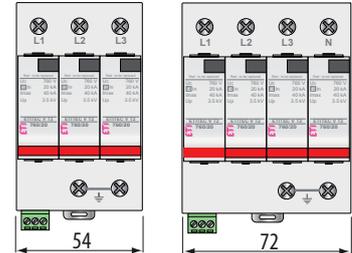

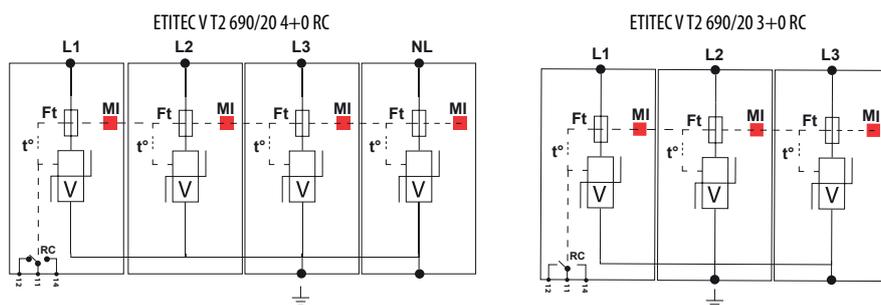

ETITEC V T2

Type	Code No.	$I_n / I_{n\max}$ [kA]	U_c [V AC]	Network	 g	 1/24
ETITEC V T2 690/20 3+0 RC	002442988	20/40	750	TNC	319	1/24
ETITEC V T2 690/20 4+0 RC	002442989	20/40	750	TNC-S	420	1/18



ETITEC V T2 690/20 3+0 RC

SWITCH DISCONNECTORS



 etigroup
www.etigroup.eu

**PV Switch
Disconnectors**

ETI
SWITCH TO
A SAFE FUTURE

PV switch disconnector LS DC

The construction of the switch ensures reliable switching up to 1500V. The design of the contacts and the choice of materials prevent oxidation and inadmissible heating-up, even with a low switching frequency. The switch disconnector is available with 2, 4, or 4+2 contacts. By wiring the contacts in series or parallel, the contact rating can be increased. Additionally, the switching speed of the manually operated handle does not affect the performance of the contacts.

General characteristics

Rated voltage	≤ 1500V d.c.
Rated current	≤ 58A
Standards	IEC 60364-7-712
Application	For interrupting the DC/AC inverter from the solar panels




PV switch disconnector for photovoltaic systems

Code	Type			
004660060	LS16 SMA A2			
004660061	LS25 SMA A2	2-pole		
004660062	LS32 SMA A2			
004660063	LS16 SMA A4		150	1
004660064	LS25 SMA A4	4-pole		
004660065	LS32 SMA A4			
004660066	LS32 SMA A4+2	4+2 pole	430	
004660067*	LSV-B1	-	6,6	100


Switch disconnectors "LS.." are switch gears for interrupting DC/AC-inverter from the solar-panels. Photovoltaic-installations have to be equipped with DC-isolators according to IEC 60364-7-712.

*Insulated Jumper


LS32 SMA A4+2 has already installed jumpers for series and parallel connection.

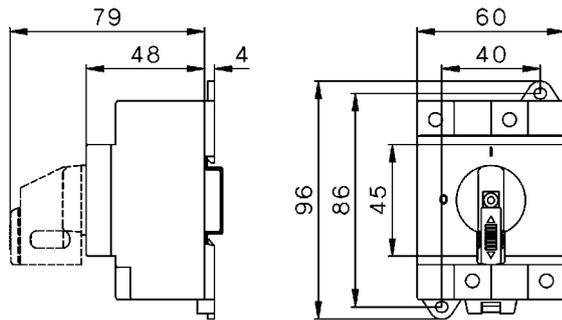


LS16, 25, 32 2p

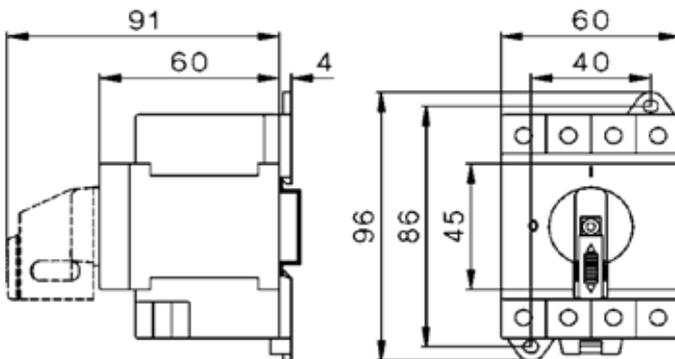

LS16, 25, 32 4p

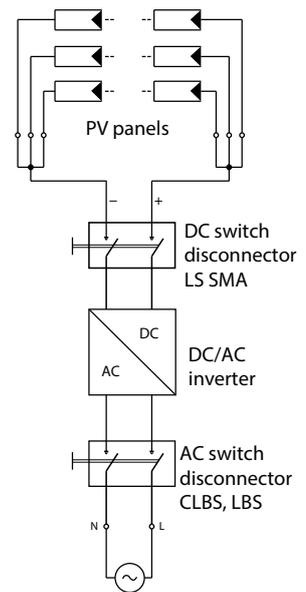

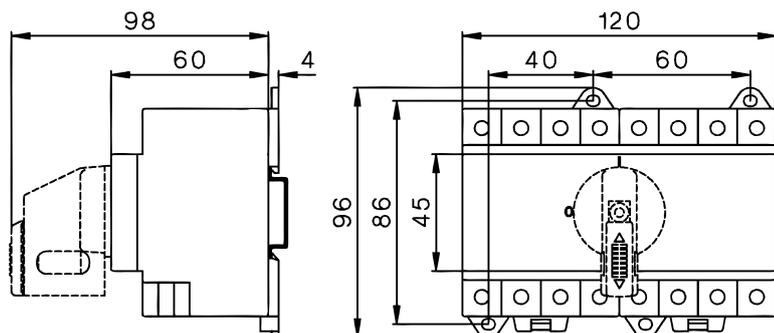



LS32 A4+2

Technical data

Type			LS16 [A]		LS25 [A]		LS32 [A]	
			DC21B	DC22B	DC21B	DC22B	DC21B	DC22B
Rated conditional short-circuit current		kA _{eff}	5					
Max. fuse size gL (gG)		A	40		63		80	
Mechanical life		x10 ³	10					
Rated short-time withstand current (1s) I _{cw}	A2, A4, A6, A8	A	800		900		1000	
	A2+2, A3+2, A4+2	A	1300		1500		1700	
Short circuit making capacity I _{cm}	A2, A4, A6, A8	A	800		900		1000	
	A2+2, A3+2, A4+2	A	1300		1500		1700	
Maximum cable cross sections including jumper LSV-B1	solid or stranded	mm ²	4 - 16					
	flexible	mm ²	4 - 10					
	flexible (+ multicore cable end)	mm ²	4 - 10					
	Size of terminal screw		M4 Pz2					
Maximum cable cross sections 2 cables per clamp without jumper LSV-B1 / LSV-B2	Tightening torque	Nm	1,7 - 1,8					
	solid or stranded	mm ²	16+(1,5-2,5) / 10+(1,5-6) / 6+(1,5-10) / 4+(1,5-10)					
	flexible & flexible + multicore cable end	mm ²	16+(1,5-2,5) / 10+(1,5-4) / 6+(1,5-6)					
	stranded	AWG	8+(16-12) / 10+(16-10) / 12+(16-8) 14+(16-8)					
Maximum ambient temperature	solid	AWG	10+(16-12) / 12+(16-10) 14+(16-10)					
	Operation	°C	-40 ... +65					
Power loss per switch at I _e max	Storage	°C	-50 ... +90					
	A2	(A)/W	(16) / 1		(25) / 2,3		(32) / 3,7	
Contact resistance per pole	A4	(A)/W	(16) / 2		(25) / 4,6		(32) / 7,4	
	A6	(A)/W	(16) / 3		(25) / 6,9		(32) / 11,1	
	A8	(A)/W	(16) / 4		(25) / 9,2		(32) / 14,8	
	A2+2	(A)/W	(29) / 1,5		(45) / 3,7		(58) / 6	
	A3+2	(A)/W	(29) / 2,3		(45) / 5,6		(58) / 9	
	A4+2	(A)/W	(29) / 3		(45) / 7,4		(58) / 12	
			mΩ	1,75				

Because of very high breaking point capacity, switch disconnectors "LS..." are suitable for many different operating conditions.

GREEN PROTECT / PV Switch Disconnectors

Main contacts		Typ	LS16	LS25	LS32		
Rated thermal current I_{th}		A	16	25	32		
Rated insulation voltage U_i ¹⁾		V	1000	1000	1000		
Rated insulation voltage U_i ²⁾		V	1500	1500	1500		
Distance of contacts (per pole)		mm	8	8	8		
Rated operational current I_e							
DC21A and DC21B	1 pole	300V	A	16	23	27	
		400V	A	12/14	14/22	16/25	
	A1	500V	A	9/10	11/17	13/20	
		600V	A	6/7	8/12	10/15	
	1 	700V	A	4,5/5	6	7,5	
		800V	A	3	4	5	
	only DC21B	2 poles in series	900V	A	2,5/3	3	4
			1000V	A	1,5/2	2	2,5/3
	A2	2 poles in series	500V	A	16	25	32
			600V	A	16	25	32
A2		700V	A	16	23/25	27/32	
		800V	A	16/16	20	- /23	
1 2 		900V	A	13/16	16/17	- /20	
		1000V	A	9/10	11/11,5	13	
1200V		A	6/7	8/8,5	10		
		1500V	A	3	4/5	5/6	
A2+2		2 poles in series + 2 poles parallel	500V	A	29	45	58
			600V	A	29	45	50/55
	A2+2	700V	A	16/22	23/27	27/32	
		800V	A	16/17	20	- /23	
	1 2 	900V	A	13/16	16/17	- /20	
		1000V	A	9/10	11/11,5	13	
	1200V	A	6/7	8/8,5	10		
		1500V	A	3	4/5	5/6	
	A3+2	3 poles in series + 2 poles parallel	500V	A	29	45	58
			600V	A	29	45	50/58
A3+2		700V	A	29	38/43	45/55	
		800V	A	29	38/40	- /51	
1 2 3 		900V	A	29	- /38	- /47	
		1000V	A	29	- /38	- /45	
1200V		A	12	14/25	16/28		
		1500V	A	9	11/14	13/20	
A4		4 poles in series	500V	A	16	25	32
			600V	A	16	25	32
	A4	700V	A	16	25	32	
		800V	A	16	25	32	
	1 2 3 4 	900V	A	16	25	32	
		1000V	A	16	25	32	
	1200V	A	16	25	32		
		1500V	A	16	20/25	23/32	
	A4+2	4 poles in series + 2 poles parallel	500V	A	29	45	58
			600V	A	29	45	58
A4+2		700V	A	29	45	- /58	
		800V	A	29	45	- /58	
1 2 3 4 		900V	A	29	45	- /58	
		1000V	A	29	- /45	- /58	
1200V		A	29	- /45	50		
		1500V	A	16	20/26	23/32	
Rated operational current I_e							
AC21B							
A2, A4	U_e max. 440V	A	16	25	32		
A2+2	U_e max. 440V	A	29	45	58		

1) Suitable at overvoltage category I to III, pollution degree 3 (standard-industry): $U_{imp} = 8kV$.
 2) Suitable at overvoltage category I to III, pollution degree 2 (min. IP55): $U_{imp} = 8kV$.

PV switch disconnecter LBS DC

LBS DC are manually operated multipolar load break switches with making and breaking capacity under load conditions up to 1500 VDC. These extremely durable switches have been tested and approved for use in the most demanding applications. They are designed and tested for all types of applications: earthing, floating, and bipolar.

- // Thanks to a reduced number of bridging bars, you can limit your costs and save mounting time
 - // A 2 pole switch has reduced warming and can be placed in a smaller enclosure
 - // tested to critical currents and at 10kA short circuit during 50 ms without specific protection
- High quality materials glass fibre reinforced polyester frame provide:
- // high mechanical strength,
 - // stability to temperature variations (RTI of 130°C)
 - // high dielectric strength (high CTI / tested as per standard ASTM D 2303)

// Mounting system provides better cooling



// Handle position indicates true position of switch.



// Perforated protection covers enable measuring the contacts' temperature without removing covers.



// → Indicator provides contacts position.



// Possible to lock handle with 3 locks.



// Package includes connection screws.



// Indicator provides contacts position.



General characteristics

Rated voltage	1000 & 1500 VDC (500 VDC/pole) IEC 60947-3
Rated current	≤ 400A
Standards	IEC 60947-3, IEC 60364-7-712
Application	For interrupting DC circuits (PV, battery storage systems, etc.)

1 PV circuit 1000 V DC


Type	Code No.	Nr. Of poles	Description	Current [A] / pole		
LBS 100 2P DC1000	004661853	2		100	1850	1
LBS 160 2P DC1000	004661854	2	500 V DC / pole	160	1870	1
LBS 250 2P DC1000	004661855	2		250	1850	1

Connect poles in series for 1000 VDC, or in parallel for higher nominal current (2x at 2 pole and 4x at 4 pole)



Technical data (according to IEC 60947-3):


Type	LBS 100 DC				LBS 160 DC				LBS 250 DC					
Rated current I_n	100 A				160 A				250 A					
Thermal current at 40 °C	100 A				160 A				250 A					
Thermal current at 50 °C	100 A				160 A				250 A					
Thermal current at 60 °C	100 A				160 A				250 A					
Rated insulation voltage U_n	1000 V DC				1000 V DC				1000 V DC					
Rated impulse withstand voltage U_{imp}	12kV				12kV				12kV					
Number of circuits	Rated insulation voltage	Util. category	I_e [A]	Number of poles in series per circuit	Number of poles of the device	Frame size	I_e [A]	Number of poles in series per circuit	Number of poles of the device	Frame size	I_e [A]	Number of poles in series per circuit	Number of poles of the device	Frame size
1	1000V DC	DC-21B	100	1P+ ; 1P-	2	B4	160	1P+ ; 1P-	2	B4	250	1P+ ; 1P-	2	B4
Rated short-term withstand current 0,3s (rms)		10 kA				10 kA				10 kA				
Rated short-term withstand current 1s (rms)		5 kA				5 kA				5 kA				
Rated short-circuit making capacity I_{cm} (50ms)		10 kA				10 kA				10 kA				
Connection														
Nominal Cu cable section		35 mm ²				70 mm ²				120 mm ²				
Nominal Cu busbar width		32 mm				32 mm				32 mm				
Max Cu rigid cable cross-section		35 mm ²				70 mm ²				120 mm ²				
Max Cu busbar width		32 mm				32 mm				32 mm				
Tightening torque min		20 Nm				20 Nm				20 Nm				
Tightening torque max		26 Nm				26 Nm				26 Nm				
Durability (number of operating cycles)						10.000								
Operating effort						10 Nm								
Weight of a 2 pole device						1,8 kg								
Power dissipation per poles of the PV switch (W/P) @ 40°C		0,8				2				4,7				

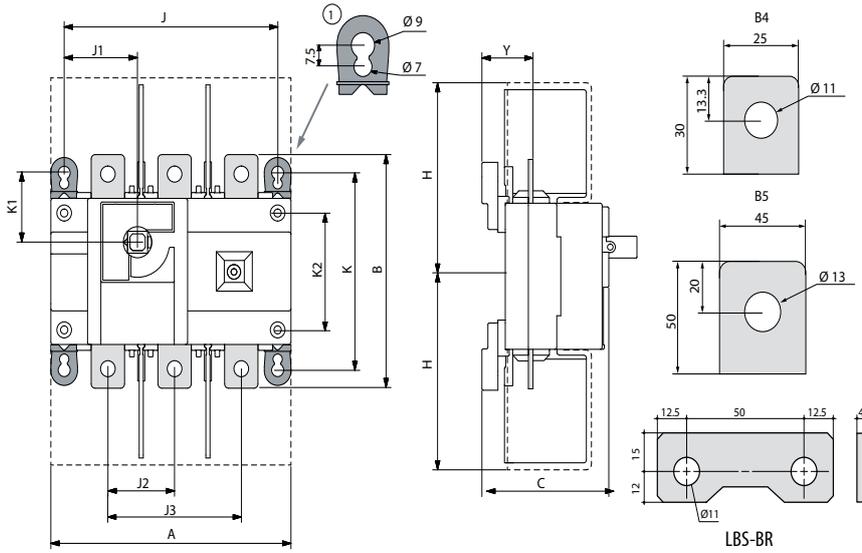

Pole connections in series LBS DC

1000 V DC (1 PV circuit)

Frame size B4, 2P



Frame size	Nr. Of poles	Dimensions (mm)											
		A	B	C	H	J	J1	J2	J3	K	K1	K2	Y
B4	2	180	160	95	132,5	160	55	-	100	135	48	80	38,5

1 PV circuit 1500 V DC

Type	Code No.	Nr. Of poles	Description	Current [A] / pole	g	Box
LBS 250 3P DC1500 B4T	004661992	3	500 V DC / pole	250	2390	1
LBS 400 3P DC1500 B4T	004661993	3		400	2390	1


Connect poles in series for 1000 VDC, or in parallel for higher nominal current (2x at 2 pole and 4x at 4 pole)



Pole connections in series LBS DC


1500 V DC (1 PV circuit)

Frame size B4T, 3P



Technical data (according to IEC 60947-3):

Type	LBS 250 3P DC1500				LBS 400 3P DC1500					
Rated current I_n	250 A				400 A					
Thermal current at $\leq 60^\circ\text{C}$	250 A				400 A					
Thermal current at 65°C	237 A				380 A					
Thermal current at 70°C	225 A				360 A					
Rated insulation voltage U_n	1500 V DC				1500 V DC					
Rated impulse withstand voltage U_{imp}	12kV				12kV					
Number of circuits	Rated insulation voltage	Util. category	I_c [A]	Number of poles in series per circuit	Number of poles of the device	Frame size	I_c [A]	Number of poles in series per circuit	Number of poles of the device	Frame size
1	1500V DC	DC-PV1	250	2P+ ; 1P-	3	B4T	400	2P+ ; 1P-	3	B4T
Rated short-term withstand current 0,3s (rms)			10 kA				10 kA			
Rated short-term withstand current 1s (rms)			5 kA				5 kA			
Connection										
Nominal Cu cable section			120 mm ²				240 mm ²			
Nominal Cu busbar width			32 mm				32 mm			
Max Cu rigid cable cross-section			120 mm ²				240 mm ²			
Max Cu busbar width			32 mm				32 mm			
Tightening torque min			20 Nm				20 Nm			
Tightening torque max			26 Nm				26 Nm			
Durability (number of operating cycles)						10.000				
Operating effort						10 Nm				
Power dissipation per poles of the PV switch (W/P) @ 40°C			5				30			

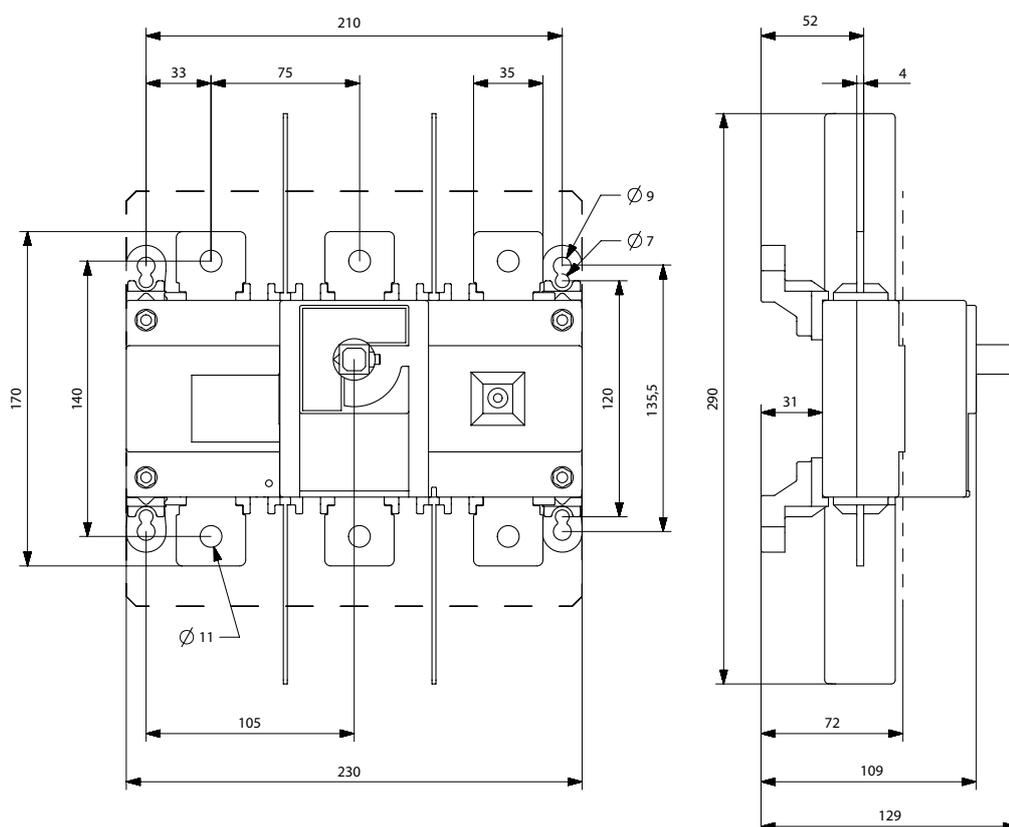

LBS AC1000 load break switches (IEC 69047-3)

For heavy duty applications up to 1000 VAC - AC 22

Advantages

Improved performance

The rapid opening and closing, combined with the arcing chambers, ensure improved breaking performance.

Harsh service categories AC-22 under 1000 VAC.

Robustness

Double breaking per pole (proven sliding system) offering durability and high short-circuit current withstand.

Made of glass fiber reinforced polyester for maximum thermal and mechanical resistance.

Safe operation

The position indicator is directly on the bar housing the moveable contacts, ensuring it can be seen in all circumstances.

Ease of installation

Connection facilitated by the design of the external terminals:

good centre-to-centre distance (up to 65 mm),

copper connection up to 240 mm²,

large range of accessories to facilitate integration and operation.

Applications

LBS AC1000 load break switches can be used in applications with non standard voltage levels. There are many PV inverters today on the market with higher output voltages (up to 800V AC).

Can be also used in applications with harsh operating conditions such as paper mills or the metallurgy, chemical, petrochemical or mining industries.

LBS AC is designed for all heavy duty applications up to 1000 VAC - AC 22. It offers a total adaptability to any environment thanks to a wide variety of accessories.

Technical data (according to IEC 60947-3):

Type	LBS 200 3P AC1000	LBS 400 3P AC1000
Conventional free air thermal current I_m at 35 °C	200 A	400 A
Rated insulation voltage U_i	1250 V	1200 V
Rated impulse withstand voltage U_{imp}		12 kV
Rated operational voltage U_e		1000 V
Utilisation category		AC-22B
Rated operational current I_c	200 A	400 A
Rated frequency		50 / 60 Hz
Rated short-time withstand current I_{sw} 1s		8 kA
Rated short-circuit making capacity I_m		13,6 kA peak



LBS 200 3P AC1000




LBS 400 3P AC1000



LBS AC1000 load break switches (IEC 69047-3)

Type	Code No.	Nr. Of poles	I_e [A]	 g	
LBS 200 3P AC1000	004661923	3	275	1850	1/1
LBS 400 3P AC1000	004661924	3	400	4550	1/1


GREEN PROTECT / PV Switch Disconnectors

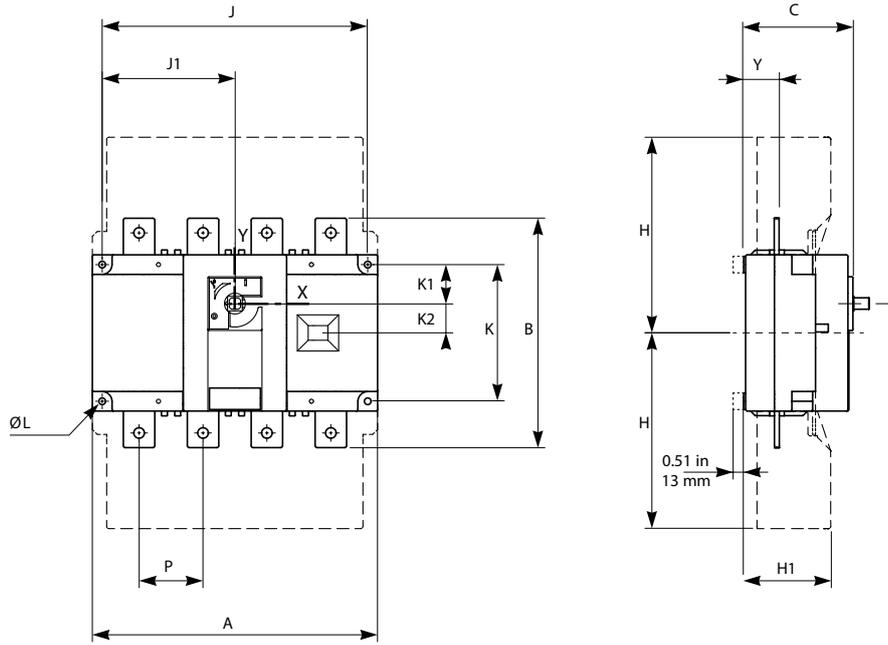

Type	Dimensions (mm)													
	A	B	C	H	H1	J	J1	K	K1	K2	ØL	P	Y	
LBS 200 3P AC1000	180	160	78,5	145	56	160	55	80	20	20	5,5	50	22	
LBS 400 3P AC1000	230	235	111	201	85,5	210	75	140	40	30	7	65	36	

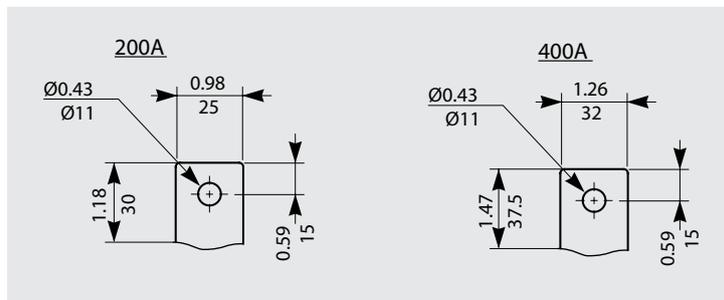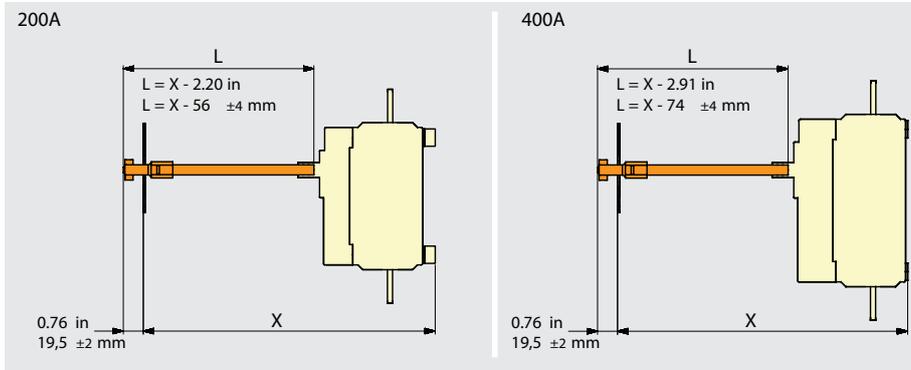

Mounting orientation



Accessories for LBS DC and LBS AC1000 switches

Direct handle for direct operation LBS

Type	Code No.	Description	For use with		
LBS-DH630/B	004661481	Direct handle black	LBS100-500DC (1000V, 1500V), LBS 200 3P	100	1/25
LBS-DH630/R	004661861	Direct handle red	AC1000, LBS 400 3P AC1000	100	1/80



Door interlocked handle IP65

Type	Code No.	Description	For use with		
LBS-EH630/G .../400/G FLBS	004661483	Door handle Black	LBS100-500DC (1000V, 1500V), LBS 200 3P	250	1/20
LBS-EH630/YR	004661486	Door handle Red	AC1000, LBS 400 3P AC1000	250	1/20

*shaft not included



Shaft for door interlocked handle

Type	Code No.	Description	For use with		
LBS-S200/630 (CO) .../400 FLBS	004661490	Shaft 200mm	LBS100-500DC (1000V, 1500V), LBS 200 3P	160	1/25
LBS-S320/630 (CO) .../400 FLBS	004661493	Shaft 320mm	LBS 200 3P	250	1/50
LBS-S500/630 (CO) .../400 FLBS	004661496	Shaft 500mm	AC1000, LBS 400 3P AC1000	390	1/10



Terminal screen

Type	Code No.	Description	For use with		
LBS-TS500 3P DC	004661865	Terminal screen, 3P DC1500	LBS 3P DC1500	60	1/100

1 reference includes 1pc for top or bottom contacts, to protect all, 2 references shall be ordered



Terminal shrouds

Type	Code No.	Description	For use with		
LBS-TS250 3P (CO)	004661501	Terminal shrouds, 3P	LBS 200 3P AC1000	121	1/10
LBS-TS630 3P (CO)	004661502		LBS 400 3P AC1000	242	1/5

One reference includes 3 pcs (3pole) for top or bottom contacts, to protect all 2 references shall be ordered



Bridging bars

Type	Code No.	Description	For use with		
LBS-BR500 1P DC	004661864	Bridging bars, 1pole	LBS ... DC 1000	60	1/100

1 reference includes connection for 1 pole




Auxiliary contact

Type	Code No.	Description	For use with		
LBS-PS11	004661499	Auxiliary contact (CO)	LBS ... DC1000, DC1500, LBS 200 3P AC1000, LBS 400 3P AC1000	26	1/30




GREEN PROTECT / PV Switch Disconnectors

Handle type LBS-EH630


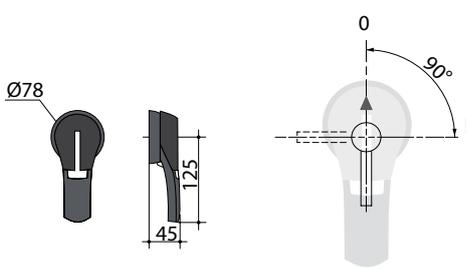


Door drilling



Direct front operation

Mounting position LBS DC

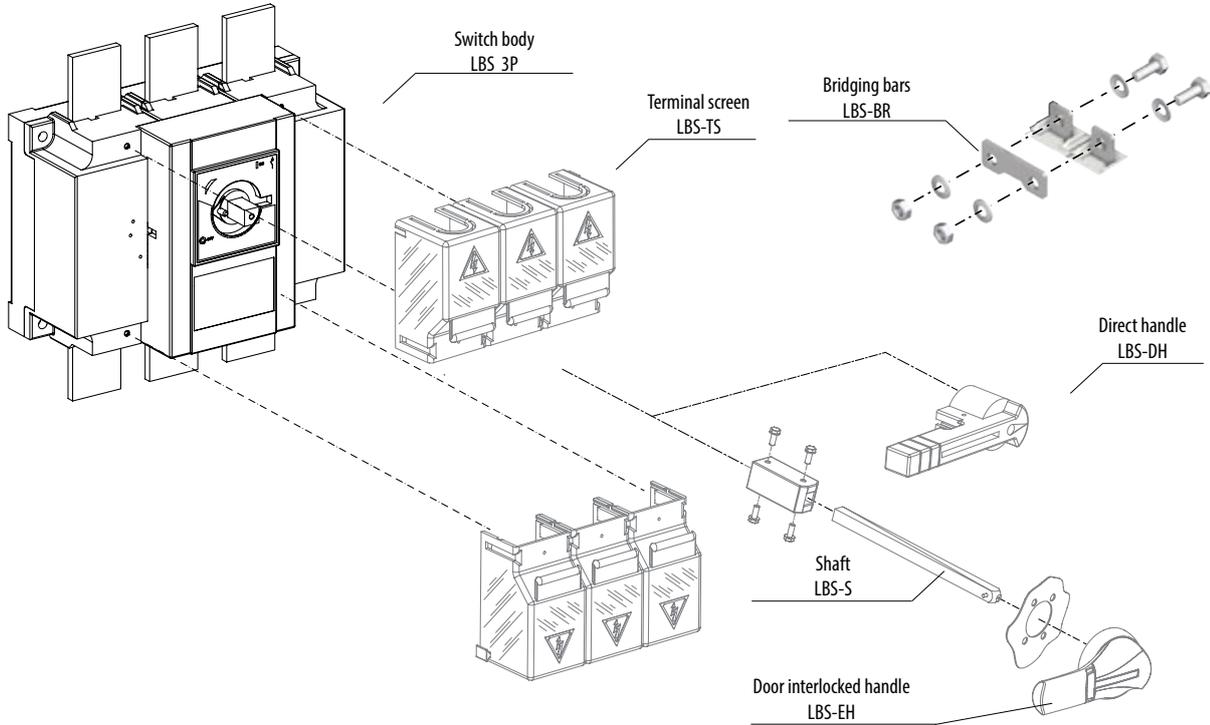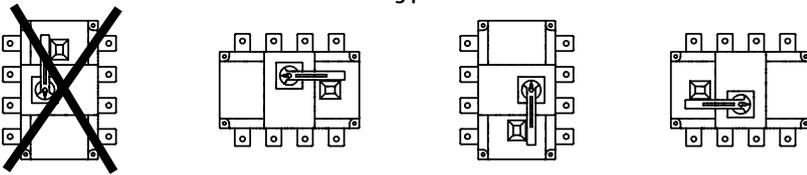

ENCLOSURES



 etigroup
www.etigroup.eu




**Empty And Ready
Made Junction Boxes**

ETI
SWITCH TO
A SAFE FUTURE

Ready made DC-junction boxes

For more technical, ordering and other information, please see our catalogue [Solutions](#)


How to choose correct protection for PV junction boxes

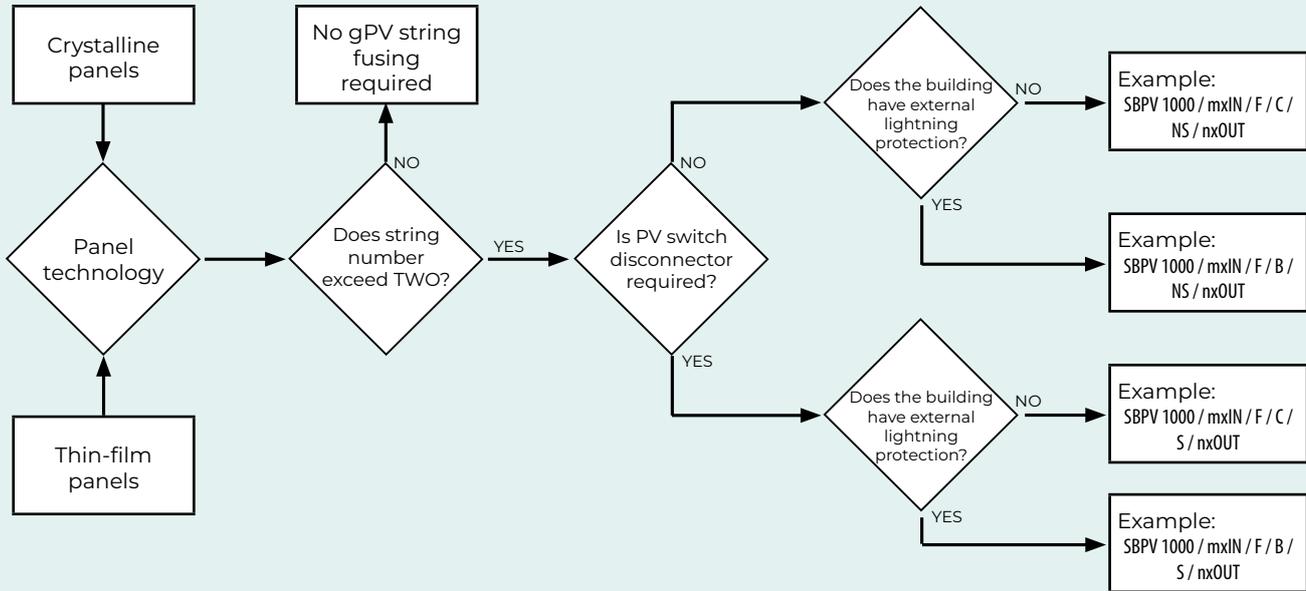


Design recommendations

Central inverter - PV system


Photovoltaic modules are protected against reverse currents with cylindrical gPV fuse-links inserted in cylindrical fuse holders. Photovoltaic arrays are then connected to the central inverters protected with NH gPV fuse-links inserted in NH fuse bases or direct mounted on the busbar system. On the combiner and the inverter level, SPDs and switch disconnectors are used.

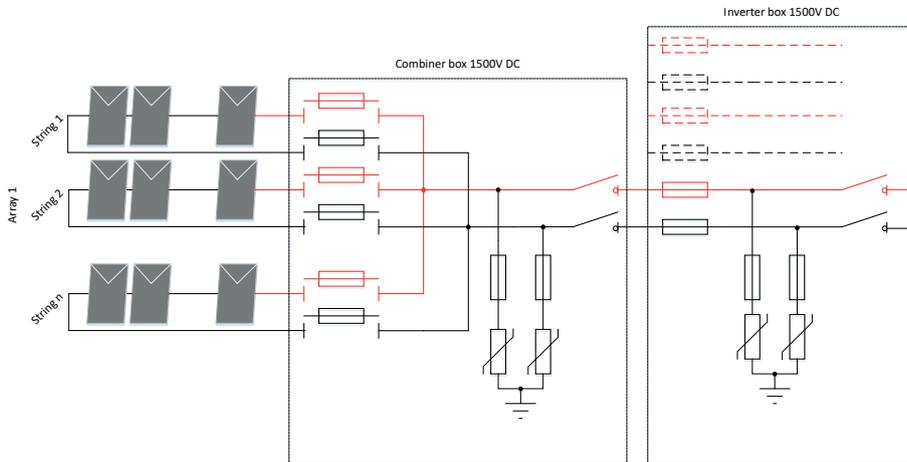

Basic scheme of central inverter PV system

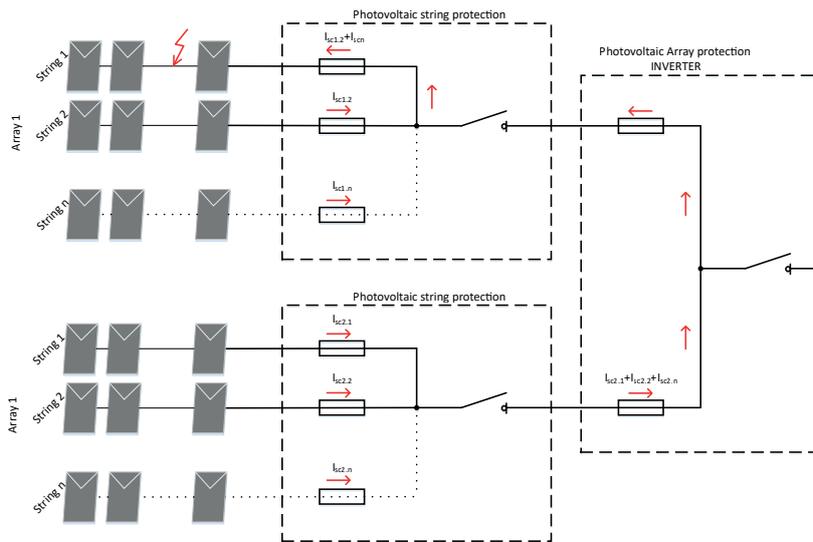


Protection of reverse current by CH gPV fuse-link

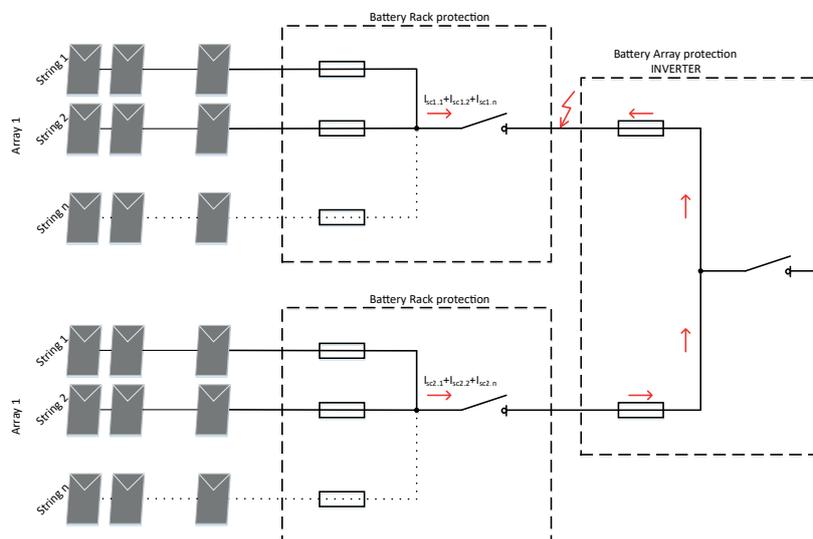


Protection of PV array by NH gPV fuse-link

String inverter - PV system

Photovoltaic modules are connected to string inverter. On a.c. side of string inverter there are gG or gS NH fuse-links inserted in NH fuse bases or disconnectors. On the combiner level, SPDs and switch disconnectors are used.

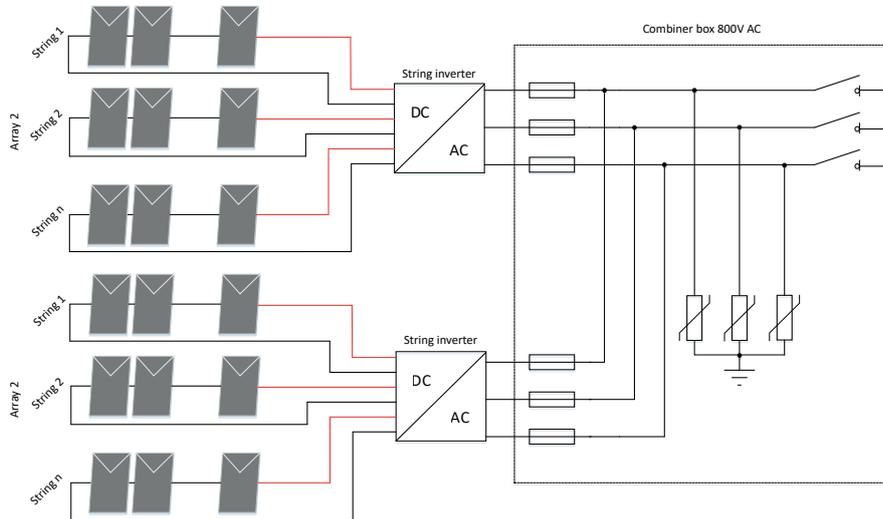

Basic scheme of string inverter PV system

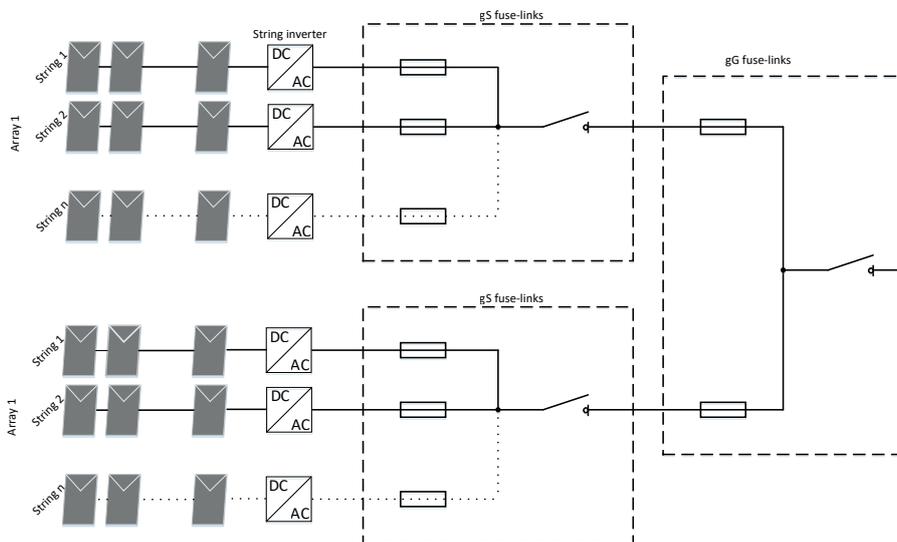


Protection on combiner level with gS and recombiner level with gG characteristic fuse-links

In-Line PV system


In-Line PV systems could be used in central or string inverter systems.

Photovoltaic modules are protected against reverse currents with cylindrical In-Line gPV fuse-links.

Photovoltaic strings are on array level combined in recombiner boxes protected with cylindrical gPV fuse-links inserted in cylindrical fuse holders. Recombiner boxes are then connected to the central inverters protected with NH gPV fuse-links inserted in NH fuse bases or direct mounted on the busbar system. On the recombiner and the inverter level, SPDs and switch disconnectors are used.


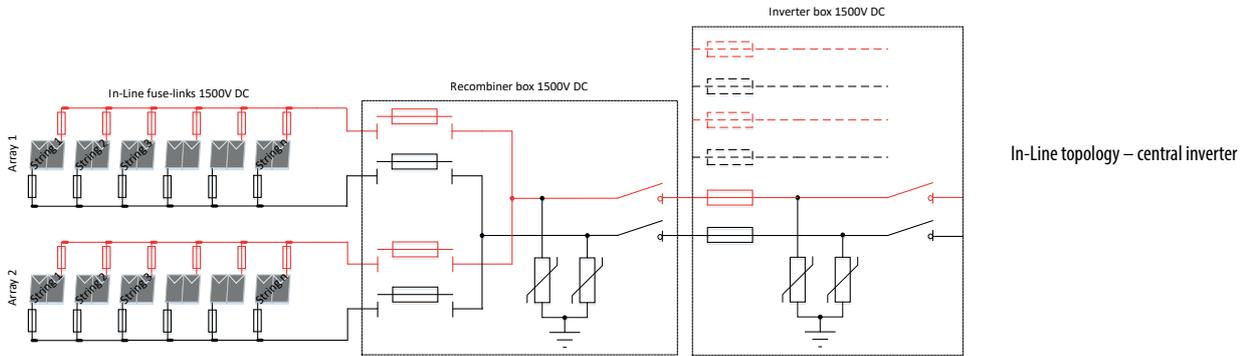


Photovoltaic strings are on array level combined in the wire harness. Wire harnesses are then connected to the string inverters. On a.c. side of string inverter there are gG or gS NH fuse-links inserted in NH fuse bases or disconnectors. On the combiner level, SPDs and switch disconnectors are used.

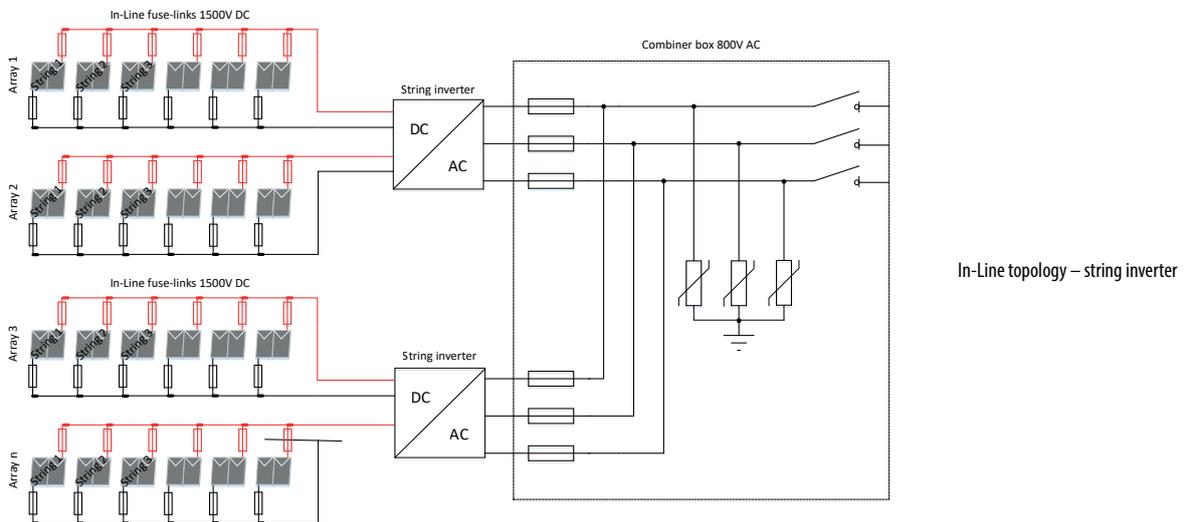


Battery system

Battery modules are in series connected in battery racks. Battery racks are protected with battery fuse-links in d.c. combiner boxes. D.c. combiner boxes are then connected to the battery inverter protected with NH fuse-links inserted in NH fuse bases.

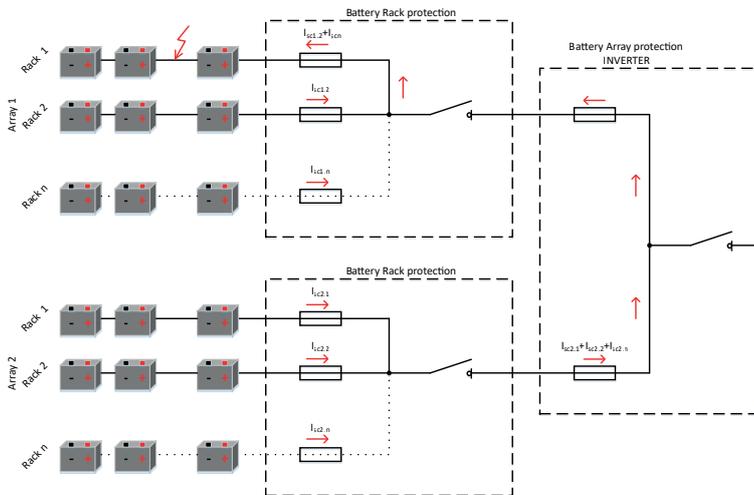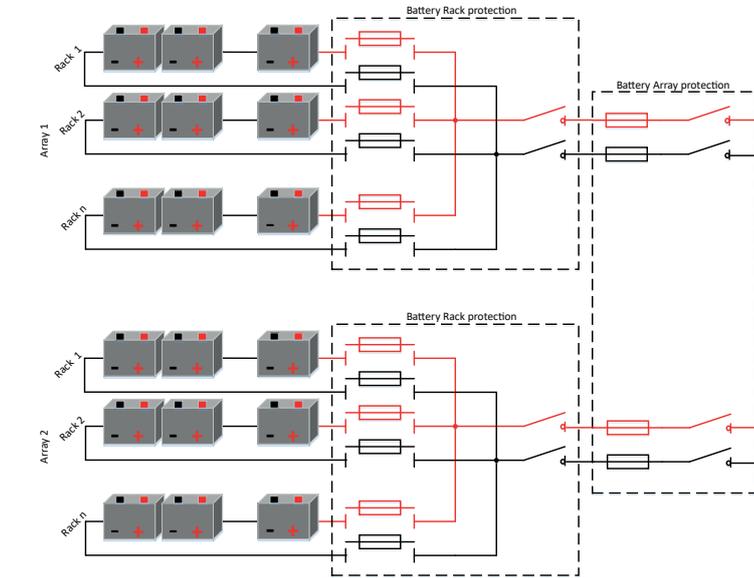


Protection of battery racks

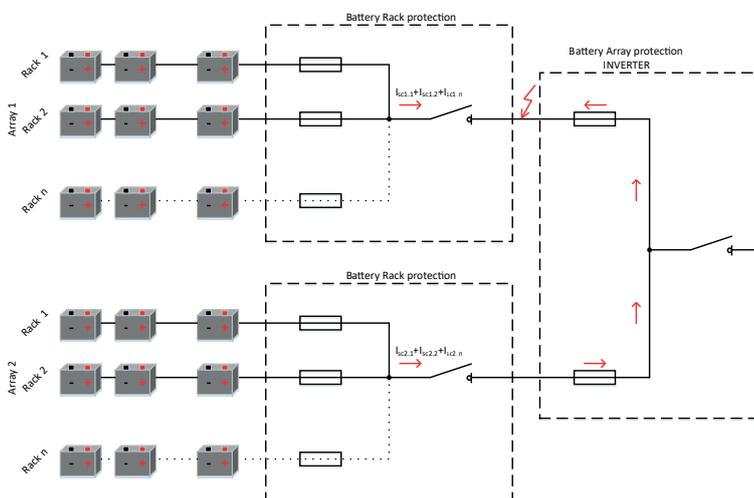

Protection of battery array

How to choose the correct Battery fuse - example

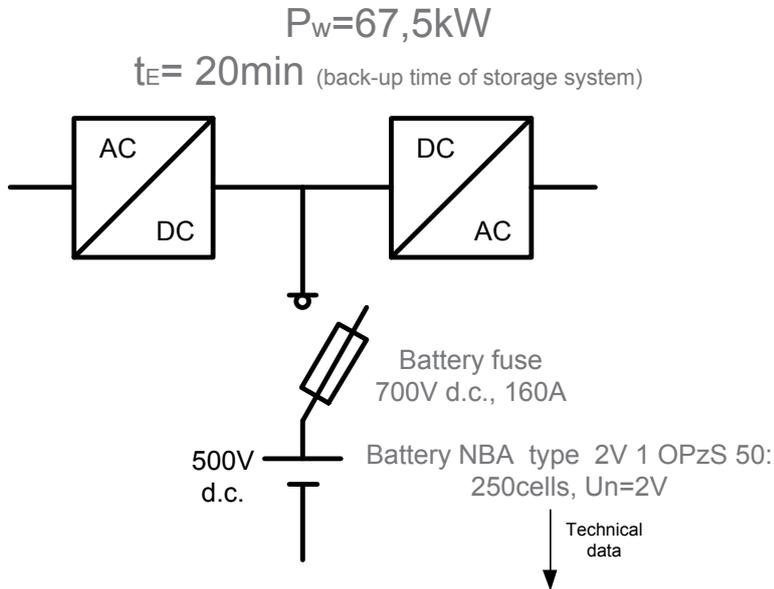

1. Short circuit point (I_k):

2. Types, capacities, dimensions, mass

Type	C10	C5	C3	C1	Ri 1)	I_k 2)	length	width	height max	mass 3)	mass 4)
	Ah	Ah	Ah	Ah	mΩ	kA	mm	mm	mm	kg	kg
<u>2V 1 OPzS 50</u>	<u>50</u>	45	36	24	3,96	<u>0,58</u>	103	206	426	4,5	7
2V 2 OPzS 100	100	85	66	48	1,98	1,16	103	206	426	7,5	6,5
2V 3 OPzS 150	150	125	102	72	1,27	1,74	103	206	426	10	6
2V 4 OPzS 200	200	170	138	96	1,01	2,06	103	206	426	12	6
2V 5 OPzS 250	250	210	171	120	0,81	2,57	124	206	426	14	7,5
2V 6 OPzS 300	300	250	204	144	0,69	3,14	145	206	426	16	9
6V 3 OPzS 150	150	125	107	75	3,71	0,62	233	224	426	23,5	13,5

1, 2) internal resistance and short - circuit - current according to IEC 886-1 3) dry-charged 4) filled and charged



$I_k = 580A$

2. Operating point (t_E/I_B):

$t_E = 20min$ (1200s)

$U_E = 250cells \times 1,8V = 450V$ d.c.


$I_B = P_w/U_E \dots 67,5kW / 450V = 150A$

3. DC rated fuse link:


Battery fuse 700V d.c., L/R=10ms

NH00 gG 160A 690V a.c. **problem DC rating at min. breaking capacity ~ 2xIn** ???


1. Short circuit point (I_k)


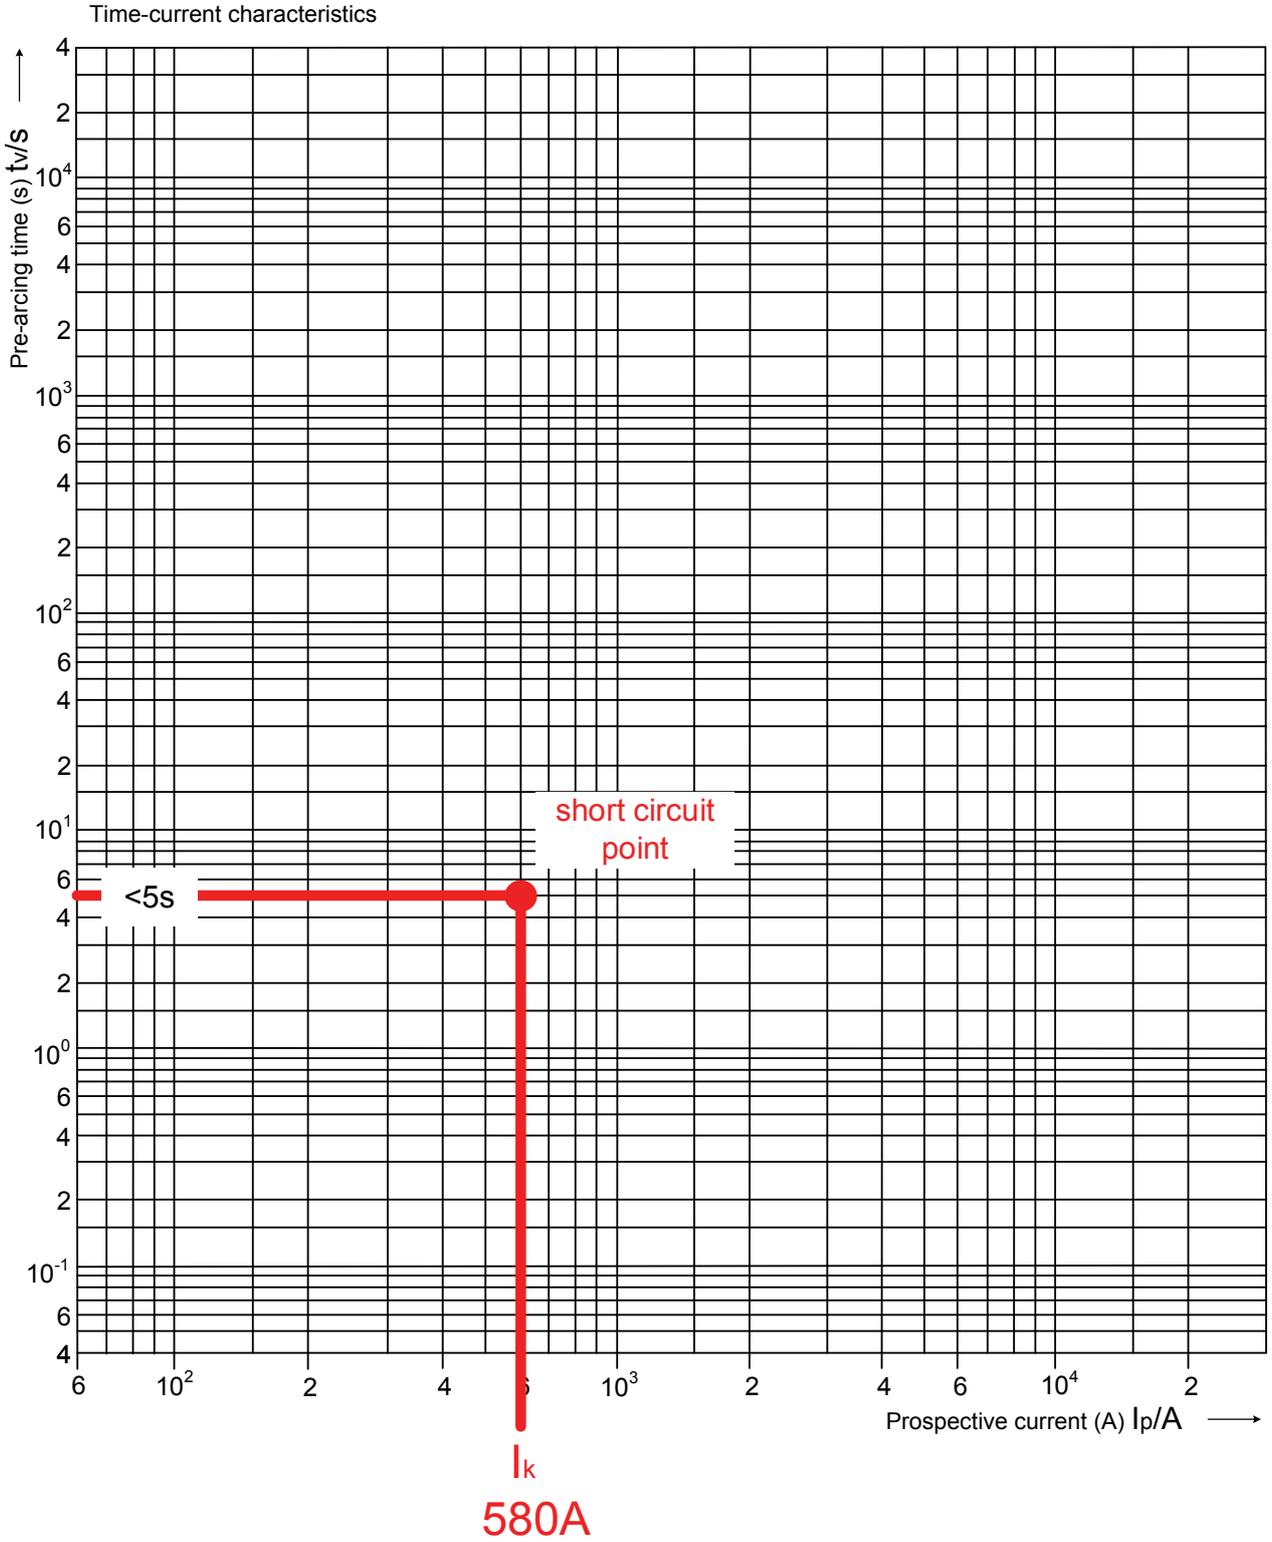


2. Operating point (t_E/I_B)

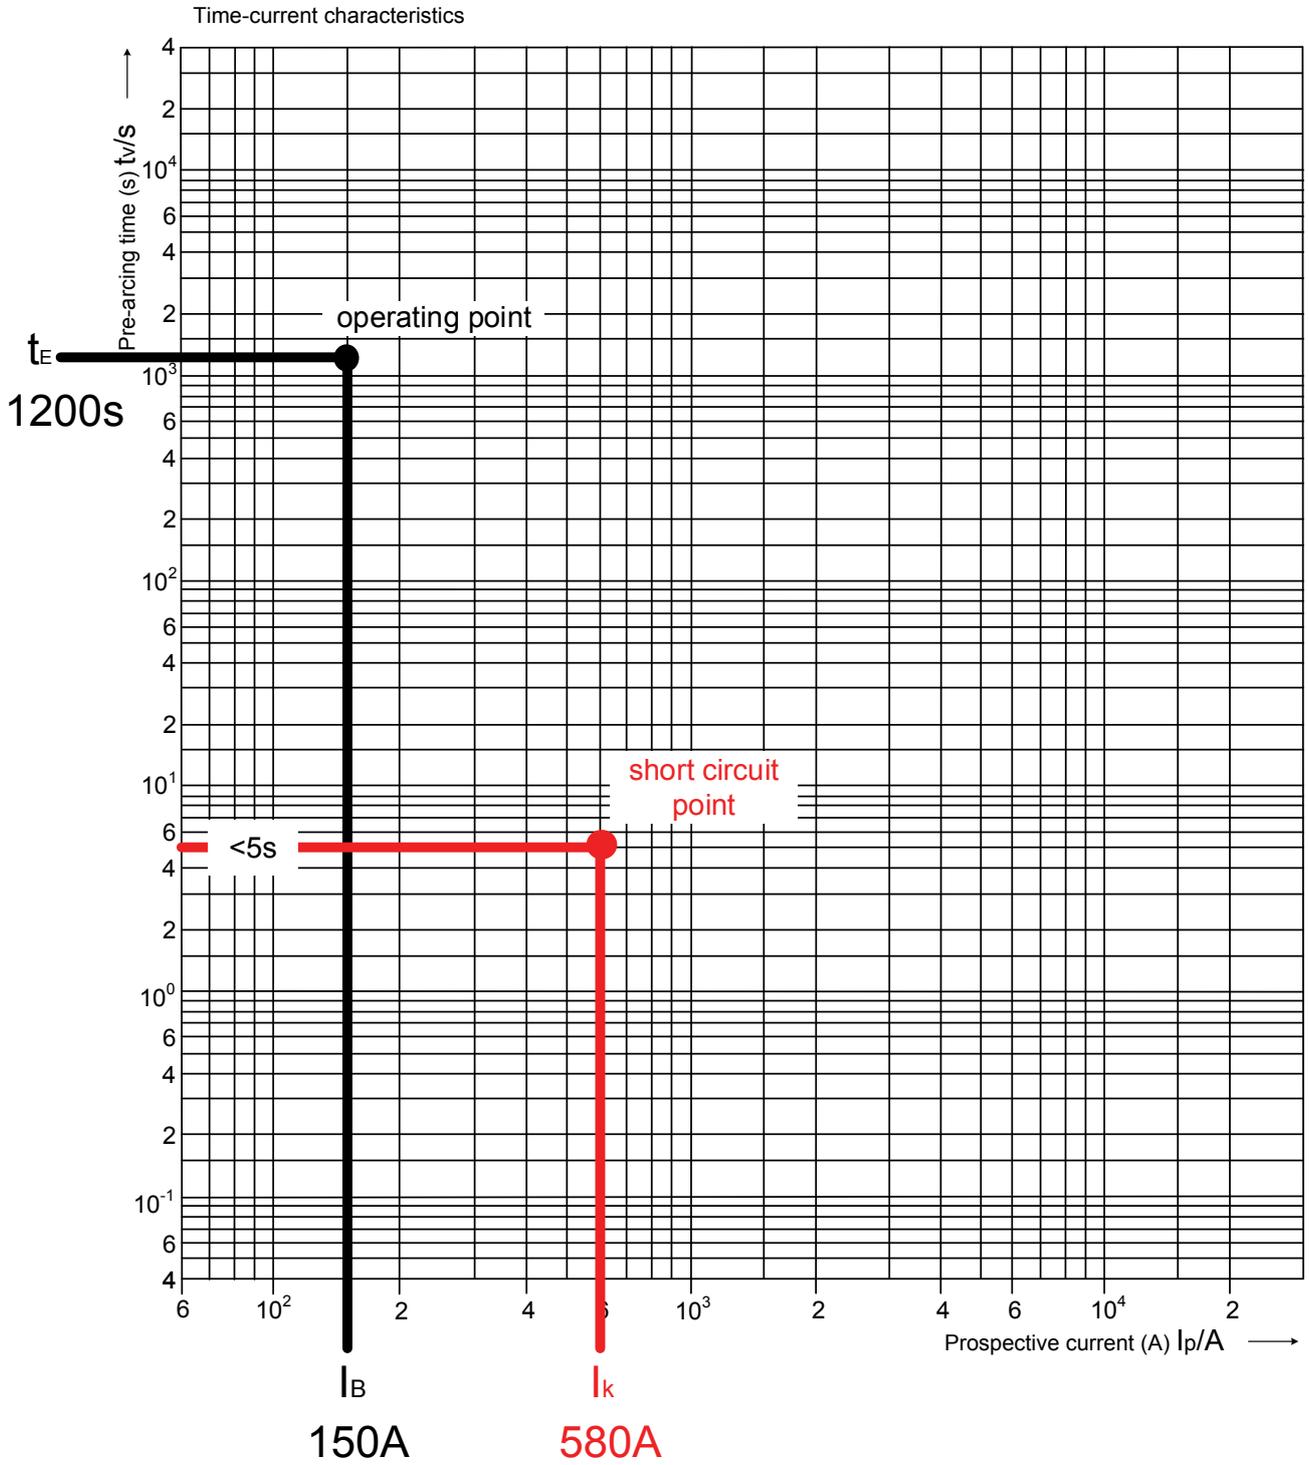


Battery fuse selection - I/t characteristic

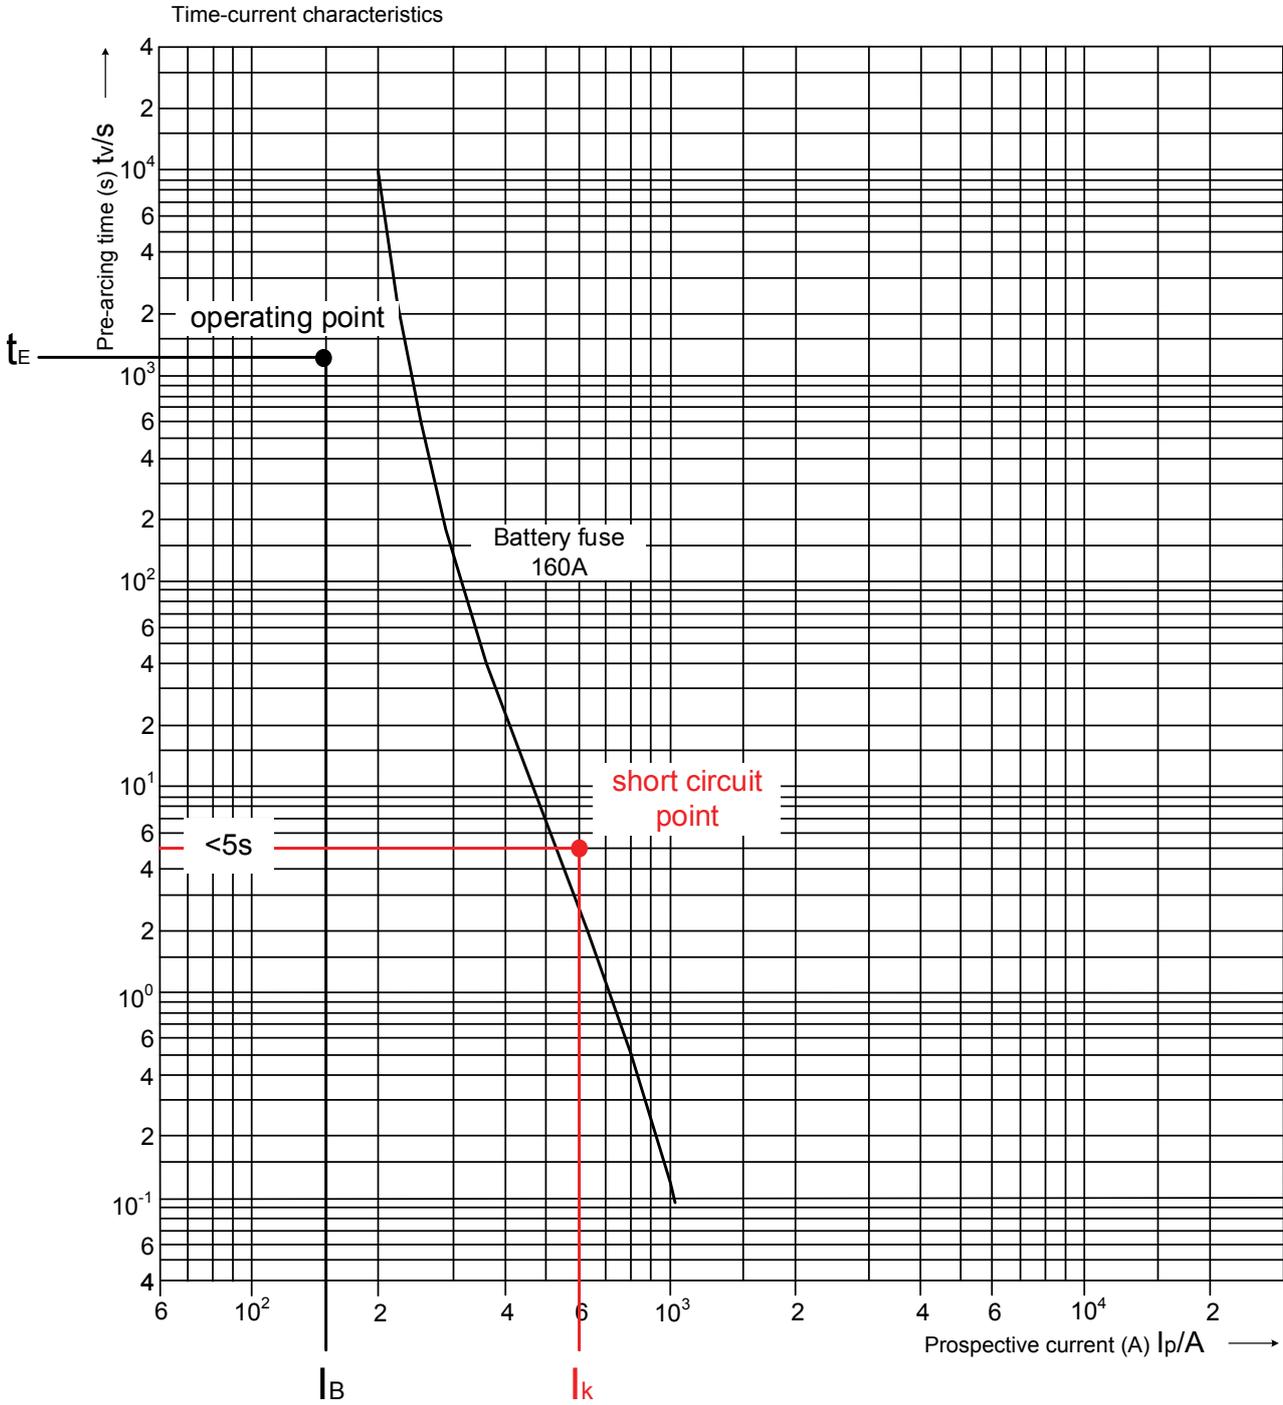


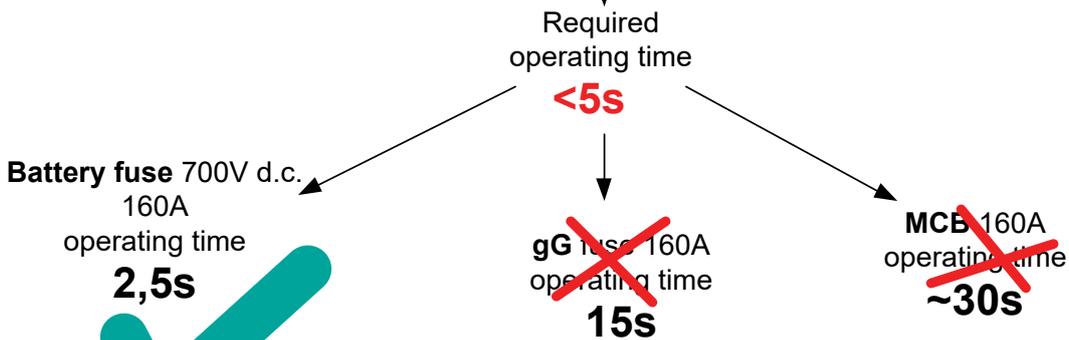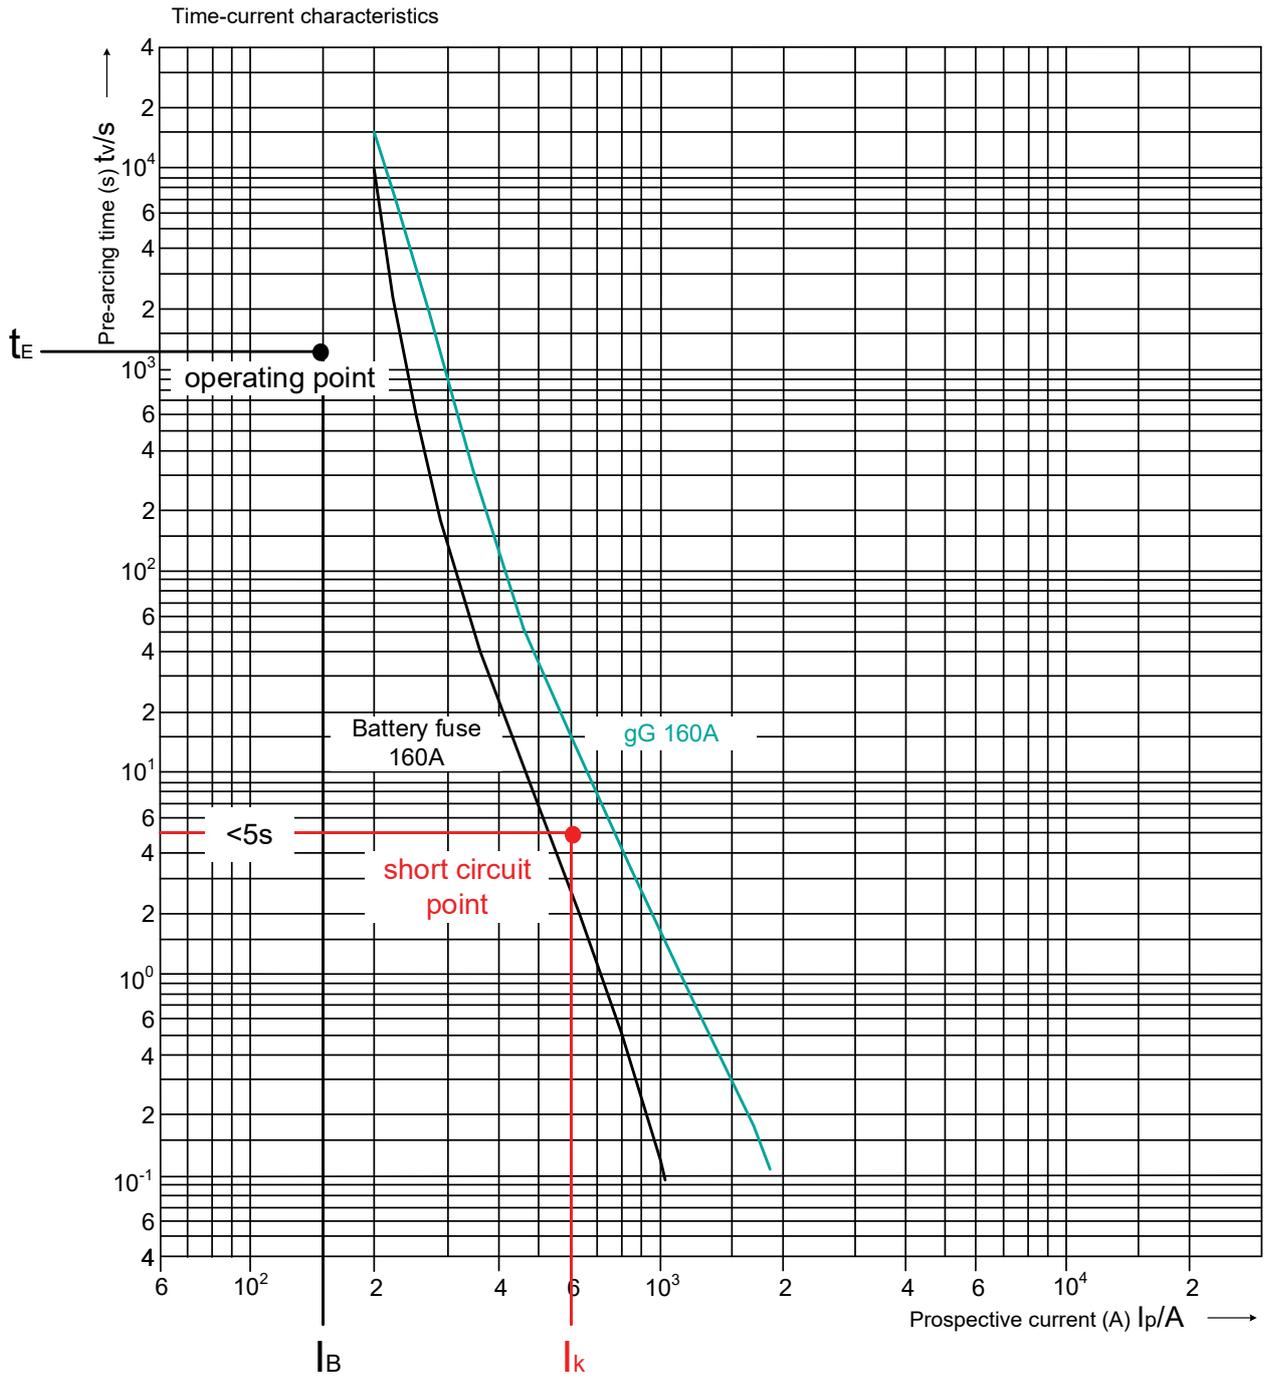

Battery array

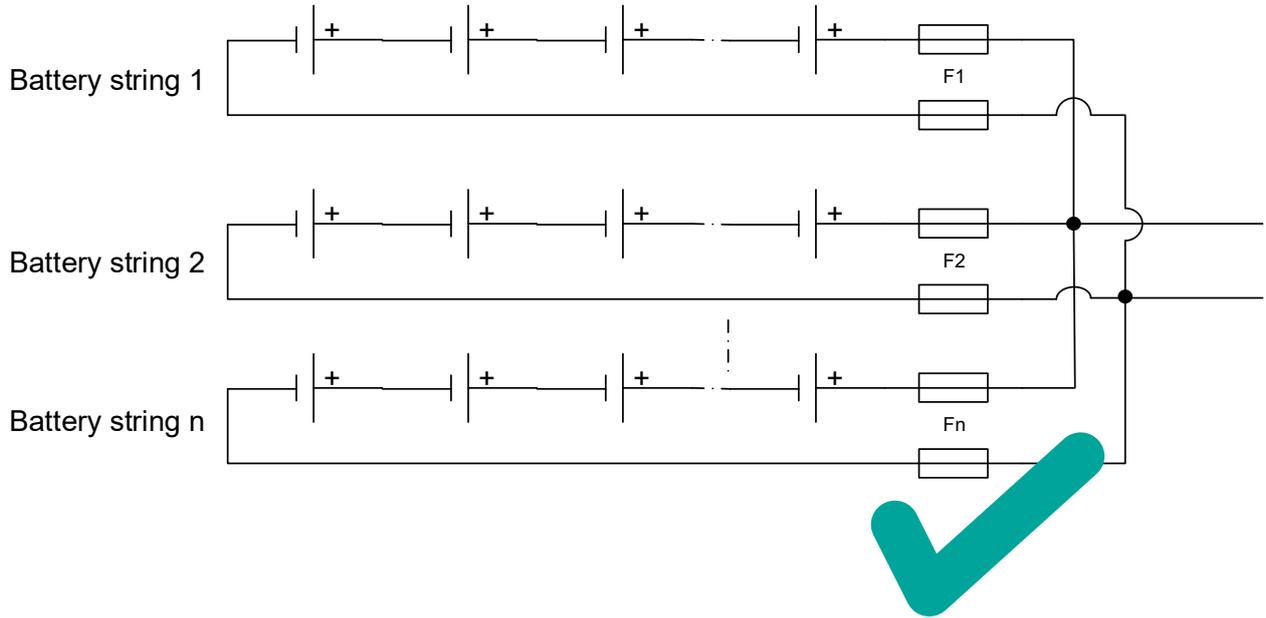

Battery array

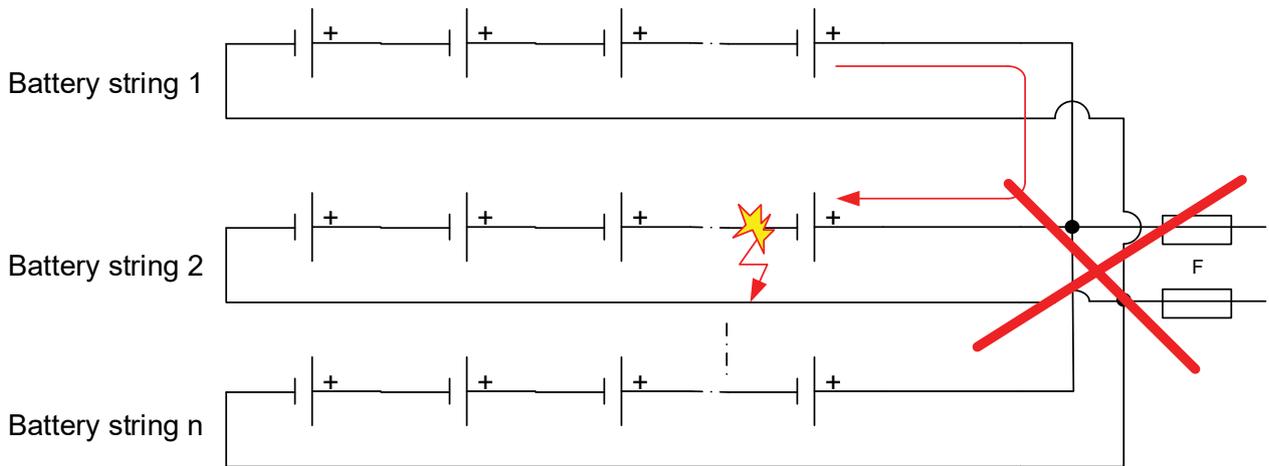

For battery banks with parallel strings, a good practice is to include overcurrent protection for each battery string. This minimizes the potential of the bank backfeeding a single shorted battery, which can lead to fires and property damage.

Battery-string fusing is best accomplished with appropriately sized dc-rated fuses secured in bolt-in fuse holders that are housed in a single enclosure. This arrangement makes it easy to isolate one battery string for testing or maintenance while allowing the system to continue operation. Individual battery-string fuses can provide protection against catastrophic failure in the event of a major fault in the main disconnect breaker panel or elsewhere in the battery bank. Series fuses on each battery string also reduce the available shortcircuit current levels, allowing for the use of lower ampere interrupting current rated circuit breakers for the inverter/ charger disconnects. Without the fuses, the amount of current that the circuit breaker has to interrupt during a fault could potentially exceed its rating.

Ratings for Li-ion batteries

Burst discharge (pulse) ratings for Li-ion batteries:

The first set of C ratings on a Li-ion tells us how fast the battery can be discharged.

30C / 60C
translates to
(maximum constant discharge rate) / (Burst discharge rate)

Bursts can last for less than 5 seconds. To determine the amp rate, you need to know the capacity of the battery pack. If the pack indicates that it has a capacity of 2.3Ah, take the number before 'Ah' and multiply it by 30 to find the number of amps. In this case, it would be 69A. This represents a rating of 30C for that pack.

Therefore, the burst rate would be $2.3 \times 60 = 138A$ for up to 5 seconds.



Specifications: Hypersonic 2300 6.6V

Product Summary: 2S1P cell configuration Li Ion Deans Ultra output/charge connector Balancing connector (Balancing only with Sonic Charge™)	Voltage: 6.6V Capacity: 2300 mAh Max C-rate cont. 30C Max C-rate pulse 60C Max Current cont. 69A (limited by connector) Max Current pulse 138A Max temperature* 160F/71°C Size (length x diam) 135mm x 28mm Weight: 155g
--	---

Product Specifications

Type:	Lithium Ion
Capacity:	2300 mAh
Voltage:	6.6V
Connector Type:	Deans Ultra (WSD1300)
Number of Cells:	2
Weight:	155g
Configuration:	2S1P
Length:	5.31 in (135mm)
Width:	1.10 in (28.0mm)
Height:	1.10 in (28.0mm)
Maximum Continuous Discharge :	30C
Maximum Burst Discharge :	60C

Examples of maximum discharge current for Lead-acid and Li-ion batteries:

Internal Resistance (Fully Charged Battery)	<12m Ω
Maximum Discharge Current For 5 sec.(A)	180A

Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	1000A(5s)
Short Circuit Current	3300A

Capacity	200 Ah(200Ah)
Weight	Approx. 5.9 Kg
Max. Discharge Current	200 A (5 sec)
Internal Resistance	Approx. 12 m Ω
Operating Temperature Range	Discharge: -20°C →

Continuous discharge current	100 A	100 A
Max discharge impulse current:		
(10 min)	200 A (temperature controlled)	200 A (temperature controlled)
(5 sec)	>500 A	>500 A
(1 sec)	>1000 A	>1000 A
Continuous charge current	100 A	100 A

Max. Discharging Rate	<ul style="list-style-type: none"> • 66A (30.0C), Maximum continuous discharge, Recommended • 132A (60.0C), Maximum Burst rate < 5 seconds
Dimensions (LxWxD)	116mm(4.6") x 38mm(1.5") x 40mm(1.6")
Weight	10.8 Oz (300 g)





A few reasons why protection of batteries with simple fuse link is not OK:

- Flammable hydrogen gas is always present during battery recharging. Hydrogen gas is potentially explosive if allowed to accumulate in a closed area.
- Prevent open flames, sparks, or **electrical arcs** in the battery charging area to minimize the danger of explosion.
- Breaking capacity of »fork lift fuse link« is less than 1kA at nominal voltage!


Comparison characteristics

Battery fuse ← → Semiconductor protection fuse

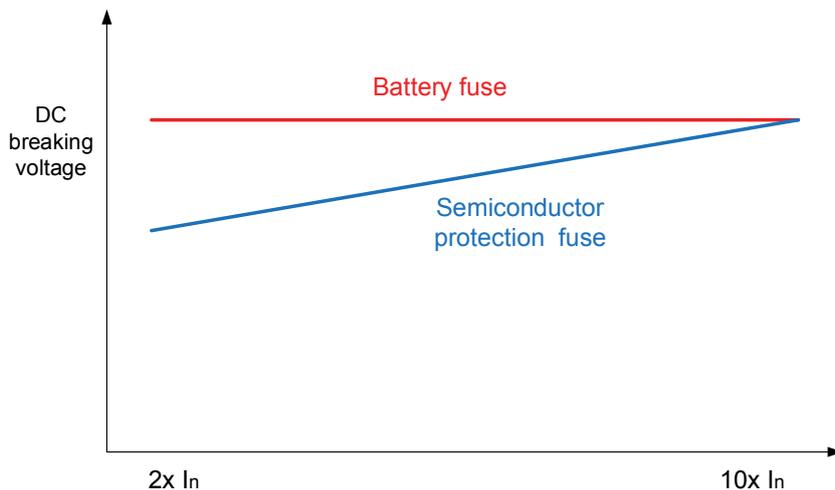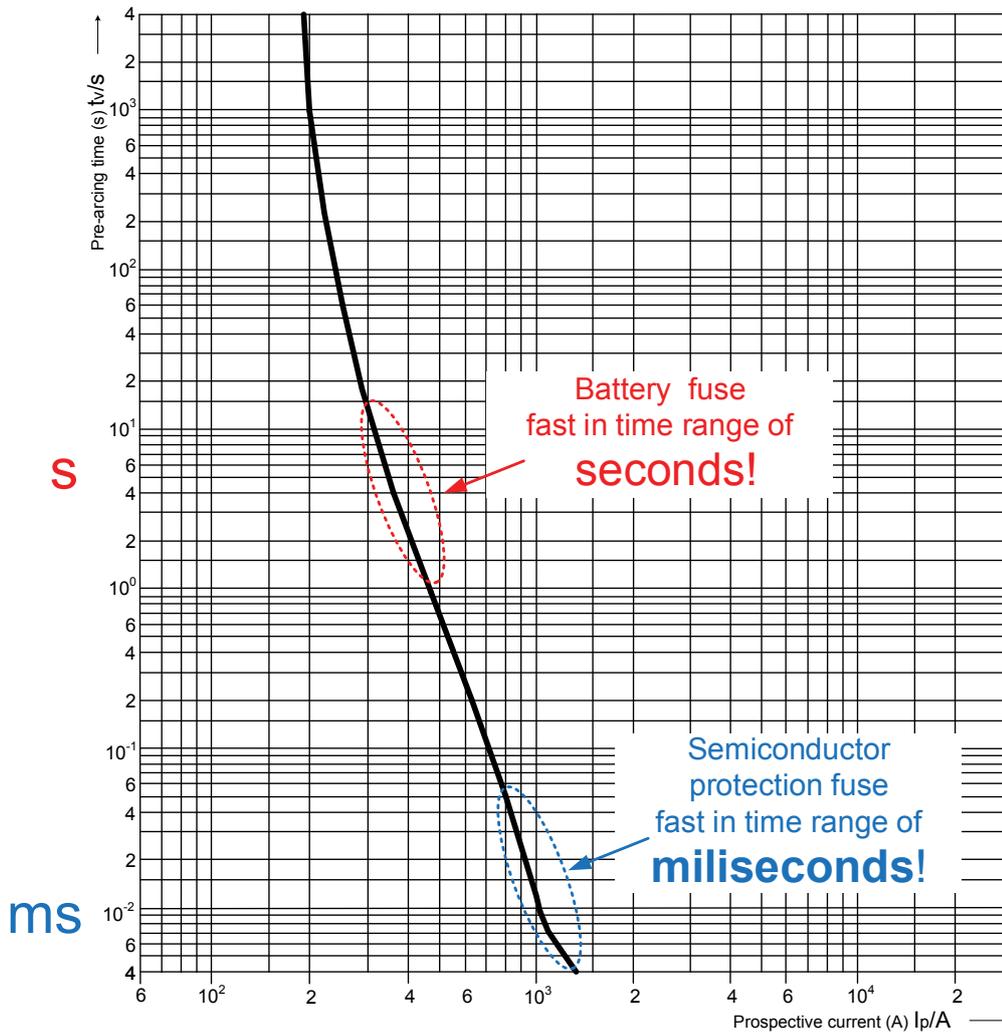




Solutions

Example 1: Meter distribution board

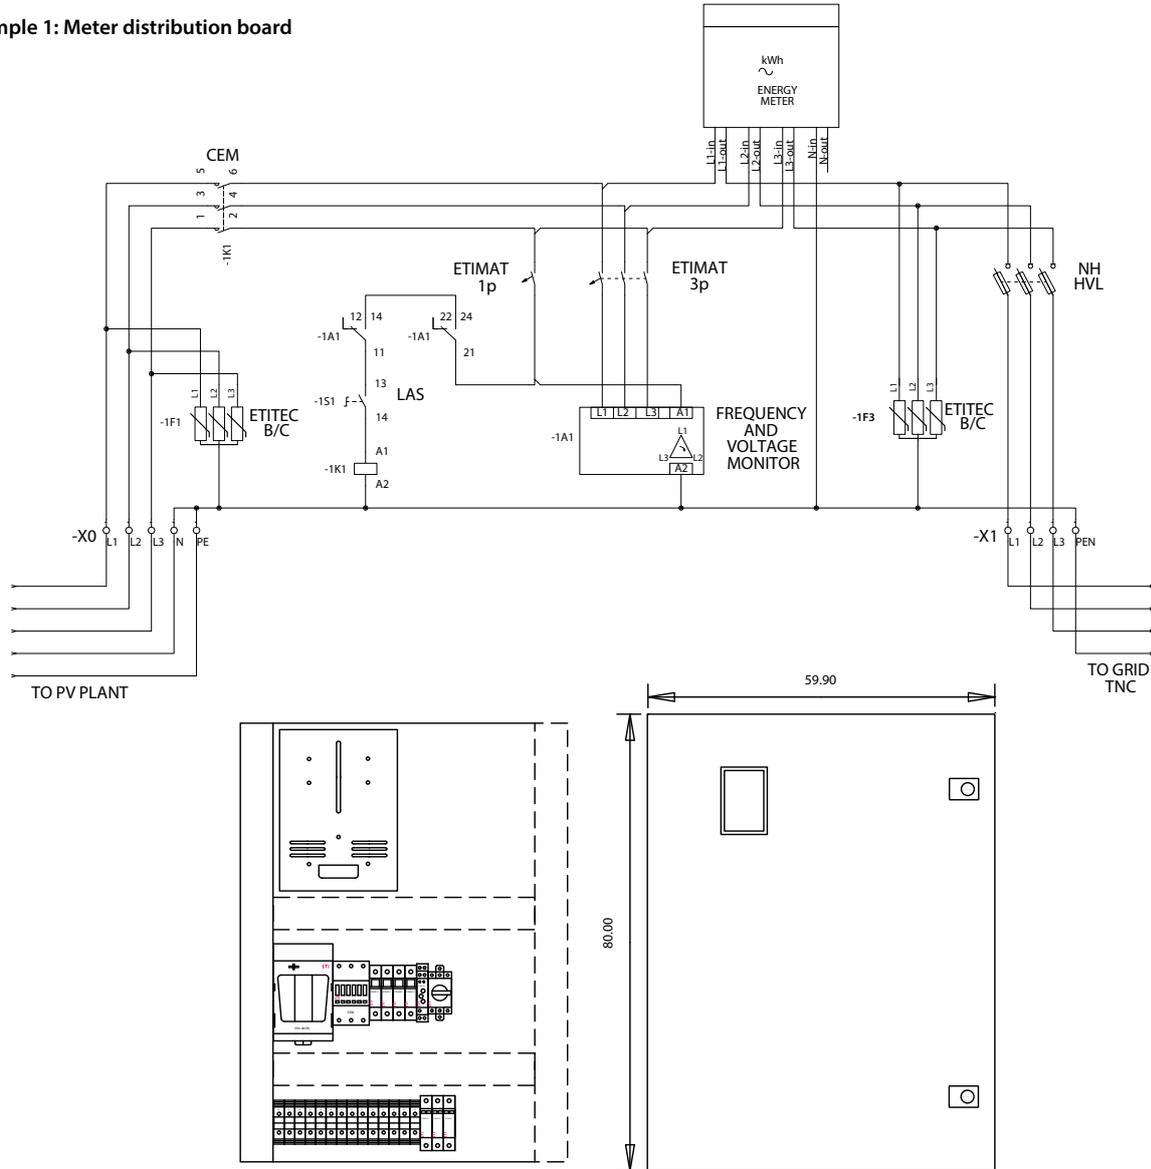

Quantity [pcs]	Code No.	Description
1	001102133	GT 80-60-25
1	002440141	ETITEC B-F 320/12,5 F 3+0
1	004648103	ETICON CEM 50.00 230V
1	002115512	ETIMAT 6, B, 6A, 3P
1	002111512	ETIMAT 6, B, 6A, 1P
1	001701250	HVL EK 00, 3p
3	004181213	NH 00 C KOMBI 80 A, gG 500 V
1	004660011	ETISWITCH LAS 1
2	002911001	35 mm TH rail NVS35/7,5 1m
1	001117002	3F, VPO
1	002471416	HRN-54
10	003901157	VS 35 PA
2	003901539	VS 35 PE
2	003901158	VS 35 PAN
6	003901000	VS 2,5 PA
3	003901911	IKP S 6060




Example 2: AC collector

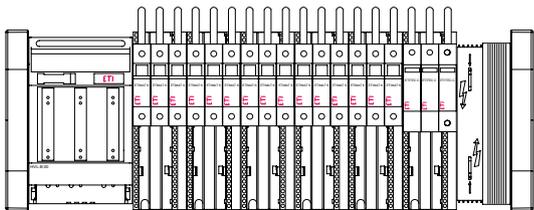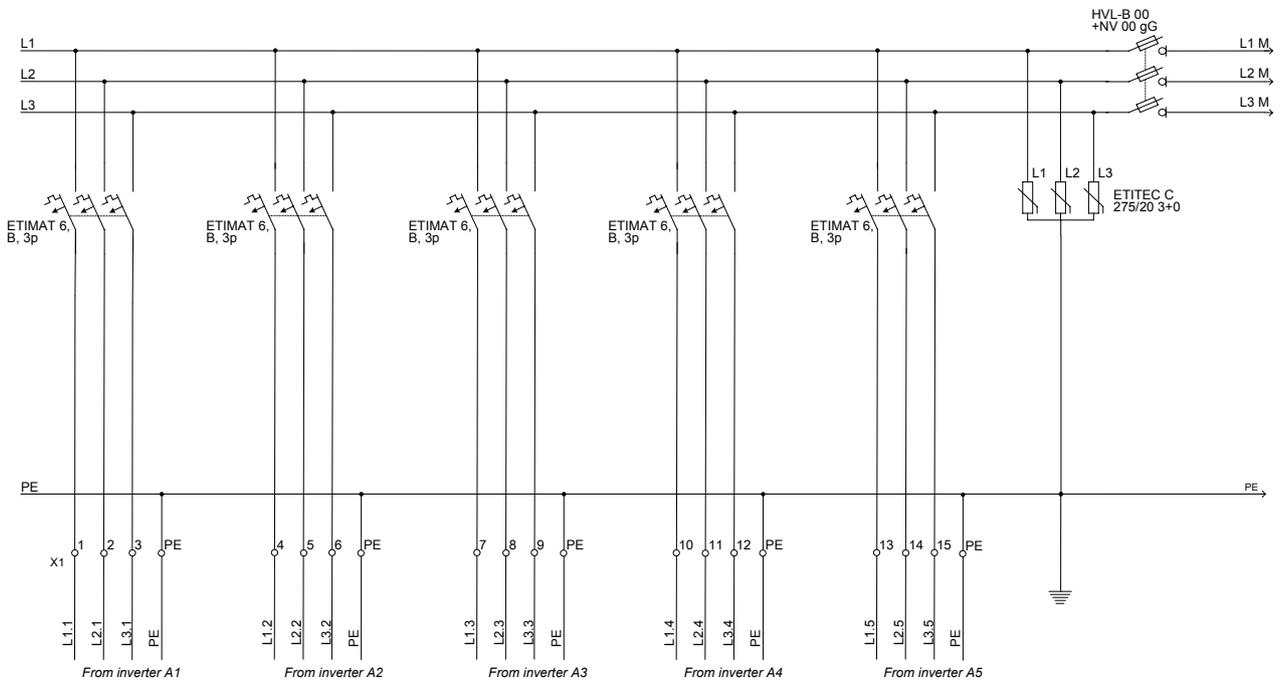

Quantity [pcs]	Code No.	Description
2	001696001	BBS-60/3
2	001696006	L-BBS-60/3
1	001696009	BBC-60/3
6	001696083	DA-60/32/72/1
1	001696042	HVL-B 00 3p M8
5	002111516	ETIMAT 6, B, 3p
1	002441522	ETITEC C 275/20 3+0
3	004183214	NH 00, 100A, gG
2	001696000	BBS-60/1
6	001696019	CT-5/16
1	001696021	CT-5/50

* see general catalogue about 60mm busbar system


Example 3: AC collector

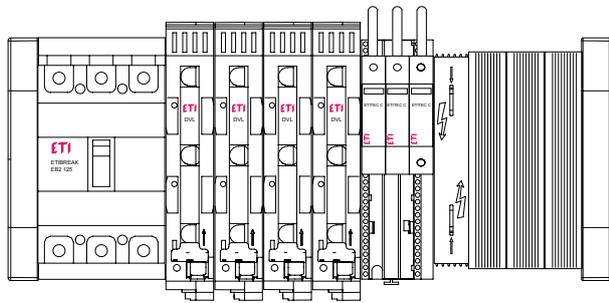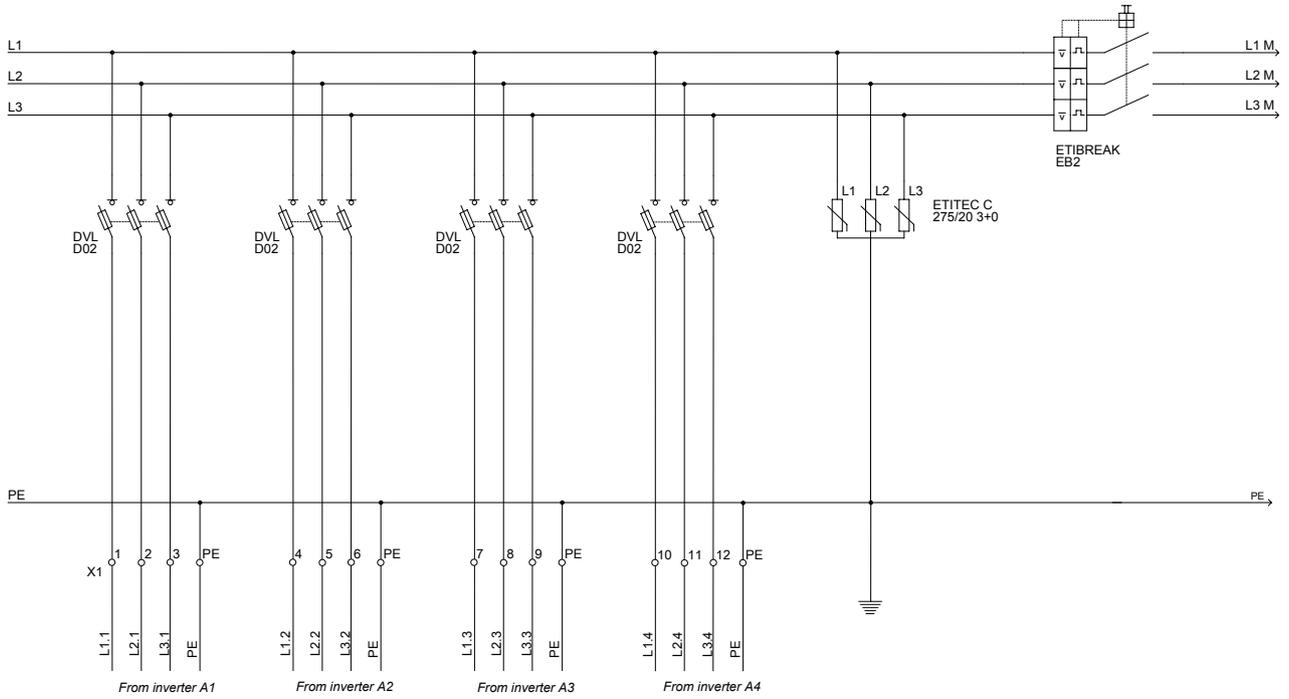

Quantity [pcs]	Code No.	Description
2	001696001	BBS-60/3
2	001696006	L-BBS-60/3
3	001696009	BBC-60/3
1	001696083	DA-60/32/72/1
4	001696050	DVL-60/183
12	002212006	D02, 32A
1	002441522	ETITEC C 275/20 3+0
1		universal MCCB adapter, frame 125
1	004671046	ETIBREAK EB2 125/3S 125A 3p
2	001696000	BBS-60/1
5	001696019	CT-5/16
1	001696021	CT-5/50

* see general catalogue about 60mm busbar system

Example 4: DC junction box

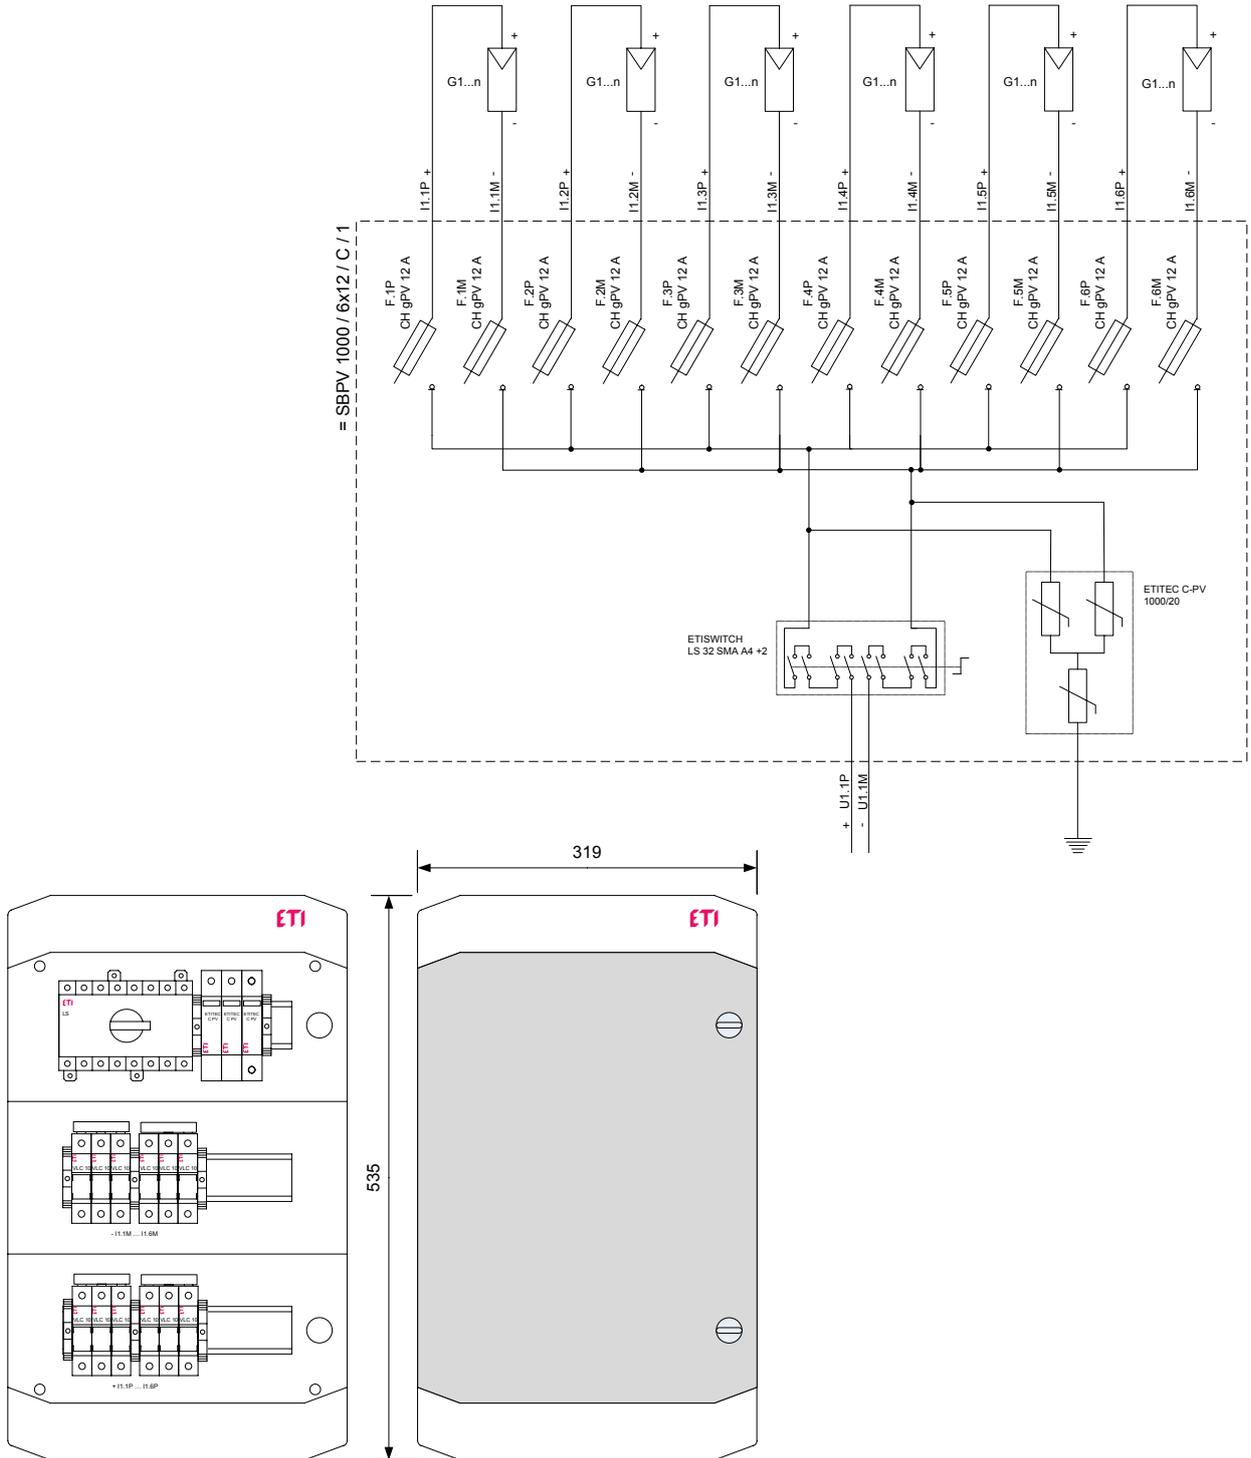


Quantity [pcs]	Code No.	Description
1	001101064	ECH-36PT
12	002540201	EFH 10 1p DC 1000V
0,25	002921101	I2S10/1F/54
12	002625106	CH10 gPV 1000V 12A
1	002445208	ETITEC C-PV 1000/20
1	004660066	LS32 SMA A4+2
8	003901016	PKPA 35 end bracket

Design on customer's request

DC junction box (NH gPV fuses)




DC junction box (CH gPV fuses)

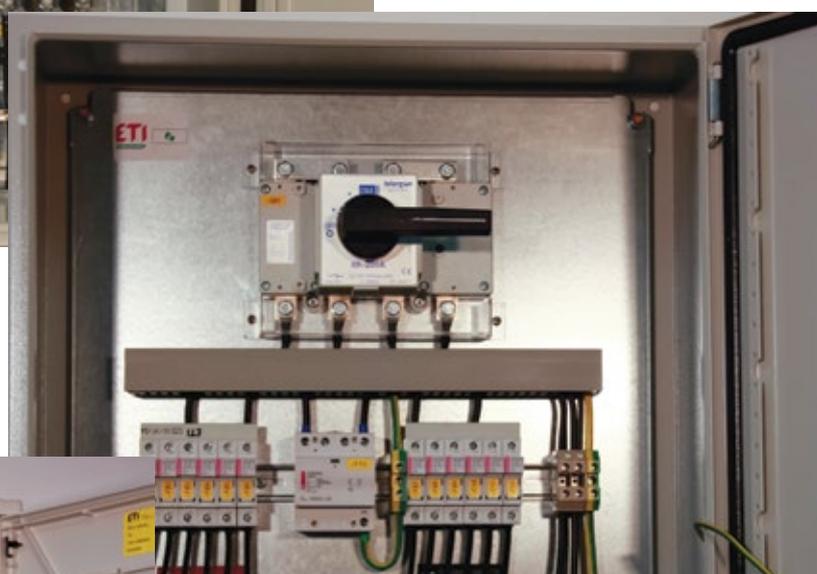


Meter distribution cabinet




PV off-grid system protection

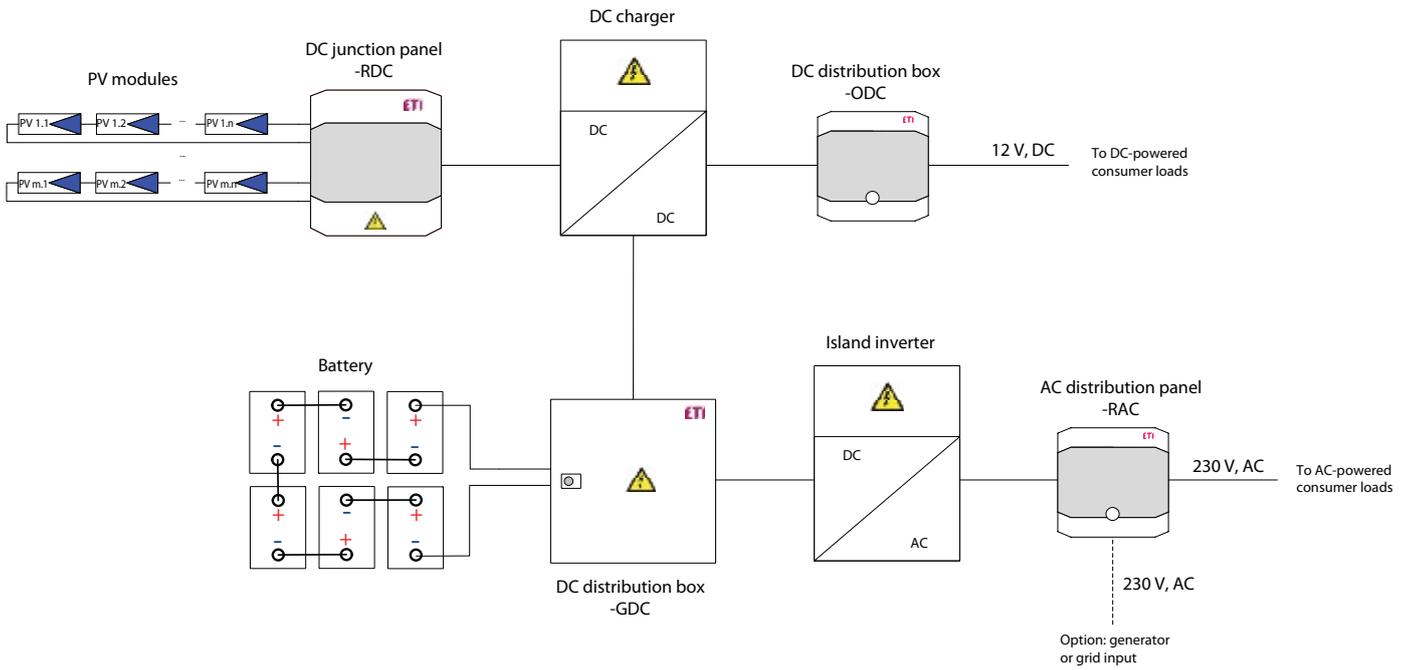


PROTECTING DC SIDE OF ISLAND PV PLANT.




Panel type ECH-12
Fuse disconnecter type: VLC 10 PV
Switch disconnecter: LS
Surge arrester: ETITEC C, PV

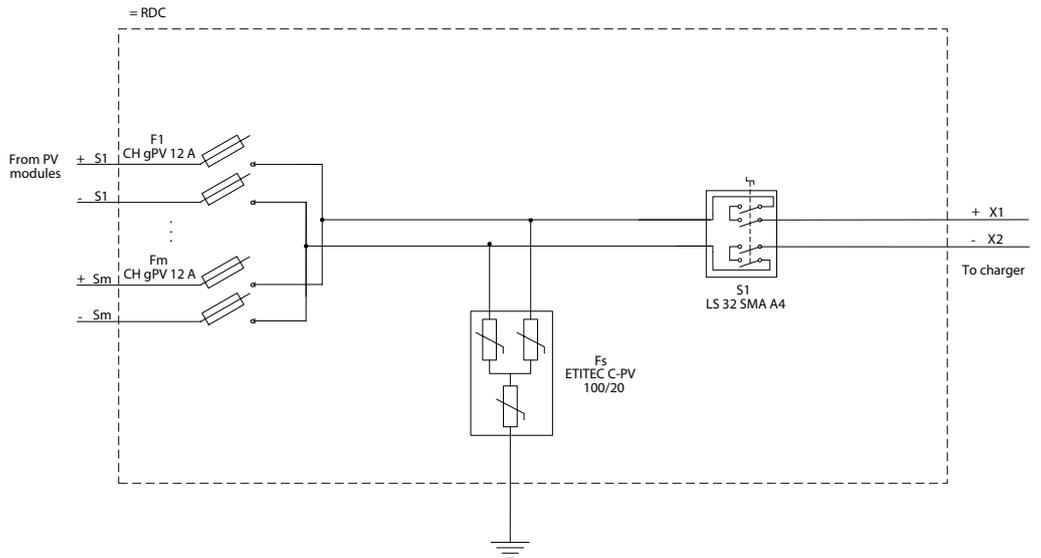


PROTECTING DC-POWERED CONSUMER LOADS DIRECTLY FROM CHARGES.




Panel type ECH-8
Fuse disconnecter type: VLC 10

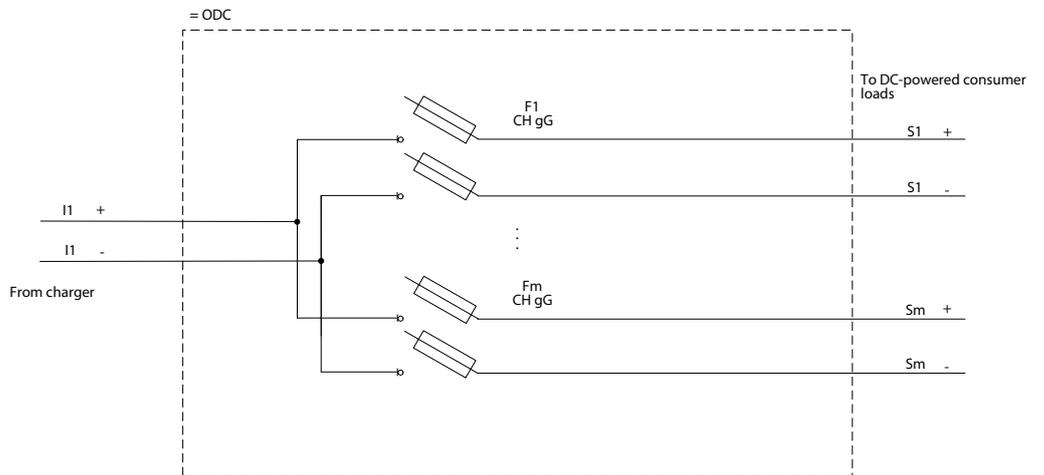


PROTECTING MAIN POWER LINES

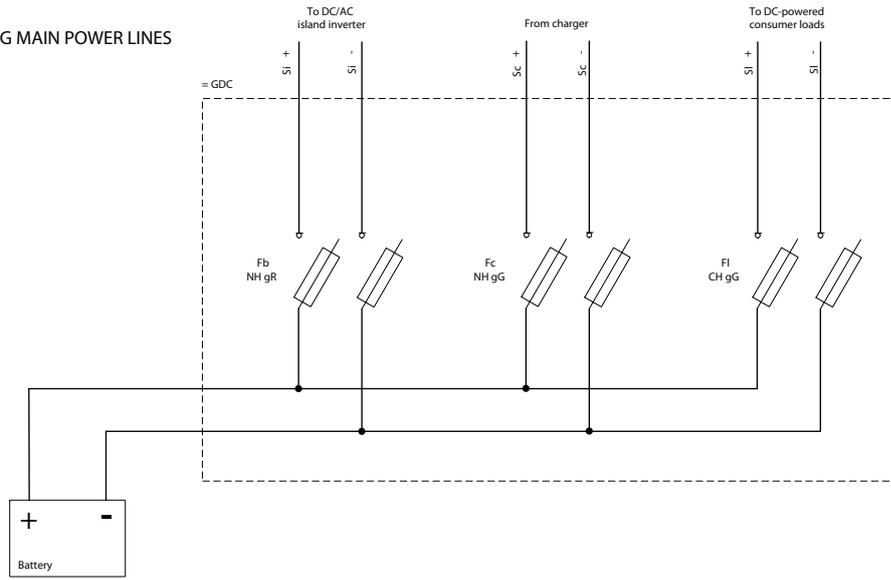

AC DISTRIBUTION BOX

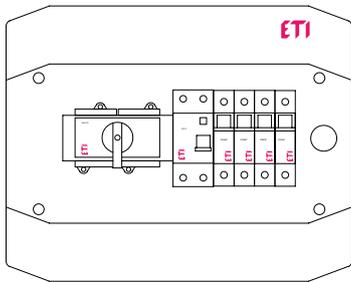

Panel type: ECH-12
 RCB: EFI 2, type A
 MCB: ETIMAT 6
 Transfer switch: LAS CO

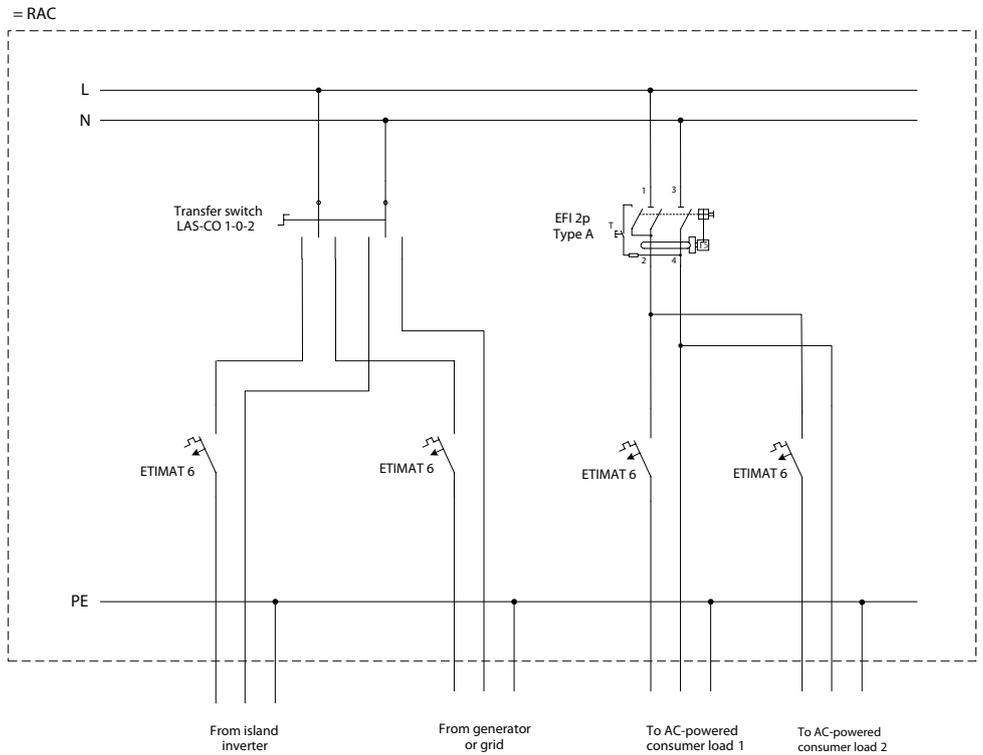

Code No	Page
001690860	139
001690861	139
001690862	139
001690863	139
001690870	131
001690871	131
001690872	131
001690873	131
001690874	131
001690890	131
001690891	131
001690892	131
001690895	131
001690896	131
001690897	131
001690900	131
001690901	131
001690902	131
001690940	132
001690941	132
001690942	132
001690943	132
001690944	132
001690945	132
001690946	132
001690947	132
001690948	132
001690949	132
001690950	132
001690951	132
001690952	132
001690953	132
001690954	132
001690955	132
001690956	132
001690957	132
001690958	132
001690959	132
001690960	132
001690964	132
001690965	132
001690966	132
001690967	132
001690968	132
001690969	132
001690970	132

Code No	Page
001690971	132
001690972	132
001690973	132
001690974	132
001690975	132
001690976	132
001690977	132
001691062	142
001692701	132
001692702	132
001692703	132
001692704	132
001692760	132
001692761	132
001692762	132
001692763	132
001692764	132
001692765	132
001692766	132
002440511	147
002440512	147
002440513	147
002440514	147
002440515	152
002440516	152
002440517	152
002440518	152
002440519	148
002440520	148
002440521	148
002440522	148
002440523	152
002440524	152
002440580	149
002440581	149
002440582	149
002440583	149
002440584	149
002440585	149
002440623	153
002440624	153
002440625	153
002440626	153
002440627	153
002440628	153
002440732	152

Code No	Page
002440733	152
002440734	152
002440735	152
002440736	152
002440737	152
002440810	155
002440811	155
002440812	155
002440813	155
002440820	157
002440821	157
002440822	157
002440823	157
002442988	159
002442989	159
002540201	28
002540203	28
002540204	28
002540211	28
002540213	28
002540948	31
002540949	31
002560201	29
002560203	29
002560205	29
002560211	29
002560213	29
002560948	31
002560949	31
002569001	31
002570201	30
002570203	30
002570211	30
002570213	30
002570948	31
002570949	31
002579001	31
002580001	34
002580006	34
002580011	34
002580016	34
002625065	9
002625067	9
002625068	9
002625069	9
002625070	9

Code No	Page
002625071	9
002625072	9
002625073	9
002625075	9
002625077	9
002625078	9
002625079	9
002625080	9
002625081	9
002625085	9
002625100	9
002625101	9
002625102	9
002625103	9
002625104	9
002625105	9
002625106	9
002625107	9
002625108	9
002625110	9
002625111	9
002625112	9
002625113	9
002625114	9
002625115	9
002625116	9
002625117	9
002625118	9
002625119	9
002625120	9
002625121	9
002625122	9
002625124	9
002625125	9
002625126	9
002625127	9
002625128	9
002625129	9
002625131	9
002625134	9
002625135	9
002625136	9
002625137	9
002625138	9
002625139	9
002625140	9

index

index

Code No	Page
002625200	12
002625209	12
002625210	12
002625211	12
002625212	12
002625213	12
002625214	12
002625215	12
002625216	12
002625217	12
002625219	12
002625241	12
002625245	12
002625274	12
002625276	12
002625277	12
002625279	12
002625280	12
002625282	12
002625285	12
002625286	12
002625500	12
002626002	19
002626004	19
002626006	19
002626008	19
002626010	19
002626012	19
002626016	19
002626020	19
002626025	19
002626030	20
002626032	20
002626034	20
002626036	20
002626038	20
002626040	20
002626042	20
002626102	19
002626104	19
002626106	19
002626108	19
002626110	19
002626112	19
002626116	19
002626120	19

Code No	Page
002626125	19
002626130	20
002626132	20
002626134	20
002626136	20
002626138	20
002626140	20
002626142	20
002626234	12
002626235	12
002626236	12
002626237	12
002626238	12
002626239	12
002626240	12
002626241	12
002626300	12
002626301	12
002626302	12
002626303	12
002626304	12
002626306	12
002626307	12
002626308	12
002626309	12
002626310	12
002626311	12
002637105	15
002637107	15
002637109	15
002637111	15
002637115	15
002637140	15
002637185	15
002637305	15
002637307	15
002637309	15
002637311	15
002637315	15
002637340	15
002637405	22
002637407	22
002637409	22
002637411	22
002637412	22
002637505	22

Code No	Page
002637507	22
002637509	22
002637511	22
002637512	22
002921101	35
002921111	35
002921121	35
002921292	35
004110075	78
004110076	78
004110077	78
004110078	78
004110079	78
004110080	78
004110081	78
004110082	78
004110083	78
004110084	78
004110085	78
004110086	78
004110087	78
004110088	78
004110089	78
004110090	78
004110091	78
004110092	78
004110093	78
004110094	78
004110095	78
004110096	78
004110209	83
004110215	83
004110216	83
004110217	83
004110218	83
004110219	83
004110232	39
004110233	39
004110234	39
004110292	39
004110293	39
004110294	39
004110295	39
004110296	39
004110297	39
004110298	39

Code No	Page
004110299	39
004110342	39
004110343	39
004110344	39
004110346	39
004110347	39
004110348	39
004110349	39
004110350	87
004110371	39
004110373	39
004110374	39
004110375	39
004110376	39
004110377	39
004110378	39
004110379	39
004110381	39
004110383	39
004110384	39
004110385	39
004110386	39
004110387	39
004110388	39
004110389	39
004110391	44
004110392	44
004110393	44
004110394	44
004110395	44
004110396	44
004110397	44
004110398	44
004110399	44
004110400	44
004110401	44
004110449	44
004110455	39
004110456	39
004110457	39
004110458	39
004110459	39
004110460	39
004110472	44
004110473	44
004110474	44

Code No	Page
004110475	44
004110476	44
004110477	44
004110478	44
004110479	44
004110480	44
004110481	44
004110482	44
004110484	44
004110485	44
004110486	44
004110487	44
004110488	44
004110489	44
004110490	44
004110491	44
004110492	44
004110493	44
004110494	44
004110495	44
004110496	44
004110497	44
004110498	44
004110560	49
004110561	49
004110562	49
004110563	49
004110564	49
004110565	49
004110566	49
004110567	49
004110591	49
004110592	49
004110593	49
004110594	49
004110595	49
004110596	49
004110597	49
004110598	49
004110606	49
004110607	49
004110608	49
004110609	49
004110610	49
004110611	49
004110612	49

Code No	Page
004110613	49
004110621	49
004110622	49
004110623	49
004110627	44
004110628	44
004110629	44
004110630	49
004110631	49
004110632	49
004110633	49
004110634	49
004110635	49
004110636	49
004110637	49
004110638	49
004110639	49
004110640	49
004110641	49
004110642	49
004110643	49
004110644	49
004110647	49
004110648	49
004110649	49
004110650	98
004110651	98
004110652	98
004110653	98
004110654	98
004110655	98
004110656	98
004110657	98
004110658	98
004110659	98
004110660	98
004110661	98
004110662	98
004110663	98
004110664	98
004110665	98
004110666	98
004110667	98
004110668	98
004110669	98
004110670	98

Code No	Page
004110671	98
004110672	98
004110673	98
004110674	98
004110675	98
004110676	98
004110677	98
004110678	98
004110679	98
004110680	98
004110681	98
004110682	98
004110683	98
004110684	98
004110685	98
004110686	98
004110687	98
004110688	98
004110689	98
004110690	98
004110691	98
004110692	47
004110693	47
004110694	47
004110695	47
004110696	47
004110697	47
004110698	98
004110699	98
004110700	98
004110701	98
004110702	98
004110703	98
004110714	51
004110715	51
004110716	51
004110717	51
004110718	51
004110719	51
004110720	51
004110721	51
004110722	51
004110723	51
004110724	51
004110725	51
004110726	51

Code No	Page
004110727	51
004110728	51
004110729	50
004110730	50
004110731	50
004110732	50
004110733	50
004110734	50
004110735	50
004110736	50
004110737	50
004110738	50
004110743	47
004110744	47
004110745	47
004110746	47
004110747	47
004110748	47
004110749	47
004110750	47
004110751	47
004110752	47
004110753	47
004110754	47
004110755	93
004110756	93
004110757	93
004110758	93
004110759	93
004110760	93
004110761	93
004110762	93
004110763	93
004110764	93
004110765	93
004110766	93
004110767	93
004110768	93
004110769	93
004110770	93
004110771	93
004110772	93
004110773	93
004110774	93
004110775	93
004110776	93

index

index

Code No	Page						
004110777	93	004110864	108	004122044	112	004184532	59
004110778	93	004110865	108	004122060	117	004184533	59
004110779	98	004110866	108	004122061	117	004184534	59
004110780	98	004110867	108	004122062	117	004184535	59
004110781	98	004110868	108	004122063	117	004184536	59
004110782	98	004110869	108	004122064	117	004184545	59
004110783	98	004110880	108	004122065	117	004184546	59
004110784	98	004110881	108	004132017	115	004184548	59
004110785	98	004110890	108	004132019	115	004184549	59
004110786	98	004110891	108	004132023	115	004660060	162
004110787	98	004110950	93	004132029	115	004660061	162
004110788	98	004110951	93	004184463	59	004660062	162
004110789	98	004110952	93	004184482	59	004660063	162
004110790	98	004110953	93	004184483	59	004660064	162
004110791	98	004110954	93	004184484	59	004660065	162
004110792	98	004110955	93	004184485	59	004660066	162
004110793	98	004110956	93	004184486	59	004660067	162
004110800	106	004110957	93	004184487	59	004661481	171
004110801	106	004110960	93	004184488	59	004661483	171
004110802	106	004110961	93	004184489	59	004661486	171
004110803	106	004110962	93	004184490	59	004661490	171
004110804	106	004110963	93	004184500	68	004661493	171
004110805	106	004110964	93	004184501	68	004661496	171
004110809	106	004110965	93	004184502	68	004661499	171
004110810	106	004110966	93	004184503	68	004661501	171
004110811	106	004110967	93	004184504	68	004661502	171
004110812	106	004110970	93	004184505	68	004661853	166
004110813	106	004110971	93	004184506	68	004661854	166
004110814	106	004110972	93	004184507	68	004661855	166
004110815	106	004110973	93	004184508	68	004661861	171
004110816	106	004110974	93	004184509	68	004661864	171
004110817	106	004110975	93	004184512	59	004661865	171
004110840	108	004110976	93	004184513	59	004661923	169
004110841	108	004110977	93	004184514	59	004661924	169
004110842	108	004122023	112	004184515	59	004661992	167
004110843	108	004122024	112	004184516	59	004661993	167
004110844	108	004122025	112	004184518	59	004723103	81
004110845	108	004122033	112	004184519	59	004723104	81
004110846	108	004122035	119	004184520	59	004723105	81
004110847	108	004122036	123	004184521	59	004723106	81
004110848	108	004122037	123	004184524	59	004723107	81
004110849	108	004122038	122	004184525	59	004723108	81
004110860	108	004122039	125	004184526	59	004723109	81
004110861	108	004122040	125	004184528	59	004723110	81
004110862	108	004122041	125	004184529	59	004723111	81
004110863	108	004122042	125	004184531	59	004723112	81

Code No	Page
004723234	68
004723235	68
004723236	68
004723237	68
004723259	85
004723260	85
004723261	85
004723262	85
004723263	85
004723264	85
004723265	85
004723266	85
004723267	85
004723268	85
004723269	85
004723270	85
004723271	85
004723272	85
004723273	85
004723274	85
004723275	85
004723276	85
004723277	85
004723278	85
004723279	85
004723280	85
004723281	85
004723282	85
004723283	85
004723284	85
004723285	85
004723286	85
004723287	85
004723288	85
004723289	86
004723290	86
004723291	86
004723292	86
004723293	86
004723294	86
004723295	86
004723296	86
004723297	86
004723298	86
004723299	86
004723300	86

Code No	Page
004723301	86
004723302	86
004723303	86
004723304	86
004723305	86
004723306	86
004723307	86
004723308	86
004723309	86
004723310	86
004723311	86
004723312	86
004723313	86
004723314	86
004723315	86
004723316	86
004723317	86
004723318	86
004723320	87
004723321	87
004723322	87
004723323	87
004723324	87
004723325	87
004723326	87
004723327	87
004723330	87
004723331	87
004723332	87
004723333	87
004723334	87
004723335	87
004723336	87
004723337	87
004723340	87
004723341	87
004723342	87
004723343	87
004723344	87
004723345	87
004723346	87
004723347	87
004724234	68
004724235	68
004724260	85
004724261	85

Code No	Page
004724262	85
004724263	85
004724264	85
004724265	85
004724266	85
004724267	85
004724270	85
004724271	85
004724272	85
004724273	85
004724274	85
004724275	85
004724276	85
004724277	85
004724280	85
004724281	85
004724282	85
004724283	85
004724284	85
004724285	85
004724286	85
004724287	85
004724290	86
004724291	86
004724292	86
004724293	86
004724294	86
004724295	86
004724296	86
004724297	86
004724300	86
004724301	86
004724302	86
004724303	86
004724304	86
004724305	86
004724306	86
004724307	86
004724310	86
004724311	86
004724312	86
004724313	86
004724314	86
004724315	86
004724316	86
004724317	86

Code No	Page
004724320	87
004724321	87
004724322	87
004724323	87
004724324	87
004724325	87
004724326	87
004724327	87
004724330	87
004724331	87
004724332	87
004724333	87
004724334	87
004724335	87
004724336	87
004724337	87
004724340	87
004724341	87
004724342	87
004724343	87
004724344	87
004724345	87
004724346	87
004724347	87
004725232	68
004725233	68
004725234	68
004725235	68
004725260	85
004725261	85
004725262	85
004725263	85
004725264	85
004725265	85
004725266	85
004725270	85
004725271	85
004725272	85
004725273	85
004725274	85
004725275	85
004725276	85
004725280	85
004725281	85
004725282	85
004725283	85

index

index

Code No	Page
004725284	85
004725285	85
004725286	85
004725290	86
004725291	86
004725292	86
004725293	86
004725294	86
004725295	86
004725296	86
004725297	86
004725298	86
004725299	86
004725300	86
004725301	86
004725302	86
004725303	86
004725304	86
004725305	86
004725306	86
004725307	86
004725308	86
004725309	86
004725310	86
006710335	36
006710340	36
006710341	36