

Sensor-switched outdoor light

L 585 S

white

EAN 4007841 005917

Article number 005917



Max. 60 W



3 years

max. 60 W E27

infrared sensor 180°

max. 10 m

IP44

70° vertical

2 - 2000 lux

8 sec - 35 min

ideal 2 m

energy saving

manufacturer's warranty [steinel.de/garantie](https://www.steinel.de/garantie)

Function description

Individualist all round. Outdoor SensorLight L 585 S, ideal for building fronts and entrances, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 70° for exact adjustment of the detection zone.

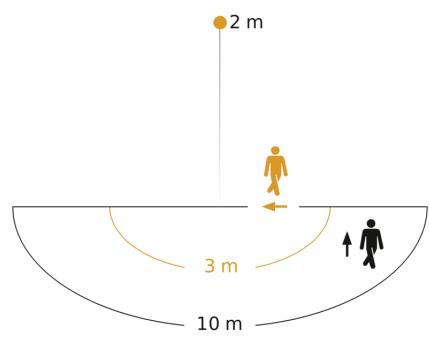
Technical specifications

Dimensions (L x W x H)	229 x 215 x 312 mm
With lamp	No
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Version	white
PU1, EAN	4007841005917
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Package content	1
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	Plastic

Mounting height max.	3,00 m
Slave mode selectable	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (14 m ²)
Reach, tangential	r = 10 m (157 m ²)
Photo-cell controller	Yes
Cover material	sticker
Lamp	All-purpose lamp
Base	E27
Soft light start	No
Twilight setting	2 - 2000 lx
Time setting	8 s - 35 Min.
Basic light level function	No
Interconnection	No

Technical specifications

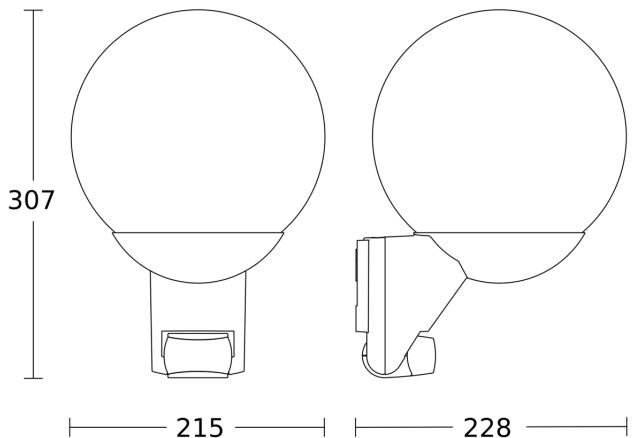
Cover material	Glass transparent	Optimum mounting height	2 m
Mains power supply	230 – 240 V / 50 Hz	Detection angle	180 °
Output	60 W	Product category	Sensor-switched outdoor light
Power consumption	0,55 W		

Detection Zone

Possible mounting height: 1,80 m – 3,00 m

Orange: radial

Black: tangential

Dimension Drawing**Circuit diagram**