


## IS 2360 DE ECO 8m

white

EAN 4007841 034733

Article number 034733



infrared sensor 360°



max. 4 m

1000 W



IP54



2 - 2000 lux



8 sec - 35 min



energy saving

5 years  
manufacturer's  
warranty steinel.de/  
garantie

CE

## Function description

Intelligent technology for installation. Infrared wall sensor IS 2360 DE ECO, for indoors and out, ideal for installing in projecting roofs and suspended ceilings, 360° angle of coverage, reach can be set up to 8 m in diameter, selectable time and twilight threshold, detection zone can be customised with shrouds.

## Technical specifications

Dimensions (Ø x H)	78 x 89 mm	LED lamps > 8 W	350 W
With motion detector	Yes	Capacitive load in $\mu$ F	132 $\mu$ F
Manufacturer's Warranty	5 years	Technology, sensors	passive infrared, Light sensor
Settings via	Potentiometers	Mounting height	2,2 – 4 m
With remote control	No	Mounting height max.	4,00 m
Version	white	Optimum mounting height	2,5 m
PU1, EAN	4007841034733	Detection angle	360 °
Type	Motion detectors	Angle of aperture	180 °
Application, place	Outdoors, Indoors	Sneak-by guard	Yes
Application, room	corridor / aisle, changing room, function room / ancillary room, kitchenette, stairwell, WC / washroom, outdoors, front door, all round the building, terrace / balcony, Indoors	Capability of masking out individual segments	Yes
Colour	white	Electronic scalability	No
Colour, RAL	9010	Mechanical scalability	No
Includes corner wall mount	No	Reach, radial	Ø 4 m (13 m <sup>2</sup> )
Installation site	ceiling	Reach, tangential	Ø 8 m (50 m <sup>2</sup> )
		Switching zones	304 switching zones
		Cover material	shrouds

**IS 2360 DE ECO 8m**

white

EAN 4007841 034733

Article number 034733

**Technical specifications**

Installation	In-ceiling installation, Ceiling	Twilight setting	2 – 2000 lx
IP-rating	IP54	Time setting	8 s – 35 Min.
Protection class	II	Basic light level function	No
Ambient temperature	from -20 up to 40 °C	Main light adjustable	No
Material	Plastic	Twilight setting TEACH	No
Mains power supply	220 – 240 V / 50 – 60 Hz	Constant-lighting control	No
Fluorescent lamps, electronic ballast	350 W	Interconnection	Yes
Fluorescent lamps, uncorrected	500 VA	Type of interconnection	Master/master
Fluorescent lamps, series-corrected	500 VA	Interconnection via	Cable
Fluorescent lamps, parallel-corrected	500 VA	Product category	Motion detector
Switching output 1, low-voltage halogen lamps	1000 VA		
LED lamps < 2 W	100 W		
LED lamps > 2 W < 8 W	175 W		

Motion detector - Professional Line

# IS 2360 DE ECO 8m


white

EAN 4007841 034733


Article number 034733



## Detection Zone

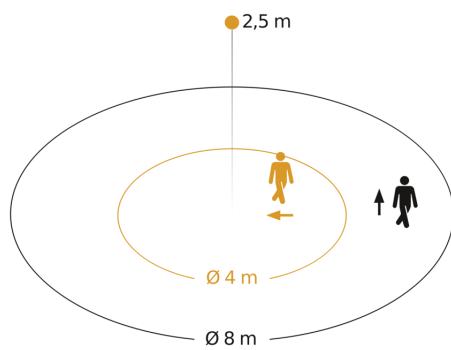

## Dimension Drawing

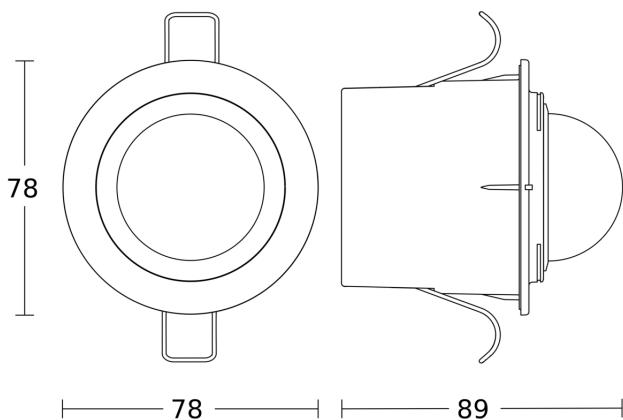

Possible mounting height: 2,20 m - 4,00 m

Orange: radial

Black: tangential

## Circuit diagram

