

LED indoor light without sensor - Professional Line

# RS PRO P2 flat

Neutral white

EAN 4007841 069759

Article number 069759



LED

30 years (Ø 4,5h / day)



indoor



connectable with  
master



IP54



energy saving



CE

5 years

manufacturer's  
warranty steinel.de/  
garantie



Light source not  
exchangeable



Control gear not  
exchangeable

## Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P2 flat integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the sensor version by cable. Output: 14,1 W with 1684 lm, 4000 K.

## Technical specifications

Dimensions (Ø x H)	322 x 68 mm	Base	without
With lamp	Yes, STEINEL LED system	LED cooling system	Passive Thermo Control
With motion detector	No	Soft light start	Yes
Manufacturer's Warranty	5 years	Main light adjustable	No
Version	Neutral white	Interconnection via	Cable
PU1, EAN	4007841069759	Lifetime LED according to IEC-62717 (L70)	100.000 h
Colour	white	Lifetime LED according to IEC-62717 (L80)	73.000 h
Installation site	wall, ceiling	LED service life according to IES TM-21 (L70)	>60.000 h
Installation	Ceiling	Lifetime LED according to IES TM-21 (L80)	>60.000 h
Impact resistance	IK03	Fuse protection B10	54
IP-rating	IP54	Fuse protection B16	87
Protection class	II	Fuse protection C10	90
Ambient temperature	from -10 up to 40 °C	Fuse protection C16	145
Housing material	Plastic	Output	14,1 W
Cover material	Plastic, opal		
Mains power supply	220 – 240 V / 50 – 60 Hz		
Luminous flux total product	1684 lm		

<https://www.steinel.de>

Subject to technical modifications

01.2026 Page 1 from 2

# RS PRO P2 flat

Neutral white  
EAN 4007841 069759  
Article number 069759




### Technical specifications


Total product efficiency	119 lm/W
Colour temperature	4000 K
Lamp	LED cannot be replaced

Colour Rendering Index CRI	= 82
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	13 A
IP-rating, ceiling	IP54
Product category	LED indoor light without sensor


### Dimension Drawing

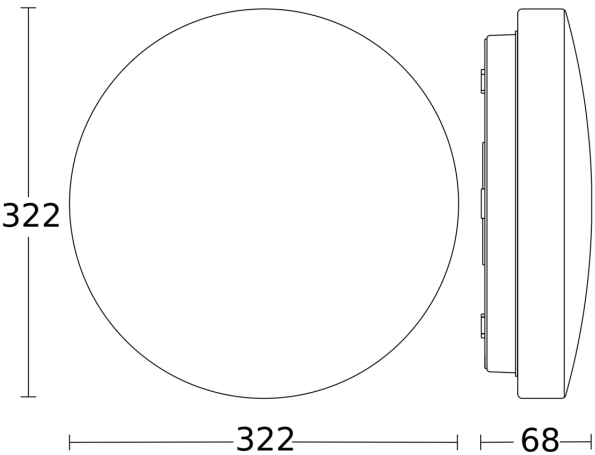

### Master circuit diagram



### Master/slave interconnection circuit diagram

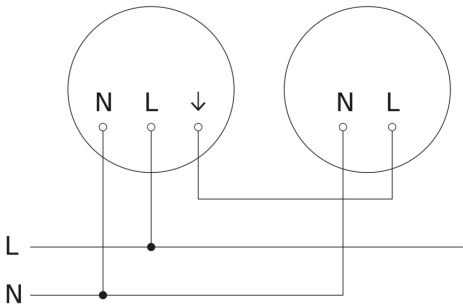

### Master/slave interconnection circuit diagram

