

Product datasheet

Specifications



Monolithic tower lights, Easy Harmony XVG, 60mm, red green, steady light, base mounting, IP53, 220...240V AC

XVGM2W

Main

Range of product	Easy Harmony XVG
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	2 illuminated units
Material	PC (UL94 V-2): globe
Mounting diameter	60 mm
Component name	XVG
Device mounting	Base mounting
Light source	LED steady
Light block color	Red/green
Indicator bank base type	Base without buzzer

Complementary

[Us] rated supply voltage	220...240 V AC
Cable cross section	0.33 mm ²
Discrete output type	PNP
[Uimp] rated impulse withstand voltage	4.0 kV
Current consumption	36 mA
Power consumption in VA	5.8 VA
Product weight	0.25 kg

Environment

Product certifications	CE CCC EAC
Ambient air temperature for storage	-20...65 °C
Ambient air temperature for operation	0...50 °C
Electrical shock protection class	Class II
Overvoltage category	III conforming to IEC 60947-5-1
IP degree of protection	IP53

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	8.0 cm
Package 1 Width	8.0 cm
Package 1 Length	31.0 cm
Package 1 Weight	377.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	21
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	8.561 kg
Unit Type of Package 3	P06
Number of Units in Package 3	84
Package 3 Height	75.0 cm
Package 3 Width	80.0 cm
Package 3 Length	60.0 cm
Package 3 Weight	42.244 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold

Use Longer




Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

End of life manual availability	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Dimensions Drawings

Dimensions

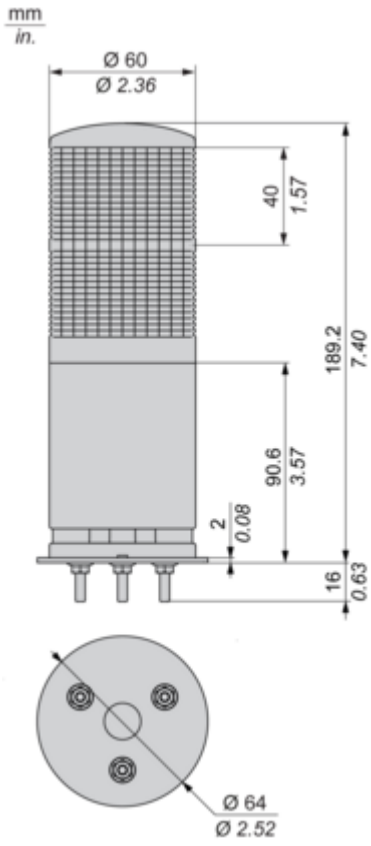


Mounting and Clearance

Mounting

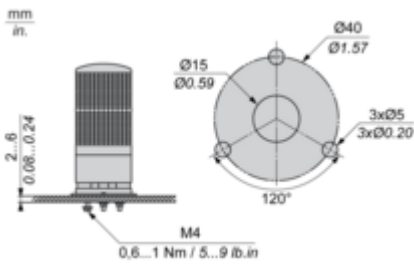

Connections and Schema

Wiring

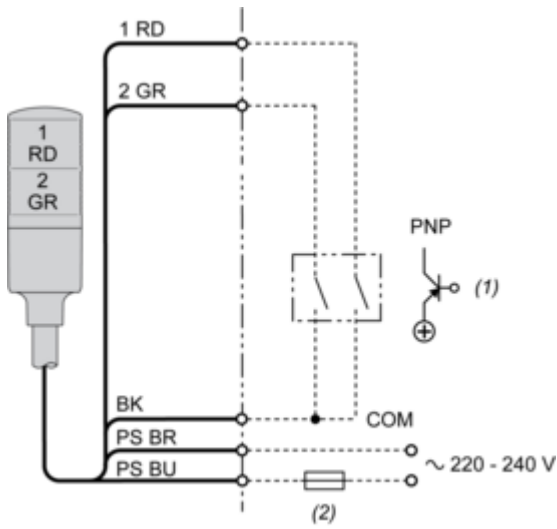

(1) "ON" for lighting and/or applying continuous sound.

(2) Fuse (rated current: 1 A)

RD : Red

GR : Green


BK : Black

PS BR : Power Supply Brown

PS BL : Power Supply Blue


Technical Illustration

Dimensions

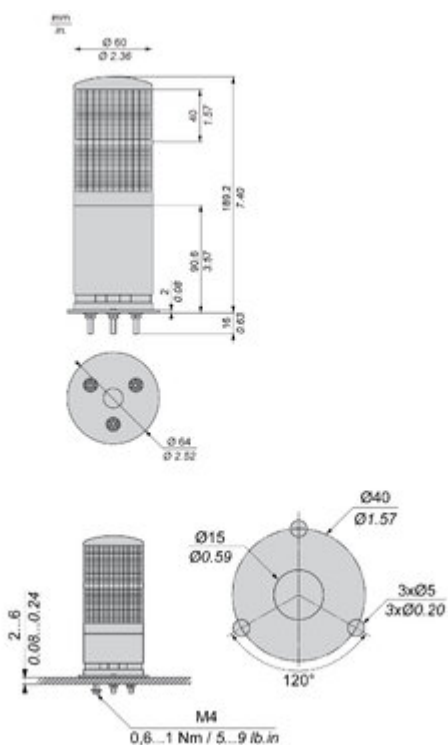

Technical Illustration

Wiring diagram

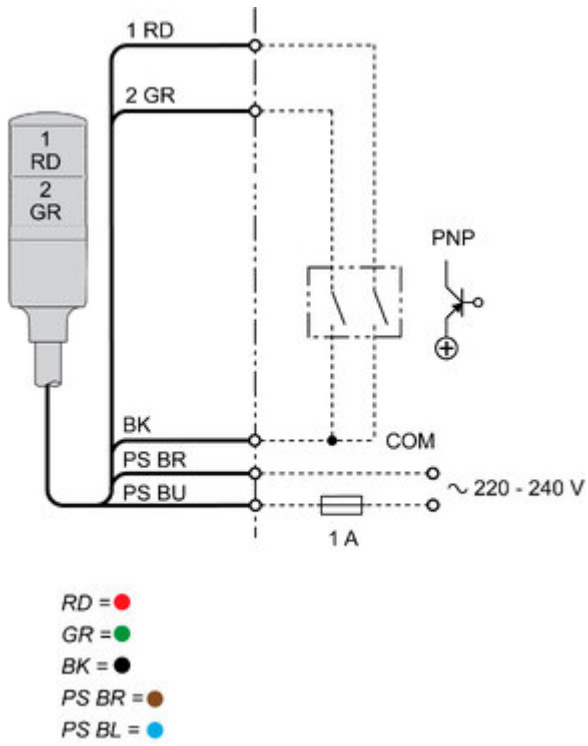


Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Easy Harmony XVG

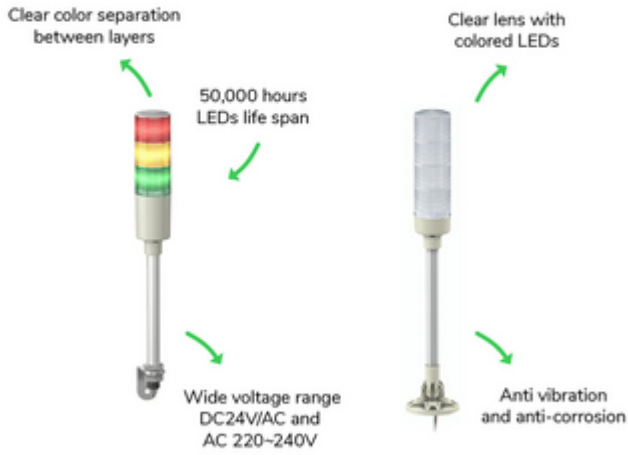

Offer Marketing Illustration

Product benefits / Features

Features
Easy Harmony XVG

- Pre-assembled & Pre-wired with color code
- Integrated 85dB buzzer
- Long distance machine status by clear lens design
- Wide mounting options for all kind of applications
- Less maintenance thanks to LEDs

Image of product / Alternate images

Alternative

