

# Product datasheet

Specifications



Monolithic tower lights, Easy Harmony XVG, 60mm, red orange green, steady light, base mounting, IP53, 220...240V AC

XVGM3W

## Main

Range of product	Easy Harmony XVG
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Material	PC (UL94 V-2): globe
Mounting diameter	60 mm
Component name	XVG
Device mounting	Base mounting
Light source	LED steady
Light block color	Red/orange/green
Indicator bank base type	Base without buzzer

## Complementary

[Us] rated supply voltage	220...240 V AC
Cable cross section	0.33 mm <sup>2</sup>
Discrete output type	PNP
[Uimp] rated impulse withstand voltage	4.0 kV
Current consumption	50 mA
Power consumption in VA	5.8 VA
Product weight	0.29 kg

## Environment

Product certifications	CE
Ambient air temperature for storage	-20...65 °C
Ambient air temperature for operation	0...50 °C
Electrical shock protection class	Class II
Overvoltage category	III conforming to IEC 60947-5-1
IP degree of protection	IP53

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.8 cm

Package 1 Width	8.0 cm
Package 1 Length	31.0 cm
Package 1 Weight	416.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	21
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	9.376 kg
Unit Type of Package 3	P06
Number of Units in Package 3	84
Package 3 Height	75.0 cm
Package 3 Width	80.0 cm
Package 3 Length	60.0 cm
Package 3 Weight	45.504 kg

## Contractual warranty

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better



#### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	<a href="#">Compliant By Exemption</a>
REACH Regulation	<a href="#">Reference contains Substances of Very High Concern above the threshold</a>

### Use Longer




#### Lifetime extension

Repair	No
--------	----

### Use Again




#### Repack and remanufacture

End of life manual availability	<a href="#">End of Life Information</a>
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings


Dimensions

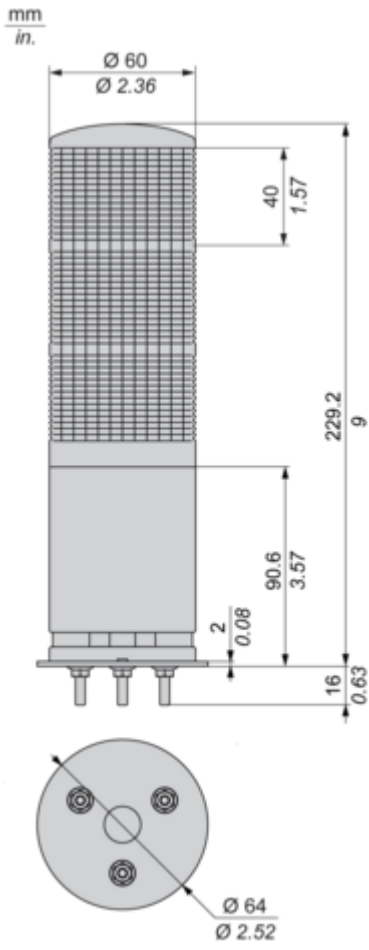

Mounting and Clearance


Mounting

---

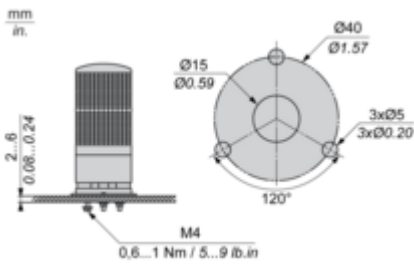

Connections and Schema

Wiring

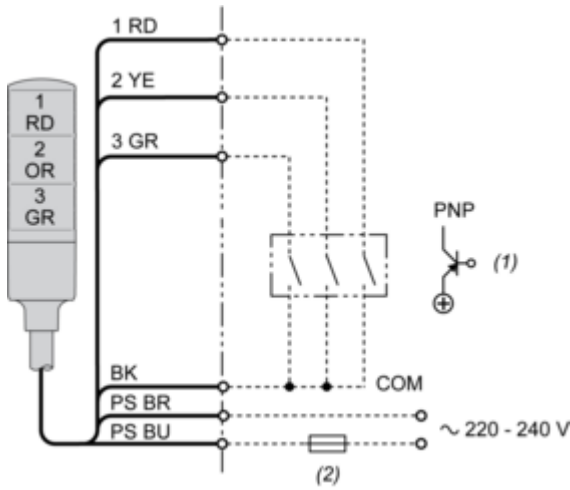

(1) "ON" for lighting and/or applying continuous sound.

(2) Fuse (rated current: 1 A)

RD : Red

YE : Yellow

GR : Green

OR : Orange

BK : Black


PS BR : Power Supply Brown

PS BL : Power Supply Blue

Technical Illustration


Dimensions

---

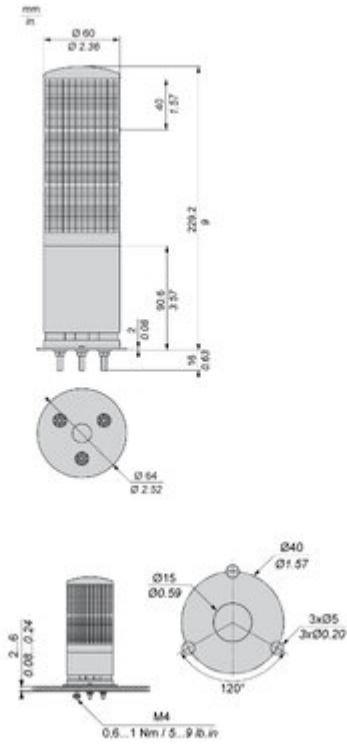

Technical Illustration

Wiring diagram

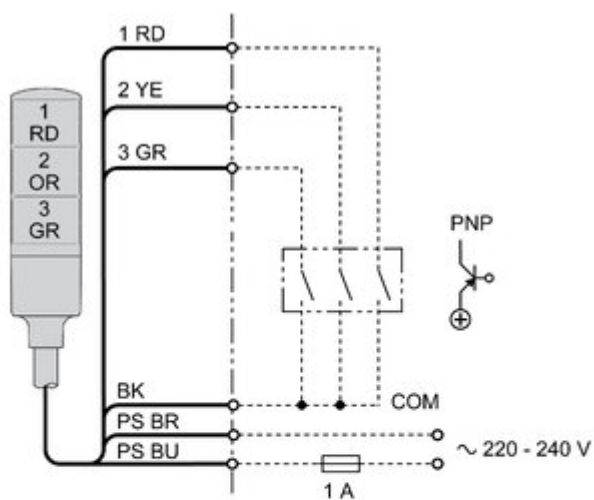

- RD = ●
- YE = ●
- GR = ●
- OR = ●
- BK = ●
- PS BR = ●
- PS BL = ●


Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Easy Harmony XVG

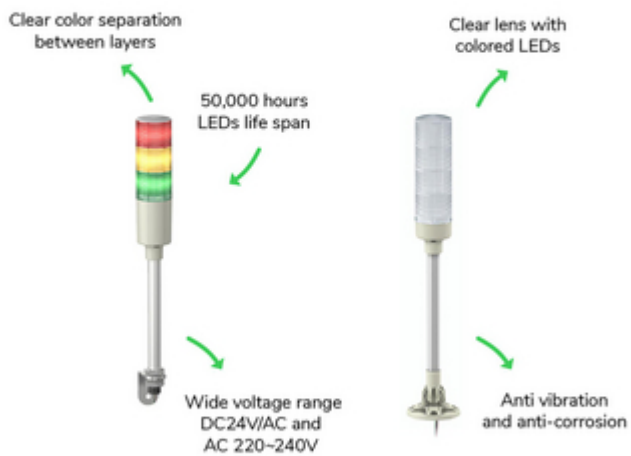

Offer Marketing Illustration

Product benefits / Features

---



The infographic features a central image of a vertical signal lamp with four colored lenses (red, yellow, green, blue) and a grey base. It is surrounded by five circular icons, each with a corresponding feature description. The background is a solid green color.

### Features

Easy Harmony XVG

- Pre-assembled & Pre-wired with color code** (Icon: Plug with color-coded wires)
- Integrated 85dB buzzer** (Icon: Speaker)
- Long distance machine status by clear lens design** (Icon: Eye)
- Wide mounting options for all kind of applications** (Icon: Gear)
- Less maintenance thanks to LEDs** (Icon: Wrench and screwdriver)

Image of product / Alternate images

Alternative

---



