

## Han E 06 Pos. M Insert Screw

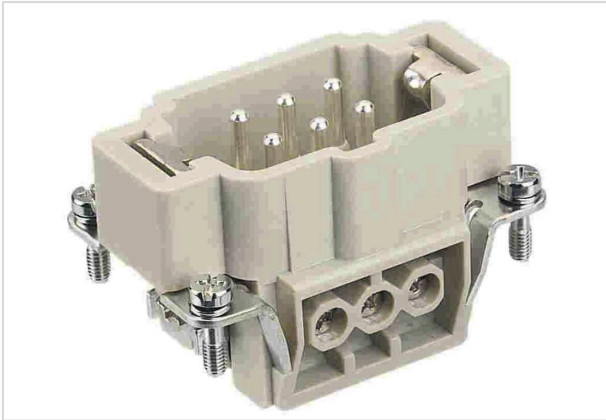


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 33 006 2601  |
| Specification      | Han E 06 Pos. M Insert Screw  |
| HARTING eCatalogue | <a href="https://harting.com/09330062601">https://harting.com/09330062601</a> |

### Identification

|          |                    |
|----------|--------------------|
| Category | Inserts            |
| Series   | Han E <sup>®</sup> |

### Version

|                      |                   |
|----------------------|-------------------|
| Termination method   | Screw termination |
| Gender               | Male              |
| Size                 | 6 B               |
| With wire protection | Yes               |
| Number of contacts   | 6                 |
| PE contact           | Yes               |

### Technical characteristics

|                               |                              |
|-------------------------------|------------------------------|
| Conductor cross-section       | 0.75 ... 2.5 mm <sup>2</sup> |
| Conductor cross-section [AWG] | AWG 18 ... AWG 14            |
| Rated current                 | 16 A                         |
| Rated voltage                 | 500 V                        |
| Rated impulse voltage         | 6 kV                         |
| Pollution degree              | 3                            |
| Rated voltage acc. to UL      | 600 V                        |
| Rated voltage acc. to CSA     | 600 V                        |
| Insulation resistance         | >10 <sup>10</sup> Ω          |
| Contact resistance            | ≤1 mΩ                        |
| Stripping length              | 7.5 mm                       |



Pushing Performance  
Since 1945

## Technical characteristics

|                          |                         |
|--------------------------|-------------------------|
| Tightening torque        | 0.5 Nm Contact screw M3 |
|                          | 0.5 Nm Fixing screws M3 |
|                          | 1.2 Nm PE screw M4      |
| Recommended screw driver | Slotted 0.6 x 3.5       |
|                          | Slotted 0.8 x 4.5       |
|                          | PH1                     |
|                          | PH2                     |
| Limiting temperature     | -40 ... +125 °C         |
| Mating cycles            | ≥500                    |

## Material properties

|   |  |
|---|--|
| Material (insert)                         | Polycarbonate (PC)                                     |
| Colour (insert)                           | RAL 7032 (pebble grey)                                 |
| Material (contacts)                       | Copper alloy   |
| Surface (contacts)                        | Silver plated  |
| Material flammability class acc. to UL 94 | V-0  |
| RoHS                                      | compliant with exemption                               |
| RoHS exemptions                           | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status                                | compliant with exemption                               |
| China RoHS                                | 50   |
| REACH Annex XVII substances               | Not contained  |
| REACH ANNEX XIV substances                | Not contained  |
| REACH SVHC substances                     | Yes  |
| REACH SVHC substances                     | Lead   |
| ECHA SCIP number                          | 5dbb3851-b94e-4e88-97a1-571845975242                   |
| California Proposition 65 substances      | Yes  |
| California Proposition 65 substances      | Lead<br>Nickel   |
| Fire protection on railway vehicles       | EN 45545-2 (2020-08) + A1 (2023-10)                    |
| Requirement set with Hazard Levels        | R22 (HL 1-3)<br>R23 (HL 1-3)                           |

## Specifications and approvals

|                |             |
|----------------|-------------|
| Specifications | IEC 60664-1 |
|                | IEC 61984   |



**Pushing Performance**  
Since 1945

## Specifications and approvals

|           |                                   |
|-----------|-----------------------------------|
| UL / CSA  | UL 1977 ECBT2.E235076             |
|           | UL 2237 PVVA2.E318390             |
|           | CSA-C22.2 No. 182.3 PVVA8.E318390 |
| Approvals | DNV GL                            |

## Commercial data

|                                |   |
|--------------------------------|---|
| Packaging size                 | 1   |
| Net weight                     | 0.5 g   |
| Country of origin              | Germany   |
| European customs tariff number | 85366990  |
| GTIN                           | 5713140050723                                     |
| eCl@ss                         | 27440205 Contact insert for industrial connectors |
| ETIM                           | EC000438  |
| UNSPSC 24.0                    | 39121522  |