

socket, for RSB1A160 RSB2A080 relays, Harmony Electromechanical Relays, 10A, screw connec to rs, separate contact

RSZE1S48M

# Main

Range of product	Harmony Electromechanical Relays	
Device short name	RSZ	
Product or component type	Socket	
Product compatibility	Plug-in relay RSB with 1 C/O contact at 16 A Plug-in relay RSB with 2 C/O contact at 8 A	
Contacts type and composition	2 C/O	
[Ith] conventional free air thermal current	10 A	

# Complementary

Shape of pin	Flat	
[Ue] rated operational voltage	< 250 V AC	
Contact terminal arrangement	Separate	
Connections - terminals	Screw connectors, 1 x 0.251 x 2.5 mm² (AWG 22AWG 14) flexible with cable end Screw connectors, 2 x 0.252 x 1 mm² (AWG 22AWG 17) flexible with cable end Screw connectors, 1 x 0.51 x 2.5 mm² (AWG 20AWG 14) solid without cable end Screw connectors, 2 x 0.52 x 1.5 mm² (AWG 20AWG 16) solid without cable end	
Tightening torque	< 0.8 N.m for M3 screw(s)	
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)	
[Uimp] rated impulse withstand voltage	3.6 kV	
Overvoltage category	III	
Pollution degree	3	
Sale per indivisible quantity	10	
Width	15.5 mm	
Net weight	0.05 kg	

# **Environment**

IP degree of protection	IP20 conforming to IEC 60529	
Standards	IEC 61984	
Product certifications	CSA UL	
Marking	CE	
Ambient air temperature for storage	-4085 °C	
Ambient air temperature for operation	-2585 °C	

# **Packing Units**

_	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.700 cm
Package 1 Width	6.200 cm
Package 1 Length	8.000 cm
Package 1 Weight	39.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	7.000 cm
Package 2 Width	9.000 cm
Package 2 Length	17.000 cm
Package 2 Weight	428.000 g
Unit Type of Package 3	S03
Number of Units in Package 3	240
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	10.575 kg

# **Contractual warranty**

Warranty (in months)

40



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Total lifecycle Carbon footprint	1
Environmental Disclosure	Product Environmental Profile

#### **Use Better**


Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration

#### **Use Again**

○ Repack and remanufacture	
End of life manual availability	No need of specific recycling operations
Take-back	No

# **Dimensions Drawings**

# **Dimensions**

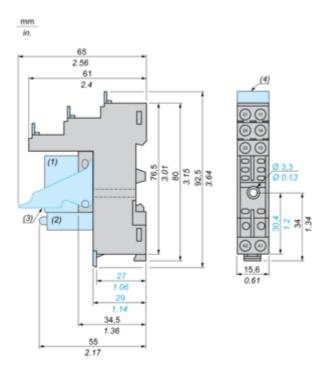


- (1) Relays
  (2) Protection module
- (3) Maintaining clamp
- (4) Legend

Connections and Schema

# Wiring Diagram





(1) Terminals 11 and 21,14 and 24,12 and 22 must be linked for this references

**NOTE:** For DC input, A1 have to be +, otherwise it would short circuit from protection module

# **Technical Illustration**

#### **Dimensions**

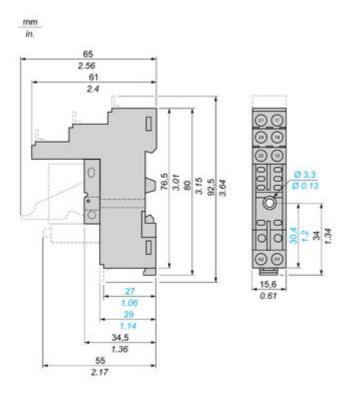


Image of product / Alternate images

# **Alternative**



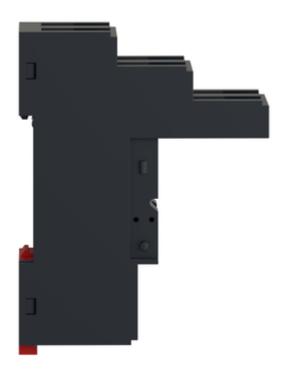










Image of product in real life situation

