

# Intermediate switch, Sedna Design & Elements, 10AX, PRO, white

SDD111107

### Main

Range	Sedna	
Product or component type	Switch	
Device presentation	Mechanism with fixing frame	
Device application	Control switch	
Number of rocker	1	
Switch function	Intermediate	
Rated current	10 AX	
[Ue] rated operational voltage	250 V	
Network type	AC	
Network frequency	50 Hz	
Colour tint	White (RAL 9003)	

# Complementary

Technology type	Electromechanical	
Device mounting	Flush	
Fixing mode	Claws, span of claws working range: 4660 mm Screws, span of claws working range:	
Actuator	Rocker	
Load type	1 lamp integrated ballast (100 W)	
Power range	2300 W	
Surface finish	Glossy	
surface treatment	Untreated	
Material	Thermoplastic ABS-UV stabilised	
kind of terminals	Screwless terminals	
Cable cross section	1.52.5 mm²	
wire structure	Rigid Stranded Flexible	
Wire stripping length	13 mm	
IK degree of protection	IK02	
Height	73 mm	
Width	73 mm	
Depth	37 mm	

depth of visual part	24 mm
Net weight	0.063 kg
Targeted channel	Professional

# **Environment**

IP degree of protection	IP20
conformity mark	CE
Product certifications	EAC
Standards	IEC 60669-1

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.000 cm
Package 1 Width	8.000 cm
Package 1 Length	8.000 cm
Package 1 Weight	67.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	9.500 cm
Package 2 Width	18.500 cm
Package 2 Length	27.500 cm
Package 2 Weight	755.000 g
Unit Type of Package 3	S04
Number of Units in Package 3	120
Package 3 Height	30.000 cm
Package 3 Width	40.000 cm
Package 3 Length	60.000 cm
Package 3 Weight	9.607 kg

# **Contractual warranty**

Warranty (in months) 18



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Total lifecycle Carbon footprint	1
Environmental Disclosure	Product Environmental Profile

#### **Use Better**


Average percentage of recycled plastic content	63 %
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant
SCIP Number	D3c840d2-b54e-4e8b-a465-c39880495453
REACh Regulation	REACh Declaration

#### **Use Again**

○ Repack and remanufacture	
End of life manual availability	No need of specific recycling operations
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

#### **Technical Illustration**

## Wiring diagram

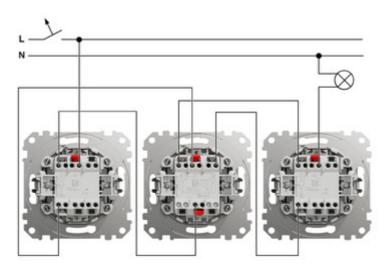

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- The product must be installed and connected by a qualified electrician.

  A qualified electrician must demonstrate an in-depth knowledge of:

   Construction of electrical installations in buildings in a coordance with IEC 60364

   Additional safety standards, local connection rules, and building regulations

   Standardized tools and measuring equipment


Failure to follow these instructions will result in death or serious injury.

Offer Marketing Illustration

#### **Product benefits / Features**

# **Technical Features**

# Sedna

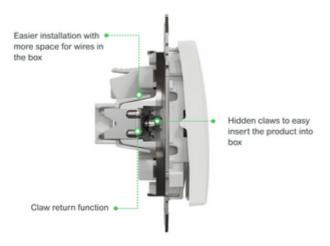


#### Offer Marketing Illustration

#### **Product benefits / Features**

### **Technical Features**

# Sedna

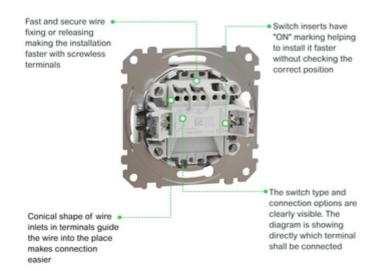

Offer Marketing Illustration

#### **Product benefits / Features**

### **Technical Features**

# Sedna

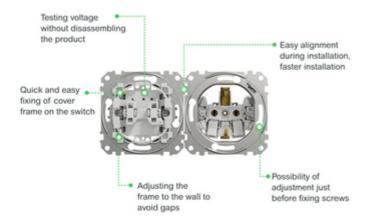


Image of product / Alternate images

#### **Alternative**

