


Contactors 3-pole

DC Operated

| Ratings | | Rated Current | Aux. Contacts | | Type | Coil voltage ¹⁾ | |
|---------|------|---------------|---------------|-------------|------|----------------------------|----|
| AC2 | AC3 | | Built-in | Additional | | 24 | 60 |
| 380V | | AC1 | | see page 34 | 24 | 24V= DC | 5 |
| 400V | 660V | | | | 48 | 60V= DC | 6 |
| 415V | 690V | 690V | | | 110 | 110V= DC | 7 |
| kW | kW | A | NO | NC | 220 | 220V= DC | 8 |
| | | | Type | | | | |



| Rated Current | Rated Voltage | Rated Power | Aux. Contacts | Type | Coil Voltage | Order No | LA | Weight |
|---------------|---------------|-------------|---------------|--------------|--------------|------------|-------------|--------|
| 4 | 5,5 | 25 | 1 - | max. 3 | 24 | K3-10ND10= | LA 301 01.N | 0,25 |
| 4 | 5,5 | 25 | - 1 | HN.. or HA.. | 48 | K3-10ND01= | LA 301 02.N | 0,25 |
| 5,5 | 7,5 | 25 | 1 - | HA.. | 110 | K3-14ND10= | LA 301 41.N | 0,25 |
| 5,5 | 7,5 | 25 | - 1 | | 220 | K3-14ND01= | LA 301 42.N | 0,25 |
| 7,5 | 10 | 32 | 1 - | | 24 | K3-18ND10= | LA 301 81.N | 0,25 |
| 7,5 | 10 | 32 | - 1 | | 48 | K3-18ND01= | LA 301 82.N | 0,25 |
| 11 | 10 | 32 | 1 - | | 110 | K3-22ND10= | LA 302 21.N | 0,25 |
| 11 | 10 | 32 | - 1 | | 220 | K3-22ND01= | LA 302 22.N | 0,25 |
| 11 | 15 | 50 | - - | max. 3 | 24 | K3-24A00= | LA 302 43. | 0,55 |
| 15 | 18,5 | 65 | - - | HN.. or HA.. | 110 | K3-32A00= | LA 303 23. | 0,55 |
| 18,5 | 18,5 | 80 | - - | HA.. + 2HB.. | 220 | K3-40A00= | LA 304 03. | 0,55 |

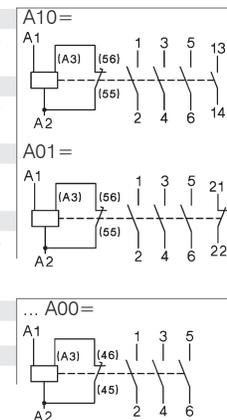


Contactors 4-pole

AC Operated

| Ratings | | Rated Current | Aux. Contacts | | Type | Coil voltage ²⁾ | |
|---------|------|---------------|---------------|-------------|------|----------------------------|-----|
| AC2 | AC3 | | Built-in | Additional | | 24 | 110 |
| 380V | | AC1 | | see page 34 | 24 | 24V 50/60Hz | 0 |
| 400V | | | | | 110 | 110V 50/60Hz | 2 |
| 415V | 400V | 690V | | | 230 | 220-240V 50Hz | 3 |
| kW | kW | A | NO | NC | 400 | 380-415V 50Hz | 4 |
| | | | Type | | | | |



| Rated Current | Rated Voltage | Rated Power | Aux. Contacts | Type | Coil Voltage | Order No | LA | Weight |
|---------------|---------------|-------------|---------------|--------------|--------------|--------------|-----------|--------|
| 4 | 17,5 | 25 | - - | max. 4 | 24 | K3-10NA00-40 | LA30104.N | 0,22 |
| 5,5 | 17,5 | 25 | - - | HN.. or HA.. | 110 | K3-14NA00-40 | LA30144.N | 0,22 |
| 7,5 | 22 | 32 | - - | | 230 | K3-18NA00-40 | LA30184.N | 0,22 |
| 11 | 22 | 32 | - - | | 400 | K3-22NA00-40 | LA30224.N | 0,22 |
| 11 | 31 | 45 | - - | max. 4 | 24 | K2-23A00-40 | LA20234. | 0,65 |
| 15 | 34,5 | 50 | - - | HN.. or HA.. | 110 | K2-30A00-40 | LA20304. | 0,65 |
| 18,5 | 34,5 | 50 | - - | | 230 | K2-37A00-40 | LA20374. | 0,65 |
| 22 | 55 | 80 | - - | max. 6 | 24 | K2-45A00-40 | LA20454. | 1,1 |
| 30 | 69 | 100 | - - | HN.. or HA.. | 110 | K2-60A00-40 | LA20604. | 1,1 |
| 55 | 139 | 200 | - - | 1HKT.. | 230 | K3-116A00-40 | LA31164. | 4,7 |
| 75 | 159 | 230 | - - | + | 400 | K3-151A00-40 | LA31504. | 4,7 |
| 90 | 173 | 250 | - - | 2xHKA11 | 400 | K3-176A00-40 | LA31754. | 4,7 |
| 110 | 242 | 350 | - - | | 230 | K3-210A00-40 | LA32104. | 8 |
| 132 | 310 | 450 | - - | | 400 | K3-260A00-40 | LA32604. | 8 |
| 160 | 346 | 500 | - - | | 400 | K3-316A00-40 | LA33164. | 8 |



Latch for Contactors 4-pole see page 36

1) Other coil voltages on request

2) Coil voltage range and non-standard coil voltages see page 39

3) with integrated coil suppressor

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Main Contacts | Type | K(G)3-10 | K(G)3-14 | K(G)3-18 | K(G)3-22 | K(G)3-24 | K(G)3-32 | K(G)3-40 | K3-50 | K3-62 | K3-74 |
|--|-----------------|-----------|------------|------------|-----------|-----------|-----------|-------------|------------|------------|------------|
| Rated insulation voltage U_i ¹⁾ | V AC | 690 | 690 | 690 | 690 | 690 | 690 | 690 | 690 | 690 | 690 |
| Making capacity I_{eff} at $U_e = 690V$ AC | A | 200 | 200 | 200 | 200 | 400 | 500 | 500 | 700 | 900 | 900 |
| Breaking capacity I_{eff} | | | | | | | | | | | |
| 400V AC | A | 180 | 180 | 200 | 200 | 380 | 400 | 400 | 600 | 800 | 800 |
| K2-09 to K3-22 $\cos\phi = 0,65$ | A | 150 | 150 | 180 | 180 | 300 | 370 | 370 | 500 | 700 | 700 |
| K3-24 to K3-1200 $\cos\phi = 0,35$ | A | 100 | 100 | 150 | 150 | 260 | 340 | 340 | 400 | 500 | 500 |
| 1000V AC | A | - | - | - | - | - | - | - | - | - | - |
| Utilization category AC1 | | | | | | | | | | | |
| Switching of resistive load | | | | | | | | | | | |
| Rated operational current $I_e (=I_{th})$ | 690V A | 25 | 25 | 32 | 32 | 50 | 65 | 80 | 110 | 120 | 130 |
| at 40°C, open | | | | | | | | | | | |
| Rated operational power | | | | | | | | | | | |
| of three-phase resistive loads | | | | | | | | | | | |
| 50-60Hz, $\cos\phi = 1$ | | | | | | | | | | | |
| 220V | kW | 9,5 | 9,5 | 12,2 | 12,2 | 19,0 | 24,7 | 30,4 | 41,9 | 45,7 | 49,5 |
| 230V | kW | 9,9 | 9,9 | 12,7 | 12,7 | 19,9 | 25,9 | 31,8 | 43,8 | 47,7 | 51,7 |
| 240V | kW | 10,4 | 10,4 | 13,3 | 13,3 | 20,8 | 27,0 | 33,2 | 45,7 | 49,8 | 54,0 |
| 380V | kW | 16,4 | 16,4 | 21,0 | 21,0 | 32,9 | 42,7 | 52,6 | 72,3 | 78,9 | 85,5 |
| 400V | kW | 17,3 | 17,3 | 22,1 | 22,1 | 34,6 | 45,0 | 55,4 | 76,1 | 83,0 | 90,0 |
| 415V | kW | 17,9 | 17,9 | 23,0 | 23,0 | 35,9 | 46,7 | 57,4 | 79,0 | 86,2 | 93,3 |
| 440V | kW | 19,0 | 19,0 | 24,4 | 24,4 | 38,1 | 49,5 | 60,9 | 83,7 | 91,3 | 99,0 |
| 500V | kW | 21,6 | 21,6 | 27,7 | 27,7 | 43,3 | 56,2 | 69,2 | 95,2 | 103,8 | 112,5 |
| 660V | kW | 28,5 | 28,5 | 36,5 | 36,5 | 57,1 | 74,2 | 91,3 | 125,6 | 137,0 | 148,4 |
| 690V | kW | 29,8 | 29,8 | 38,2 | 38,2 | 59,7 | 77,6 | 95,5 | 131,3 | 143,2 | 155,2 |
| 1000V | kW | - | - | - | - | - | - | - | - | - | - |
| Rated operational current $I_e (=I_{th})$ | 690V A | 25 | 25 | 32 | 32 | 40 | 55 | 65 | 90 | 100 | 110 |
| at 60°C, enclosed | | | | | | | | | | | |
| Rated operational power | | | | | | | | | | | |
| of three-phase resistive loads | | | | | | | | | | | |
| 50-60Hz, $\cos\phi = 1$ | | | | | | | | | | | |
| 220V | kW | 9,5 | 9,5 | 12,2 | 12,2 | 15,2 | 20,9 | 24,7 | 34,3 | 38,1 | 41,9 |
| 230V | kW | 9,9 | 9,9 | 12,7 | 12,7 | 15,9 | 21,9 | 25,9 | 35,8 | 39,8 | 43,8 |
| 240V | kW | 10,4 | 10,4 | 13,3 | 13,3 | 16,6 | 22,8 | 27,0 | 37,4 | 41,5 | 45,7 |
| 380V | kW | 16,4 | 16,4 | 21,0 | 21,0 | 26,3 | 36,2 | 42,7 | 59,2 | 65,7 | 72,3 |
| 400V | kW | 17,3 | 17,3 | 22,1 | 22,1 | 27,7 | 38,1 | 45,0 | 62,3 | 69,2 | 76,1 |
| 415V | kW | 17,9 | 17,9 | 23,0 | 23,0 | 28,7 | 39,5 | 46,7 | 64,6 | 71,8 | 79,0 |
| 440V | kW | 19,0 | 19,0 | 24,4 | 24,4 | 30,4 | 41,9 | 49,5 | 68,5 | 76,1 | 83,7 |
| 500V | kW | 21,6 | 21,6 | 27,7 | 27,7 | 34,6 | 47,6 | 56,2 | 77,9 | 86,5 | 95,2 |
| 660V | kW | 28,5 | 28,5 | 36,5 | 36,5 | 45,7 | 62,8 | 74,2 | 102,8 | 114,2 | 125,6 |
| 690V | kW | 29,8 | 29,8 | 38,2 | 38,2 | 47,7 | 65,7 | 77,6 | 107,4 | 119,4 | 131,3 |
| 1000V | kW | - | - | - | - | - | - | - | - | - | - |
| Minimum cross-section of conductor | | | | | | | | | | | |
| at load with $I_e (=I_{th})$ | mm ² | 4 | 4 | 6 | 6 | 10 | 16 | 25 | 35 | 50 | 50 |
| Utilization category AC2 and AC3 | | | | | | | | | | | |
| Switching of three-phase motors | | | | | | | | | | | |
| Rated operational current I_e | | | | | | | | | | | |
| open and enclosed | | | | | | | | | | | |
| 220V | A | 12 | 15 | 18 | 22 | 24 | 30 | 40 | 50 | 63 | 74 |
| 230V | A | 11,5 | 14,5 | 18 | 22 | 24 | 30 | 40 | 50 | 62 | 74 |
| 240V | A | 11 | 14 | 18 | 22 | 24 | 32 | 40 | 50 | 62 | 74 |
| 380-400V | A | 10 | 14 | 18 | 22 | 24 | 32 | 40 | 50 | 62 | 74 |
| 415V | A | 9 | 14 | 18 | 22 | 23 | 30 | 40 | 50 | 62 | 74 |
| 440V | A | 9 | 14 | 18 | 22 | 23 | 30 | 40 | 50 | 62 | 74 |
| 500V | A | 7 | 9 | 9 | 9 | 17,5 | 21 | 21 | 33 | 42 | 42 |
| 660-690V | A | 6,5 | 8,5 | 8,5 | 8,5 | 17 | 20 | 20 | 31 | 40 | 40 |
| 1000V | A | - | - | - | - | - | - | - | - | - | - |
| Rated operational power | | | | | | | | | | | |
| of three-phase motors | | | | | | | | | | | |
| 50-60Hz | | | | | | | | | | | |
| 220-230V | kW | 3 | 4 | 5 | 6 | 6 | 8,5 | 11 | 12,5 | 18,5 | 22 |
| 240V | kW | 3 | 4 | 5 | 7 | 7 | 9 | 11,5 | 13,5 | 19 | 23 |
| 380-400V | kW | 4 | 5,5 | 7,5 | 11 | 11 | 15 | 18,5 | 22 | 30 | 37 |
| 415V | kW | 4,5 | 6 | 8,5 | 12 | 12 | 16 | 20 | 24 | 33 | 40 |
| 440V | kW | 4,5 | 6 | 8,5 | 12 | 12 | 16 | 20 | 24 | 33 | 40 |
| 500V | kW | 5,5 | 7,5 | 10 | 10 | 15 | 18,5 | 18,5 | 30 | 37 | 45 |
| 660-690V | kW | 5,5 | 7,5 | 10 | 10 | 15 | 18,5 | 18,5 | 30 | 37 | 45 |
| 1000V | kW | - | - | - | - | - | - | - | - | - | - |

1) Suitable at 690V for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): $U_{imp} = 8kV$.
Data for other conditions on request.

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Typ | K3-90 | K3-115 | K3-116 | K3-151 | K3-176 | K3-210 | K3-260 | K3-316 | K3-450 | K3-550 | K3-700 | K3-860 | K3-1000 | K3-1200 |
|-----------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|
| V~ | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 690 | 690 | 690 | 690 |
| A | 1100 | 1200 | 1200 | 1500 | 2000 | 2100 | 2600 | 3200 | 4500 | 5500 | 7000 | 8600 | 10000 | 12000 |
| A | 950 | 1100 | 1000 | 1200 | 1500 | 1600 | 2100 | 2600 | 4500 | 5500 | 7000 | 8000 | 8000 | 10000 |
| A | 850 | 1000 | 1000 | 1200 | 1500 | 1600 | 2100 | 2600 | 4500 | 5500 | 7000 | 8000 | 8000 | 10000 |
| A | 600 | 600 | 800 | 1000 | 800 | 1200 | 1900 | 2300 | 3200 | 4400 | 5600 | 6900 | 7000 | 8000 |
| A | - | - | 400 | 500 | 600 | 700 | 850 | 1000 | - | - | - | - | - | - |
| A | 160 | 200 | 200 | 230 | 250 | 350 | 450 | 500 | 700 | 760 | 1000 | 1100 | 1200 | 1350 |
| kW | 60 | 76 | 76 | 87 | 95 | 133 | 171 | 190 | 266 | 289 | 381 | 419 | 457 | 514 |
| kW | 63 | 79 | 79 | 91 | 99 | 139 | 179 | 199 | 279 | 302 | 398 | 438 | 478 | 537 |
| kW | 66 | 83 | 83 | 95 | 103 | 145 | 187 | 207 | 291 | 315 | 415 | 457 | 498 | 561 |
| kW | 105 | 131 | 131 | 151 | 164 | 230 | 296 | 329 | 460 | 500 | 658 | 724 | 789 | 888 |
| kW | 110 | 138 | 138 | 159 | 173 | 242 | 311 | 346 | 485 | 526 | 692 | 762 | 831 | 935 |
| kW | 115 | 143 | 143 | 165 | 179 | 251 | 323 | 359 | 503 | 546 | 718 | 790 | 862 | 970 |
| kW | 121 | 152 | 152 | 175 | 190 | 266 | 342 | 381 | 533 | 579 | 762 | 838 | 914 | 1028 |
| kW | 138 | 173 | 173 | 199 | 216 | 303 | 389 | 453 | 606 | 658 | 866 | 952 | 1039 | 1169 |
| kW | 182 | 228 | 228 | 262 | 285 | 400 | 514 | 571 | 800 | 868 | 1143 | 1257 | 1371 | 1543 |
| kW | 191 | 239 | 239 | 274 | 298 | 418 | 537 | 597 | 836 | 908 | 1195 | 1314 | 1434 | 1613 |
| kW | 221 | 277 | 216 | 318 | 346 | 433 | 546 | 606 | 692 | 866 | - | - | - | - |
| A | 145 | 170 | 170 | 180 | 200 | 280 | 360 | 400 | 550 | 600 | 800 | 875 | 960 | 1080 |
| kW | 55 | 64 | 64 | 68 | 76 | 106 | 137 | 152 | 209 | 228 | 304 | 333 | 365 | 411 |
| kW | 57 | 67 | 67 | 71 | 79 | 111 | 143 | 159 | 219 | 239 | 318 | 348 | 382 | 430 |
| kW | 59 | 70 | 70 | 74 | 83 | 116 | 150 | 166 | 228 | 249 | 332 | 363 | 399 | 448 |
| kW | 95 | 111 | 111 | 118 | 131 | 184 | 237 | 263 | 362 | 395 | 526 | 575 | 631 | 710 |
| kW | 100 | 117 | 117 | 124 | 138 | 193 | 249 | 277 | 381 | 415 | 554 | 606 | 665 | 748 |
| kW | 104 | 122 | 122 | 129 | 143 | 201 | 259 | 287 | 395 | 431 | 575 | 628 | 690 | 776 |
| kW | 110 | 129 | 129 | 137 | 152 | 213 | 274 | 304 | 419 | 457 | 609 | 666 | 731 | 823 |
| kW | 125 | 147 | 147 | 155 | 173 | 242 | 312 | 346 | 476 | 519 | 692 | 757 | 831 | 935 |
| kW | 165 | 194 | 194 | 205 | 228 | 320 | 412 | 457 | 628 | 685 | 914 | 1000 | 1097 | 1234 |
| kW | 173 | 202 | 202 | 215 | 239 | 334 | 430 | 478 | 657 | 717 | 956 | 1045 | 1147 | 1290 |
| kW | 166 | 187 | 216 | 277 | 346 | 388 | 499 | 554 | 692 | 866 | - | - | - | - |
| mm ² | 95 | 120 | 95 | 95 | 120 | 240 | 2x150 | 2x(30x6) | 2x(40x5) | 2x(50x5) | 2x(60x5) | 2x(60x6) | 2x(60x6) | 2x(60x8) |
| A | 90 | 115 | 115 | 150 | 175 | 210 | 260 | 315 | 450 | 550 | 700 | 860 | 1000 | 1200 |
| A | 90 | 115 | 115 | 150 | 175 | 210 | 260 | 315 | 450 | 550 | 700 | 860 | 1000 | 1200 |
| A | 90 | 115 | 115 | 150 | 175 | 210 | 260 | 315 | 450 | 550 | 700 | 860 | 1000 | 1200 |
| A | 90 | 115 | 115 | 150 | 175 | 210 | 260 | 315 | 450 | 550 | 700 | 860 | 1000 | 1200 |
| A | 90 | 115 | 115 | 150 | 175 | 210 | 260 | 315 | 450 | 550 | 700 | 860 | 1000 | 1200 |
| A | 90 | 115 | 115 | 150 | 175 | 210 | 260 | 315 | 450 | 550 | 700 | 860 | 1000 | 1200 |
| A | 60 | 60 | 115 | 150 | 175 | 210 | 260 | 315 | 450 | 550 | 700 | 860 | 1000 | 1200 |
| A | 58 | 58 | 100 | 120 | 140 | 150 | 180 | 240 | 400 | 500 | 630 | 700 | 860 | 1000 |
| A | 58 | 58 | 45 | 60 | 70 | 85 | 100 | 125 | 200 | 250 | - | - | - | - |
| kW | 25 | 33 | 30 | 40 | 50 | 60 | 75 | 90 | 132 | 175 | 225 | 280 | 325 | 390 |
| kW | 27 | 35 | 35 | 45 | 55 | 65 | 80 | 100 | 140 | 185 | 235 | 290 | 335 | 400 |
| kW | 45 | 55 | 55 | 75 | 90 | 110 | 132 | 160 | 250 | 300 | 400 | 500 | 580 | 680 |
| kW | 49 | 63 | 59 | 80 | 95 | 115 | 140 | 180 | 257 | 315 | 415 | 515 | 600 | 710 |
| kW | 49 | 63 | 63 | 85 | 100 | 125 | 150 | 190 | 270 | 335 | 450 | 530 | 630 | 750 |
| kW | 55 | 55 | 75 | 90 | 100 | 132 | 160 | 210 | 300 | 375 | 500 | 600 | 720 | 850 |
| kW | 55 | 55 | 90 | 110 | 132 | 132 | 160 | 210 | 375 | 500 | 630 | 700 | 850 | 1000 |
| kW | 55 | 55 | 55 | 75 | 90 | 110 | 132 | 160 | 280 | 355 | - | - | - | - |

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Main Contacts | | Type | K(G)3-10 | K(G)3-14 | K(G)3-18 | K(G)3-22 | K(G)3-24 | K(G)3-32 | K(G)3-40 | K3-50 | K3-62 | K3-74 |
|---|-----------------|-----------|-----------|------------|------------|------------|-----------|-----------|-------------|-----------|-----------|-----------|
| Utilization category AC4 | | | | | | | | | | | | |
| Switching of squirrel cage motors, inching | | | | | | | | | | | | |
| Rated operational current I_e | 220V | A | 12 | 15 | 18 | 18 | 24 | 30 | 40 | 50 | 63 | 63 |
| open and enclosed | 230V | A | 11,5 | 14,5 | 18 | 18 | 24 | 30 | 40 | 50 | 62 | 62 |
| | 240V | A | 11 | 14 | 18 | 18 | 24 | 32 | 40 | 50 | 62 | 62 |
| | 380-400V | A | 10 | 14 | 18 | 18 | 24 | 32 | 40 | 50 | 62 | 62 |
| | 415V | A | 9 | 14 | 18 | 18 | 23 | 30 | 37 | 45 | 60 | 60 |
| | 440V | A | 9 | 14 | 18 | 18 | 23 | 30 | 37 | 45 | 55 | 55 |
| | 500V | A | 9 | 12 | 16 | 16 | 17,5 | 21 | 21 | 33 | 42 | 42 |
| | 660V | A | 7 | 9 | 9 | 9 | 17 | 20 | 20 | 31 | 40 | 40 |
| | 690V | A | 6,5 | 8,5 | 8,5 | 8,5 | 17 | 20 | 20 | 31 | 40 | 40 |
| | 1000V | A | - | - | - | - | - | - | - | - | - | - |
| Rated operational power of three-phase motors 50-60Hz | 220-230V | kW | 3 | 4 | 5 | 5 | 6 | 8,5 | 11 | 12,5 | 18,5 | 18,5 |
| | 240V | kW | 3 | 4 | 5 | 5 | 7 | 9 | 11,5 | 13,5 | 19 | 19 |
| | 380-400V | kW | 4 | 5,5 | 7,5 | 7,5 | 11 | 15 | 18,5 | 22 | 30 | 30 |
| | 415V | kW | 4,5 | 6 | 8,5 | 8,5 | 12 | 16 | 20 | 24 | 33 | 33 |
| | 440V | kW | 4,5 | 6 | 8,5 | 8,5 | 12 | 16 | 20 | 24 | 33 | 33 |
| | 500V | kW | 5,5 | 7,5 | 10 | 10 | 15 | 18,5 | 18,5 | 30 | 37 | 37 |
| | 660-690V | kW | 5,5 | 7,5 | 10 | 10 | 15 | 18,5 | 18,5 | 30 | 37 | 37 |
| | 1000V | kW | - | - | - | - | - | - | - | - | - | - |
| Utilization category AC5a | | | | | | | | | | | | |
| Switching of gas discharge lamps | | | | | | | | | | | | |
| Rated operational current I_e per pole at 220/230V | | | | | | | | | | | | |
| Fluorescent lamps, uncompensated and serial compensated | | A | 20 | 20 | 25 | 25 | 40 | 52 | 64 | 88 | 96 | 104 |
| parallel compensated | | A | 7 | 9 | 9 | 9 | 18 | 22 | 22 | 30 | 40 | 45 |
| dual-connection | | A | 22,5 | 22,5 | 28 | 28 | 45 | 58 | 72 | 98 | 108 | 117 |
| Metal halide lamps ¹⁾ , uncompensated | | A | 12 | 15 | 19 | 19 | 30 | 39 | 48 | 66 | 72 | 78 |
| parallel compensated | | A | 7 | 9 | 9 | 9 | 18 | 22 | 22 | 30 | 40 | 45 |
| Mercury-vapour lamps ²⁾ , uncompensated | | A | 22,5 | 25 | 28 | 28 | 45 | 58 | 72 | 99 | 108 | 117 |
| parallel compensated | | A | 7 | 9 | 9 | 9 | 18 | 22 | 22 | 30 | 40 | 45 |
| Mixed light lamps ³⁾ | | A | 20 | 20 | 25 | 25 | 40 | 52 | 64 | 88 | 96 | 104 |
| Utilization category AC5b | | | | | | | | | | | | |
| Switching of incandescent lamps⁴⁾ | | | | | | | | | | | | |
| Rated operational current I_e per pole at 220/230V | | | | | | | | | | | | |
| | | A | 12,5 | 12,5 | 12,5 | 12,5 | 25 | 31 | 31 | 43 | 56 | 56 |

1) Metal halide lamps and sodium-vapour lamps (high- and low-pressure lamps)

2) High-pressure lamps

3) Blended lamps, containing a mercury high-pressure unit and a tungsten helix in a fluorescent glass bulb (daylight lamps)

4) Current inrush approx. 16 x I_e

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Type | K3-90 | K3-115 | K3-151 | K3-176 | K3-210 | K3-260 | K3-316 | K3-450 | K3-550 | K3-700 | K3-860 | K3-1000 | K3-1200 |
|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| A | 85 | 98 | 55 | 63 | 85 | 100 | 120 | 150 | 180 | 230 | 280 | 340 | 400 |
| A | 85 | 98 | 55 | 63 | 85 | 100 | 120 | 150 | 180 | 230 | 280 | 340 | 400 |
| A | 85 | 98 | 55 | 63 | 85 | 100 | 120 | 150 | 180 | 230 | 280 | 340 | 400 |
| A | 85 | 85 | 55 | 63 | 85 | 100 | 120 | 150 | 180 | 230 | 280 | 340 | 400 |
| A | 85 | 85 | 55 | 63 | 85 | 100 | 120 | 150 | 180 | 230 | 280 | 340 | 400 |
| A | 85 | 85 | 55 | 63 | 85 | 100 | 120 | 150 | 180 | 230 | 280 | 340 | 400 |
| A | 85 | 85 | - | - | - | - | - | - | - | - | - | - | - |
| A | 60 | 60 | - | - | - | - | - | - | - | - | - | - | - |
| A | 57,5 | 57,5 | - | - | - | - | - | - | - | - | - | - | - |
| A | - | - | - | - | - | - | - | - | - | - | - | - | - |
| kW | 25 | 30 | 15 | 18,5 | 25 | 30 | 37 | 45 | 51 | 68 | 80 | 110 | 132 |
| kW | 27 | 32 | 15,5 | 19 | 26 | 31 | 38 | 47 | 53 | 71 | 83 | 115 | 137 |
| kW | 45 | 45 | 25 | 30 | 45 | 55 | 63 | 75 | 90 | 120 | 150 | 185 | 220 |
| kW | 49 | 49 | 25 | 33 | 45 | 55 | 65 | 80 | 100 | 132 | 160 | 200 | 230 |
| kW | 49 | 49 | 30 | 34 | 48 | 55 | 67 | 85 | 100 | 132 | 160 | 200 | 230 |
| kW | 55 | 55 | 25 | 30 | 55 | 65 | 75 | 100 | 110 | 150 | 185 | 220 | 257 |
| kW | 55 | 55 | 25 | 30 | 55 | 65 | 75 | 100 | 110 | 150 | 185 | 220 | 257 |
| kW | - | - | - | - | - | - | - | - | - | - | - | - | - |
| A | 100 | 120 | 120 | 140 | 180 | 220 | 280 | 360 | 450 | 570 | 700 | 850 | 1000 |
| A | 55 | 70 | 85 | 100 | 130 | 160 | 200 | 300 | 360 | 460 | 550 | 660 | 800 |
| A | 112 | 144 | 120 | 140 | 180 | 220 | 280 | 360 | 450 | 570 | 700 | 850 | 1000 |
| A | 85 | 90 | 95 | 110 | 140 | 180 | 230 | 300 | 380 | 490 | 610 | 750 | 890 |
| A | 55 | 70 | 75 | 85 | 110 | 140 | 170 | 260 | 300 | 400 | 480 | 580 | 700 |
| A | 112 | 144 | 120 | 140 | 180 | 220 | 280 | 360 | 450 | 570 | 700 | 850 | 1000 |
| A | 55 | 70 | 75 | 85 | 110 | 140 | 170 | 260 | 300 | 400 | 480 | 580 | 700 |
| A | 100 | 120 | 100 | 120 | 160 | 200 | 250 | 320 | 400 | 500 | 600 | 700 | 800 |
| A | 69 | 75 | 100 | 120 | 160 | 190 | 220 | 260 | 315 | 440 | 500 | 560 | 630 |

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Main Contacts | | Type | K(G)3-10 | K(G)3-14 | K(G)3-18 | K(G)3-22 | K(G)3-24 | K(G)3-32 | K(G)3-40 | K3-50 | K3-62 | K3-74 |
|--|-------------------|--------|----------|----------|----------|----------|----------|----------|----------|-------|-------|-------------------|
| Utilization category AC6a | | | | | | | | | | | | |
| Transformer primary switching | | | | | | | | | | | | |
| at inrush | | n | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 |
| Rated operational current I_e | 400V | A | 4,5 | 5,5 | 7,5 | 7,5 | 10,5 | 13,5 | 13,5 | 20 | 27 | 33 |
| Rated operational power | 220-230V | kVA | 1,8 | 2,2 | 3 | 3 | 4,2 | 5,4 | 5,4 | 8 | 10,7 | 13 |
| dependent on inrush n | 240V | kVA | 1,9 | 2,3 | 3,1 | 3,1 | 4,3 | 5,6 | 5,6 | 8,3 | 11,2 | 13,5 |
| | 380-400V | kVA | 3,1 | 3,8 | 5,2 | 5,2 | 7,3 | 9,3 | 9,3 | 13,5 | 18,5 | 22,5 |
| For different inrush-factors x | 415-440V | kVA | 3,4 | 4,2 | 5,7 | 5,7 | 8 | 10,2 | 10,2 | 15 | 20,5 | 25 |
| use the following formula: | 500V | kVA | 3,9 | 4,8 | 6,5 | 6,5 | 9 | 11,5 | 11,5 | 17 | 23 | 28 |
| $P_x = P_n \cdot (n/x)$ | 660-690V | kVA | 5,4 | 6,5 | 9 | 9 | 12,5 | 16 | 16 | 24 | 32 | 39 |
| Utilization category AC6b | | | | | | | | | | | | |
| Switching of three-phase capacitors | | | | | | | | | | | | |
| Maximum inrush current (peak value) | | | | | | | | | | | | |
| as multiple k of the capacitor rated current | | k | 35 | 25 | 20 | 20 | 25 | 25 | 25 | 25 | 25 | 20 |
| Rated operational current I_e | 500V | A | 8 | 12 | 15,5 | 15,5 | 23 | 32 | 32 | 45 | 60 | 70 |
| Rated operational power | 220-230V | kVAr | 3 | 4,5 | 6 | 6 | 8,5 | 12 | 12 | 17 | 24 | 28 |
| ($\sin\phi \rightarrow 1$) | 240V | kVAr | 3,5 | 5 | 6,5 | 6,5 | 9,5 | 13 | 13 | 18,5 | 25 | 29 |
| | 380-400V | kVAr | 5 | 7,5 | 10 | 10 | 15 | 20 | 20 | 29 | 39 | 46 |
| For different multiples x | 415-440V | kVAr | 5,5 | 8 | 11 | 11 | 16 | 22 | 22 | 32 | 43 | 50 |
| use the following formula: | 500V | kVAr | 7 | 10 | 13 | 13 | 20 | 26 | 26 | 39 | 50 | 58 |
| $P_x = P_k \cdot (k/x)$ | 660-690V | kVAr | 7 | 10 | 13 | 13 | 20 | 26 | 26 | 40 | 50 | 58 |
| Switching of reactive capacitor banks | | | | | | | | | | | | |
| Rated operational current I_e | 690V | A | 8 | 13 | 18 | 20 | 28 | 36 | 42 | 48 | 72 | 108 ¹⁾ |
| Rated operational power | 220-230V | kVAr | 2,9 | 5 | 7 | 7,5 | 11 | 14 | 16 | 20 | 28 | 33 |
| | 240V | kVAr | 3,1 | 5,4 | 7 | 8 | 11 | 14 | 17 | 20 | 28 | 36 |
| | 380-400V | kVAr | 5 | 9 | 12,5 | 13 | 20 | 25 | 27,5 | 33,3 | 50 | 75 ¹⁾ |
| | 415-440V | kVAr | 5,5 | 9,5 | 13 | 14 | 22 | 27 | 30 | 36 | 53 | 75 ¹⁾ |
| | 500V | kVAr | 6 | 11 | 15 | 17 | 25 | 30 | 36 | 40 | 60 | 75 |
| | 660-690V | kVAr | 8 | 15 | 20 | 22 | 33 | 41 | 48 | 55 | 82 | 100 |
| | 1000V | kVAr | - | - | - | - | - | - | - | - | - | - |
| Utilization category DC1 | | | | | | | | | | | | |
| Switching of resistive load | | | | | | | | | | | | |
| Time constant $L/R \leq 1ms$ | | | | | | | | | | | | |
| Rated operational current I_e | 1 pole | 24V A | 20 | 25 | 32 | 32 | 50 | 65 | 80 | 110 | 120 | 130 |
| | | 60V A | 20 | 25 | 32 | 32 | 50 | 65 | 80 | 110 | 120 | 130 |
| | | 110V A | 6 | 6 | 6 | 6 | 10 | 10 | 10 | 12 | 12 | 12 |
| | | 220V A | 0,8 | 0,8 | 0,8 | 0,8 | 1,4 | 1,4 | 1,4 | 1,4 | 1,4 | 1,4 |
| | 3 poles in series | 24V A | 20 | 25 | 32 | 32 | 50 | 65 | 80 | 110 | 120 | 130 |
| | | 60V A | 20 | 25 | 32 | 32 | 50 | 65 | 80 | 110 | 120 | 130 |
| | | 110V A | 20 | 25 | 32 | 32 | 50 | 65 | 80 | 110 | 120 | 130 |
| | | 220V A | 16 | 20 | 20 | 20 | 30 | 35 | 35 | 63 | 80 | 80 |
| Utilization category DC3 and DC5 | | | | | | | | | | | | |
| Switching of shunt motors and series motors | | | | | | | | | | | | |
| Time constant $L/R \leq 15ms$ | | | | | | | | | | | | |
| Rated operational current I_e | 1 pole | 24V A | 20 | 25 | 32 | 32 | 50 | 65 | 80 | 110 | 120 | 130 |
| | | 60V A | 6 | 6 | 6 | 6 | 30 | 30 | 30 | 60 | 60 | 60 |
| | | 110V A | 1,2 | 1,2 | 1,2 | 1,2 | 1,8 | 1,8 | 1,8 | 1,8 | 1,8 | 1,8 |
| | | 220V A | 0,2 | 0,2 | 0,2 | 0,2 | 0,2 | 0,2 | 0,2 | 0,25 | 0,25 | 0,25 |
| | 3 poles in series | 24V A | 20 | 25 | 32 | 32 | 50 | 65 | 80 | 110 | 120 | 130 |
| | | 60V A | 20 | 25 | 32 | 32 | 40 | 40 | 40 | 80 | 80 | 80 |
| | | 110V A | 20 | 20 | 20 | 20 | 40 | 40 | 40 | 80 | 80 | 80 |
| | | 220V A | 2,5 | 2,5 | 2,5 | 2,5 | 4 | 4 | 4 | 5 | 5 | 5 |

1) Consider resistive load (I_{th}). see page 44

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Type | K3-90 | K3-115 | K3-151 | K3-176 | K3-210 | K3-260 | K3-316 | K3-450 | K3-550 | K3-700 | K3-860 | K3-1000 | K3-1200 |
|------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|---------|
| n | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 |
| A | 38 | 50 | 65 | 80 | 90 | 120 | 142 | 203 | 248 | 315 | 390 | 450 | 540 |
| kVA | 15 | 20 | 25 | 30 | 34 | 45 | 54 | 77 | 95 | 120 | 148 | 170 | 200 |
| kVA | 15,5 | 20,5 | 27 | 33 | 37 | 50 | 59 | 80 | 100 | 130 | 160 | 185 | 220 |
| kVA | 26 | 34 | 45 | 55 | 60 | 80 | 95 | 140 | 170 | 210 | 270 | 310 | 370 |
| kVA | 29 | 38 | 46 | 57 | 63 | 85 | 100 | 145 | 175 | 220 | 280 | 320 | 380 |
| kVA | 33 | 43 | 55 | 69 | 75 | 100 | 120 | 170 | 210 | 270 | 330 | 380 | 460 |
| kVA | 45 | 60 | 56 | 69 | 100 | 135 | 160 | 200 | 250 | 320 | 350 | 500 | 600 |
| k | 20 | 20 | 20 | 20 | 25 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| A | 87 | 100 | 120 | 155 | 195 | 225 | 255 | 300 | 370 | 440 | 520 | 680 | 760 |
| kVAr | 33 | 38 | 45 | 60 | 75 | 90 | 100 | 115 | 145 | 170 | 200 | 260 | 290 |
| kVAr | 36 | 42 | 52 | 62 | 78 | 94 | 104 | 120 | 150 | 175 | 205 | 270 | 300 |
| kVAr | 57 | 65 | 80 | 100 | 130 | 155 | 170 | 200 | 250 | 300 | 350 | 450 | 500 |
| kVAr | 60 | 70 | 95 | 110 | 135 | 165 | 175 | 210 | 260 | 310 | 360 | 465 | 520 |
| kVAr | 70 | 80 | 100 | 130 | 170 | 194 | 220 | 260 | 320 | 380 | 450 | 590 | 660 |
| kVAr | 70 | 80 | 100 | 130 | 170 | 194 | 220 | 260 | 320 | 380 | 450 | 590 | 660 |
| A | 115 | 144 | 115 | 140 | 200 | 225 | 250 | 330 | 420 | 550 | 600 | 680 | 760 |
| kVAr | 45 | 55 | 43 | 53 | 76 | 85 | 95 | 125 | 160 | 209 | 228 | 260 | 290 |
| kVAr | 45 | 55 | 45 | 55 | 80 | 90 | 100 | 130 | 170 | 220 | 240 | 280 | 310 |
| kVAr | 80 | 100 | 75 | 90 | 130 | 145 | 160 | 210 | 270 | 350 | 390 | 440 | 480 |
| kVAr | 100 | 120 | 80 | 100 | 140 | 160 | 170 | 230 | 290 | 380 | 420 | 470 | 530 |
| kVAr | 105 | 125 | 95 | 120 | 170 | 190 | 210 | 280 | 350 | 450 | 500 | 570 | 640 |
| kVAr | 120 | 148 | 125 | 150 | 200 | 230 | 260 | 350 | 450 | 600 | 650 | 700 | 800 |
| kVAr | 160 | 200 | 155 | 200 | 300 | 340 | 400 | 500 | 650 | - | - | - | - |
| A | 160 | 200 | - | - | - | - | - | - | - | - | - | - | - |
| A | 160 | 200 | - | - | - | - | - | - | - | - | - | - | - |
| A | 20 | 25 | - | - | - | - | - | - | - | - | - | - | - |
| A | 2 | 2,5 | - | - | - | - | - | - | - | - | - | - | - |
| A | 160 | 200 | 200 | 250 | 350 | 400 | 450 | 600 | 760 | 1000 | 1100 | 1200 | 1350 |
| A | 160 | 200 | 200 | 250 | 350 | 400 | 450 | 600 | 760 | 1000 | 1100 | 1200 | 1350 |
| A | 160 | 200 | 150 | 170 | 250 | 280 | 315 | 400 | 480 | 560 | 630 | 800 | 900 |
| A | 100 | 160 | 80 | 100 | 150 | 180 | 200 | 250 | 315 | 400 | 450 | 500 | 600 |
| A | 160 | 200 | - | - | - | - | - | - | - | - | - | - | - |
| A | 85 | 110 | - | - | - | - | - | - | - | - | - | - | - |
| A | 2 | 2,5 | - | - | - | - | - | - | - | - | - | - | - |
| A | 0,5 | 0,5 | - | - | - | - | - | - | - | - | - | - | - |
| A | 160 | 200 | - | - | - | - | - | - | - | - | - | - | - |
| A | 100 | 110 | - | - | - | - | - | - | - | - | - | - | - |
| A | 100 | 110 | - | - | - | - | - | - | - | - | - | - | - |
| A | 7 | 8 | - | - | - | - | - | - | - | - | - | - | - |

Contactors


Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Main Contacts | | | Type | K(G)3-10 | K(G)3-14 | K(G)3-18 | K(G)3-22 | K(G)3-24 | K(G)3-32 | K(G)3-40 | K3-50 | K3-62 | K3-74 |
|---|-----------------------------------|-----------------|------|---|----------|----------|----------|---|----------|----------|-------|---|-------|
| Maximum ambient temperature | | | | | | | | | | | | | |
| Operation | open | °C | | | | | | -40 to +60 (+90) ¹⁾ | | | | | |
| | enclosed | °C | | | | | | -40 to +40 | | | | | |
| with thermal overload relay | open | °C | | | | | | -25 to +60 | | | | | |
| | enclosed | °C | | | | | | -25 to +40 | | | | | |
| Storage | | °C | | | | | | -50 to +90 | | | | | |
| Short circuit protection | | | | | | | | | | | | | |
| for contactors without thermal overload relay | | | | | | | | | | | | | |
| Coordination-type "1" according to IEC 947-4-1 | | | | | | | | | | | | | |
| Contact welding without hazard of persons | | | | | | | | | | | | | |
| max. fuse size | gL (gG) | A | 63 | 63 | 63 | 63 | 80 | 80 | 80 | 160 | 160 | 160 | 160 |
| Coordination-type "2" according to IEC 947-4-1 | | | | | | | | | | | | | |
| Light contact welding accepted | | | | | | | | | | | | | |
| max. fuse size | gL (gG) | A | 25 | 35 | 35 | 35 | 50 | 50 | 50 | 100 | 125 | 125 | 125 |
| Contact welding not accepted | | | | | | | | | | | | | |
| max. fuse size | gL (gG) | A | 16 | 16 | 16 | 16 | 25 | 35 | 35 | 50 | 63 | 63 | 63 |
| For contactors with thermal overload relay the device with the smaller admissible backup fuse (contactor or thermal overload relay) determines the fuse size. | | | | | | | | | | | | | |
| Cable cross-sections | | | | | | | | | | | | | |
| for contactors without thermal overload relay | | | | | | | | | | | | | |
| 1 cable per clamp | | | | | | | | | | | | | |
| main connector | solid or stranded | mm ² | |  | | | |  | | | |  | |
| | flexible | mm ² | | 0,75 - 6 | | | | 1,5 - 25 | | | | 4 - 50 | |
| | flexible with multicore cable end | mm ² | | 1 - 4 | | | | 2,5 - 16 | | | | 10 - 35 | |
| | | | | 0,75 - 4 | | | | 1,5 - 16 | | | | 6 - 35 | |
| 2 cables per clamp | | | | | | | | | | | | | |
| | solid or stranded | mm ² | | 6+(1-6) / 4+(0,75-4) | | | | 16+(2,5-16) / 10+(4-16) | | | | 50+4 / 35+6 / 25+(6-16) | |
| | flexible | mm ² | | 2,5+(0,75-2,5) / 1,5+(0,75-1,5) | | | | 6+(4-16) / 4+(2,5-16) | | | | 16+(6-16) / 10+(6-16) | |
| | | | | 6+(1,5-4) / 4+(1-4) | | | | 16+(2,5-6) / 10+(4-10) | | | | 50+(4-10) / 35+(4-16) | |
| | | | | 2,5+(0,75-2,5) / 1,5+(0,75-1,5) | | | | 6+(4-16) / 4+(2,5-16) | | | | 25+(4-25) / 16+(4-16) | |
| 1 cable per clamp | | | | | | | | | | | | | |
| main connector | solid | AWG | | 18 - 10 | | | | 16 - 10 | | | | 12 - 10 | |
| | flexible | AWG | | 18 - 10 | | | | 14 - 4 | | | | 10 - 0 | |
| 2 cables per clamp | | | | | | | | | | | | | |
| | solid | AWG | | 10+(16-10) / 12+(18-12) | | | | 10+(16-10) / 12+(18-12) | | | | 10+(12-10) / 12+12 | |
| | flexible | AWG | | 14+(18-14) / 16+(18-16) | | | | 14+(18-14) / 16+(18-16) | | | | 1+(12-10) / 2+(8-12) | |
| | | | | 10+(14-10) / 12+(18-12) | | | | 4+(18-12) / 6+(18-8) | | | | 3+(12-8) / 4+(10-6) | |
| | | | | 14+(18-14) / 16+(18-16) | | | | 8+(18-8) / 10+(18-12) | | | | | |
| Frequency of operations z | | | | | | | | | | | | | |
| Contactors without thermal overload relay | | | | | | | | | | | | | |
| | without load | 1/h | | 10000 | | | | 7000 | | | | 7000 | |
| | AC3, I _e | 1/h | | 600 | | | | 600 | | | | 400 | |
| | AC4, I _e | 1/h | | 120 | | | | 120 | | | | 120 | |
| | DC3, I _e | 1/h | | 600 | | | | 600 | | | | 400 | |
| Mechanical life | | | | | | | | | | | | | |
| AC operated | S x 10 ⁶ | | | 10 | | | | 10 | | | | 10 | |
| DC operated | S x 10 ⁶ | | | 10 | | | | 10 | | | | 10 | |
| DC-solenoid operated (KG3) | S x 10 ⁶ | | | 50 | | | | 50 | | | | - | |
| Short time current | | | | | | | | | | | | | |
| | 10s-current | A | 96 | 120 | 144 | 176 | 184 | 240 | 296 | 450 | 504 | 592 | 592 |
| | 120s-current | A | 42 | 52 | 58 | 66 | 80 | 97 | 110 | 195 | 203 | 222 | 222 |
| Power loss per pole | | | | | | | | | | | | | |
| | at I _e /AC3 400V | W | 0,21 | 0,35 | 0,5 | 0,75 | 0,7 | 1,3 | 2 | 2,2 | 3,9 | 5,5 | 5,5 |
| | contact resistance | mOhm | 2,1 | 1,8 | 1,5 | 1,5 | 1,2 | 1,2 | 1,2 | 1 | 1 | 1 | 1 |
| Resistance to shock acc. to IEC 68-2-27 | | | | | | | | | | | | | |
| Shock time 20ms sine-wave | NO | g | 10 | 10 | 10 | 10 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| | NC | g | 6 | 6 | 6 | 6 | - | - | - | - | - | - | - |

1) With reduced control voltage range 0,9 up to 1,0 x U_e and with reduced rated current I_e/AC1 according to I_e/AC3

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Type | K3-90 | K3-115 | K3-116 | K3-151 | K3-176 | K3-210 | K3-260 | K3-316 | K3-450 | K3-550 | K3-700 | K3-860 | K3-1000 | K3-1200 |
|---------------------|--|---------|--|--------|---|--------|--|--------|---|---|---|--|-----------------|---------|
| °C | -40 to +60 (+90) ¹⁾ | | | | | | | | | | | | | |
| °C | -40 to +40 | | | | | | | | | | | | | |
| °C | -25 to +60 | | | | | | | | | | | | | |
| °C | -25 to +40 | | | | | | | | | | | | | |
| °C | -50 to +90 | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| A | 250 | 250 | 200 | 250 | 315 | 400 | 450 | 500 | 630 | 630 | 800 | 1000 | 1000 | 1250 |
| A | 160 | 200 | 160 | 200 | 250 | 315 | 400 | 400 | 500 | 560 | - | - | - | - |
| A | 100 | 125 | 125 | 160 | 200 | 250 | 315 | - | - | - | - | - | - | - |
| mm ² |  0,5 - 95 10 - 120 | |  busbar 18 x 4 screw M8 | |  busbar 25 x 6 screw M10 | |  busbar 30 x 5 screw M12 | |  busbar 40 x 6 screw M12 |  busbar 50 x 8 screw M12 |  busbar 50 x 8 screw M14 |  busbar 50 x 10 screw 2 x M12 | | |
| mm ² | 0,5 - 70 25 - 95 | | | | | | | | | | | | | |
| mm ² | 0,5 - 70 10 - 95 | | | | | | | | | | | | | |
| mm ² | 0,5 - 95 + 10 - 120 | | | | | | | | | | | | | |
| mm ² | 0,5 - 70 + 25 - 95 | | | | | | | | | | | | | |
| AWG | 18 - 10 | - | | | | | | | | | | | | |
| AWG | 18 - 3/0 | 8 - 4/0 | | | | | | | | | | | | |
| AWG | - | - | | | | | | | | | | | | |
| AWG | 18 - 3/0 + 8 - 4/0 | - | | | | | | | | | | | | |
| 1/h | 3000 | | 1200 | | | 1200 | | | 1200 | | | | 300 | |
| 1/h | 300 | | - | | | - | | | - | | | | - | |
| 1/h | 120 | | - | | | - | | | - | | | | - | |
| 1/h | 300 | | - | | | - | | | - | | | | - | |
| S x 10 ⁶ | 5 | | 10 | | | 5 | | | 5 | | | | 5 ³⁾ | |
| S x 10 ⁶ | 5 | | 10 | | | 5 | | | 5 | | | | 5 ³⁾ | |
| S x 10 ⁶ | - | | - | | | - | | | - | | | | - | |
| A | 680 | 880 | 920 | 1200 | 1400 | 1800 | 2200 | 2600 | 3600 | 4400 | 5600 | 6900 | 8000 | 9600 |
| A | 275 | 330 | 410 | 500 | 575 | 800 | 900 | 1000 | 1400 | 1750 | 2200 | 2600 | 3000 | 3600 |
| W | 4,8 | 7,9 | 7,9 | 9 | 11 | 8 | 11 | 14,9 | 26,3 | 33,3 | 49 | 59,2 | 60 | 72 |
| mOhm | 0,6 | 0,5 | 0,5 | 0,4 | 0,35 | 0,18 | 0,16 | 0,15 | | | | | | |
| g | 7 | 7 | - | - | - | - | - | - | - | - | - | - | - | - |
| g | 5 | 5 | - | - | - | - | - | - | - | - | - | - | - | - |

1) With reduced control voltage range 0,9 up to 1,0 x U_s and with reduced rated current I_e /AC1 according to I_e /AC3

2) With reduced control voltage range 1,0 x U_s and with reduced rated current I_e /AC1 according to I_e /AC3

3) After each 1x10⁶ operations magnetic core and built-in auxiliary contact block must be changed

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Auxiliary Contacts | | | Type | K(G)3-10 | K(G)3-14 | K(G)3-18 | K(G)3-22 | K(G)3-24 | K(G)3-32 | K(G)3-40 | K3-50 | K3-62 | K3-74 |
|---|--|--|---|----------|-----------------------|----------|----------|----------|-----------------------|----------|-------|----------|-------|
| Rated insulation voltage U_i ¹⁾ | | | V~ | | 690 | | | | - | | | - | |
| Thermal rated current I_{th} to 690V | | | | | 16 | | | | - | | | - | |
| Ambient temperature | | | 40°C A | | 12 | | | | - | | | - | |
| | | | 60°C A | | | | | | - | | | - | |
| Utilization category AC15 | | | | | | | | | | | | | |
| Rated operational current I _e | | | 220-240V A | | 12 | | | | - | | | - | |
| | | | 380-415V A | | 4 | | | | - | | | - | |
| | | | 440V A | | 4 | | | | - | | | - | |
| | | | 500V A | | 3 | | | | - | | | - | |
| | | | 660-690V A | | 1 | | | | - | | | - | |
| Utilization category DC13 | | | | | | | | | | | | | |
| Rated operational current I _e | | | 60V A | | 8 | | | | - | | | - | |
| | | | 110V A | | 1 | | | | - | | | - | |
| | | | 220V A | | 0,1 | | | | - | | | - | |
| Short circuit protection short-circuit current 1kA, contact welding not accepted max. fuse size | | | gL (gG) A | | 25 | | | | - | | | - | |
| For contactors with thermal overload relay the device with the smaller admissible control fuse (contactor or thermal overload relay) determines the fuse. | | | | | | | | | | | | | |
| Control Circuit Power consumption of coils | | | | | | | | | | | | | |
| AC operated | | | inrush VA | | 33-45 | | | | 90-115 | | | 140-165 | |
| | | | sealed VA | | 7-10 | | | | 9-13 | | | 13-18 | |
| | | | W | | 2,6-3 | | | | 2,7-4 | | | 5,4-7 | |
| DC operated | | | inrush W | | 75 | | | | 140 | | | 200 | |
| double winding coil | | | sealed W | | 2 | | | | 2 | | | 6 | |
| DC solenoid operated (KG3) | | | inrush W | | 3 | | | | 4 | | | - | |
| | | | sealed W | | 3 | | | | 4 | | | - | |
| Operation range of coils in multiples of control voltage U _s | | | | | | | | | | | | | |
| | | | AC operated | | 0,85-1,1 | | | | 0,85-1,1 | | | 0,85-1,1 | |
| | | | DC operated | | 0,8-1,1 | | | | 0,8-1,1 | | | 0,8-1,1 | |
| Switching time at control voltage U _s ± 10% ^{2), 3)} | | | | | | | | | | | | | |
| AC operated | | | make time ms | | 8-16 | | | | 10-25 | | | 12-28 | |
| | | | release time ms | | 5-13 | | | | 8-15 | | | 8-15 | |
| | | | arc duration ms | | 10-15 | | | | 10-15 | | | 10-15 | |
| DC operated | | | make time ms | | 8-12 | | | | 10-20 | | | 12-23 | |
| double winding coil | | | release time ms | | 8-13 | | | | 10-15 | | | 10-18 | |
| | | | arc duration ms | | 10-15 | | | | 10-15 | | | 10-15 | |
| DC solenoid operated (KG3) | | | make time ms | | 65 - 85 | | | | 65 - 85 | | | - | |
| | | | release time ms | | 20 - 30 ⁴⁾ | | | | 20 - 30 ⁴⁾ | | | - | |
| | | | arc duration ms | | 10-15 | | | | 10-15 | | | - | |
| Cable cross-section | | | | | | | | | | | | | |
| Auxiliary connector | | | solid mm ² | | 0,75-6 | | | | - | | | - | |
| | | | flexible mm ² | | 1-4 | | | | - | | | - | |
| | | | flexible with multicore cable end mm ² | | 0,75-4 | | | | - | | | - | |
| Magnet coil | | | solid mm ² | | 0,75-2,5 | | | | 0,75-2,5 | | | 0,75-2,5 | |
| | | | flexible mm ² | | 0,5-2,5 | | | | 0,5-2,5 | | | 0,5-2,5 | |
| | | | flexible with multicore cable end mm ² | | 0,5-1,5 | | | | 0,5-1,5 | | | 0,5-1,5 | |
| Clamps per pole | | | | | 2 | | | | 2 | | | 2 | |
| Auxiliary connector | | | solid AWG | | 18 - 10 | | | | - | | | - | |
| | | | flexible AWG | | 18 - 10 | | | | - | | | - | |
| Magnet coil | | | solid AWG | | 14 - 12 | | | | 14 - 12 | | | 14 - 12 | |
| | | | flexible AWG | | 18 - 12 | | | | 18 - 12 | | | 18 - 12 | |
| Clamps per pole | | | | | 2 | | | | 2 | | | 2 | |

1) Suitable for: earthed-neutral systems, overvoltage category I to IV, pollution degree 3 (standard-industry): U_{imp} = 8kV. Data for other conditions on request

2) Total breaking time = release time + arc duration

3) Values for delay of the release time of the make contact and the make time of the break contact will be increased, if magnet coils are protected against voltage peaks (varistor, RC-unit, diode-unit)

4) with built-in coil suppressor

Contactors

Data according to IEC 947-4-1, EN 60947-4-1, VDE 0660

| Type | K3-90 | K3-115 | K3-116 | K3-151 | K3-176 | K3-210 | K3-260 | K3-316 | K3-450 | K3-550 | K3-700 | K3-860 | K3-1000 | K3-1200 |
|-----------------|---------------------|--------|--------|----------------------|--------|--------|----------------------|--------|----------------------------------|--------|----------------------|--------|----------------------|---------|
| V~ | - | | | - | | | - | | 690 | | 690 | | 690 | |
| A | - | | | - | | | - | | 10 | | 10 | | 10 | |
| A | - | | | - | | | - | | - | | - | | - | - |
| - | - | | | - | | | - | | - | | - | | - | - |
| A | - | | | - | | | - | | 3 | | 3 | | 3 | |
| A | - | | | - | | | - | | 2 | | 2 | | 2 | |
| A | - | | | - | | | - | | 1,5 | | 1,5 | | 1,5 | |
| A | - | | | - | | | - | | 1,5 | | 1,5 | | 1,5 | |
| A | - | | | - | | | - | | 1 | | 1 | | 1 | |
| A | - | | | - | | | - | | - | | - | | - | |
| A | - | | | - | | | - | | 1 | | 1 | | 1 | |
| A | - | | | - | | | - | | 0,5 | | 0,5 | | 0,5 | |
| A | - | | | - | | | - | | - | | - | | - | |
| A | - | | | - | | | - | | 10 | | 10 | | 10 | |
| VA | 165-220 | | | 350 | | | 360 | | 800-950 | | 1350-1600 | | 2400 | |
| VA | 2,5-5 | | | 5 | | | 5 | | 9-11 | | 21-25 | | 70 | |
| W | 2,5-5 | | | 5 | | | 5 | | 9-11 | | 21-25 | | 70 | |
| W | 250 | | | 350 | | | 360 | | 700-850 | | 1300-1550 | | 2100 | |
| W | 5 | | | 5 | | | 5 | | 8-10 | | 18-22 | | 60 | |
| W | - | | | - | | | - | | - | | - | | - | |
| W | - | | | - | | | - | | - | | - | | - | |
| ms | 0,85-1,1 0,8-1,1 | | | 0,85-1,1 0,85-1,1 | | | 0,85-1,1 0,85-1,1 | | 0,85-1,1 0,85-1,1 | | 0,85-1,1 0,85-1,1 | | 0,85-1,1 0,85-1,1 | |
| ms | 20-35 | | | 30-60 | | | 40-60 | | 50-100 | | 50-100 | | 50-100 | |
| ms | 35-50 | | | 30-80 | | | 15-45 | | 150-200 / 500-1000 ¹⁾ | | 25-50 | | 25-50 | |
| ms | 10-15 | | | - | | | - | | - | | - | | - | |
| ms | 20-35 | | | 30-60 | | | 40-60 | | - | | - | | - | |
| ms | 35-50 | | | 30-80 | | | 15-45 | | - | | - | | - | |
| ms | 10-15 | | | - | | | - | | - | | - | | - | |
| ms | - | | | - | | | - | | - | | - | | - | |
| ms | - | | | - | | | - | | - | | - | | - | |
| ms | - | | | - | | | - | | - | | - | | - | |
| mm ² | - | | | - | | | - | | 0,75-2,5 | | 0,75-2,5 | | 0,75-2,5 | |
| mm ² | - | | | - | | | - | | 0,75-2,5 | | 0,75-2,5 | | 0,75-2,5 | |
| mm ² | - | | | - | | | - | | - | | - | | - | |
| mm ² | 0,75-2,5 | | | 1-2,5 | | | 1-2,5 | | 1-2,5 | | 1-2,5 | | 1-2,5 | |
| mm ² | 0,5-2,5 | | | 1-2,5 | | | 1-2,5 | | 1-2,5 | | 1-2,5 | | 1-2,5 | |
| mm ² | 0,5-1,5 | | | - | | | - | | - | | - | | - | |
| | 2 | | | 2 | | | 2 | | 2 | | 2 | | 2 | |
| AWG | - | | | - | | | - | | 16 - 12 | | 16 - 12 | | 16 - 12 | |
| AWG | - | | | - | | | - | | 16 - 12 | | 16 - 12 | | 16 - 12 | |
| AWG | 14 - 12 | | | 16 - 12 | | | 16 - 12 | | 16 - 12 | | 16 - 12 | | 16 - 12 | |
| AWG | 18 - 12 | | | 16 - 12 | | | 16 - 12 | | 16 - 12 | | 16 - 12 | | 16 - 12 | |
| | 2 | | | 2 | | | 2 | | 2 | | 2 | | 2 | |

1) Normal or delayed drop is adjustable