


# Specificații



Imaginile sunt doar cu titlu informativ

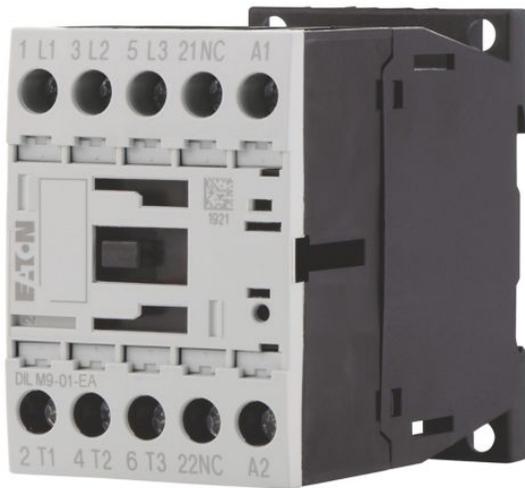

## Eaton 190032

Eaton Moeller® series DILM Contactor, 3 pole, 380 V 400 V 4 kW, 1 NC, 24 V DC, DC operation, Screw terminals DILM9-01-EA(24VDC)

### General specifications

<b>PRODUCT NAME</b>	Eaton Moeller® series DILM contactor
<b>CATALOG NUMBER</b>	190032
<b>EAN</b>	4015081880287
<b>PRODUCT LENGTH/DEPTH</b>	75 mm
<b>PRODUCT HEIGHT</b>	68 mm
<b>PRODUCT WIDTH</b>	45 mm
<b>PRODUCT WEIGHT</b>	0.296 kg
<b>COMPLIANCES</b>	CE CE Marked RoHS conform
<b>MODEL CODE</b>	DILM9-01-EA(24VDC)

**EATON**

Powering Business Worldwide

## Features & Functions

<b>NUMBER OF POLES</b>	Three-pole
------------------------	------------

<b>NUMBER OF POLES</b>	Three-pole
------------------------	------------

<b>NUMBER OF POLES</b>	Three-pole
------------------------	------------

## Climatic environmental conditions

<b>AMBIENT OPERATING TEMPERATURE - MIN</b>	-25 °C
--	--------

<b>AMBIENT OPERATING TEMPERATURE - MAX</b>	60 °C
--	-------

<b>AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MIN</b>	-25 °C
---	--------

<b>AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MAX</b>	40 °C
---	-------

<b>AMBIENT STORAGE TEMPERATURE - MIN</b>	-40 °C
--	--------

<b>AMBIENT STORAGE TEMPERATURE - MAX</b>	80 °C
--	-------

## Electrical rating

<b>RATED OPERATIONAL CURRENT (IE) AT AC-1, 380 V, 400 V, 415 V</b>	22 A
--	------

<b>RATED OPERATIONAL CURRENT (IE) AT AC-3, 380 V, 400 V, 415 V</b>	9 A
--	-----

<b>RATED OPERATIONAL POWER AT AC-3, 380/400 V, 50 HZ</b>	4 kW
--	------

<b>RATED INSULATION VOLTAGE (UI)</b>	690 V
--------------------------------------	-------

## General information

<b>CONNECTION</b>	Screw terminals
-------------------	-----------------

<b>OVERVOLTAGE CATEGORY</b>	III
-----------------------------	-----

<b>POLLUTION DEGREE</b>	3
-------------------------	---

<b>PRODUCT CATEGORY</b>	Contactors
-------------------------	------------

<b>VOLTAGE TYPE</b>	DC
---------------------	----

## Electro magnetic compatibility

<b>INTERFERENCE IMMUNITY</b>	According to EN 60947-1
------------------------------	-------------------------

## Short-circuit rating

<b>SHORT-CIRCUIT CURRENT RATING (BASIC RATING)</b>	5 kA, 30 A max. fuse, SCCR (UL/CSA) 5 kA, 30 A max. CB, SCCR (UL/CSA)
--	--

<b>SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 480 V)</b>	100 kA, 20 A CLASS J max. fuse, SCCR (UL/CSA) 30 kA, 25 A CLASS RK5 max. fuse, SCCR (UL/CSA) 65 kA, 16 A max. CB, SCCR (UL/CSA)
---	---

<b>SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 600 V)</b>	100 kA, 20 A CLASS J max. fuse, SCCR (UL/CSA) 30 kA, 25 A CLASS RK5 max. fuse, SCCR (UL/CSA)
---	---

## Magnet system

<b>DUTY FACTOR</b>	100 %
--------------------	-------

<b>RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MIN</b>	24 V
--	------

<b>RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MAX</b>	24 V
--	------

## Contacts

<b>NUMBER OF AUXILIARY CONTACTS (NORMALLY CLOSED CONTACTS)</b>	1
--	---

<b>NUMBER OF AUXILIARY CONTACTS (NORMALLY OPEN CONTACTS)</b>	0
--	---

<b>NUMBER OF CONTACTS (NORMALLY CLOSED) AS MAIN CONTACT</b>	0
---	---

## Design verification

<b>EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID</b>	0.9 W
<b>HEAT DISSIPATION CAPACITY PDISS</b>	0 W
<b>HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID</b>	0.3 W
<b>STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS</b>	4.5 W
<b>10.2.2 CORROSION RESISTANCE</b>	Meets the product standard's requirements.
<b>10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES</b>	Meets the product standard's requirements.
<b>10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT</b>	Meets the product standard's requirements.
<b>10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS</b>	Meets the product standard's requirements.
<b>10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION</b>	Meets the product standard's requirements.
<b>10.2.5 LIFTING</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.2.6 MECHANICAL IMPACT</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.2.7 INSCRIPTIONS</b>	Meets the product standard's requirements.
<b>10.3 DEGREE OF PROTECTION OF ASSEMBLIES</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.4 CLEARANCES AND CREEPAGE DISTANCES</b>	Meets the product standard's requirements.
<b>10.5 PROTECTION AGAINST ELECTRIC SHOCK</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS</b>	Is the panel builder's responsibility.

## Resurse

<b>CHARACTERISTIC CURVE</b>	<a href="#">eaton-contactors-switch-dilm-characteristic-curve-002.eps</a> <a href="#">eaton-contactors-switch-dilm-characteristic-curve.eps</a>
<b>DECLARATIONS OF CONFORMITY</b>	<a href="#">eaton-contactor-declaration-of-conformity-uk251210en.pdf</a> <a href="#">eaton-contactors-module-dilm-dimensions-002.eps</a> <a href="#">eaton-contactors-module-dilm-dimensions.eps</a>
<b>DESENE</b>	<a href="#">eaton-contactors-frame-dilm-dimensions.eps</a> <a href="#">eaton-contactors-dilm-3d-drawing-007.eps</a>
<b>INSTRUCȚIUNI DE INSTALARE</b>	<a href="#">IL034041ZU</a>

<b>10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS</b>	Is the panel builder's responsibility.
<b>10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH</b>	Is the panel builder's responsibility.
<b>10.9.3 IMPULSE WITHSTAND VOLTAGE</b>	Is the panel builder's responsibility.
<b>10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL</b>	Is the panel builder's responsibility.
<b>10.10 TEMPERATURE RISE</b>	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
<b>10.11 SHORT-CIRCUIT RATING</b>	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
<b>10.12 ELECTROMAGNETIC COMPATIBILITY</b>	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
<b>10.13 MECHANICAL FUNCTION</b>	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

**DENUMIREA PROIECTULUI:**

**NUMĂRUL PROIECTULUI:**

**PREGĂTIT DE:**

**DATA:**



**Eaton Corporation plc** Eaton House  
30 Pembroke Road  
Dublin 4, Irlanda  
Eaton.com

Urmăriți-ne pe rețelele de socializare pentru a obține cele mai noi informații despre produse și asistență.

© 2026 Eaton. Toate drepturile rezervate

